


Track lighting 2024 EN

**AQFORM**  
LIGHTING SOLUTIONS

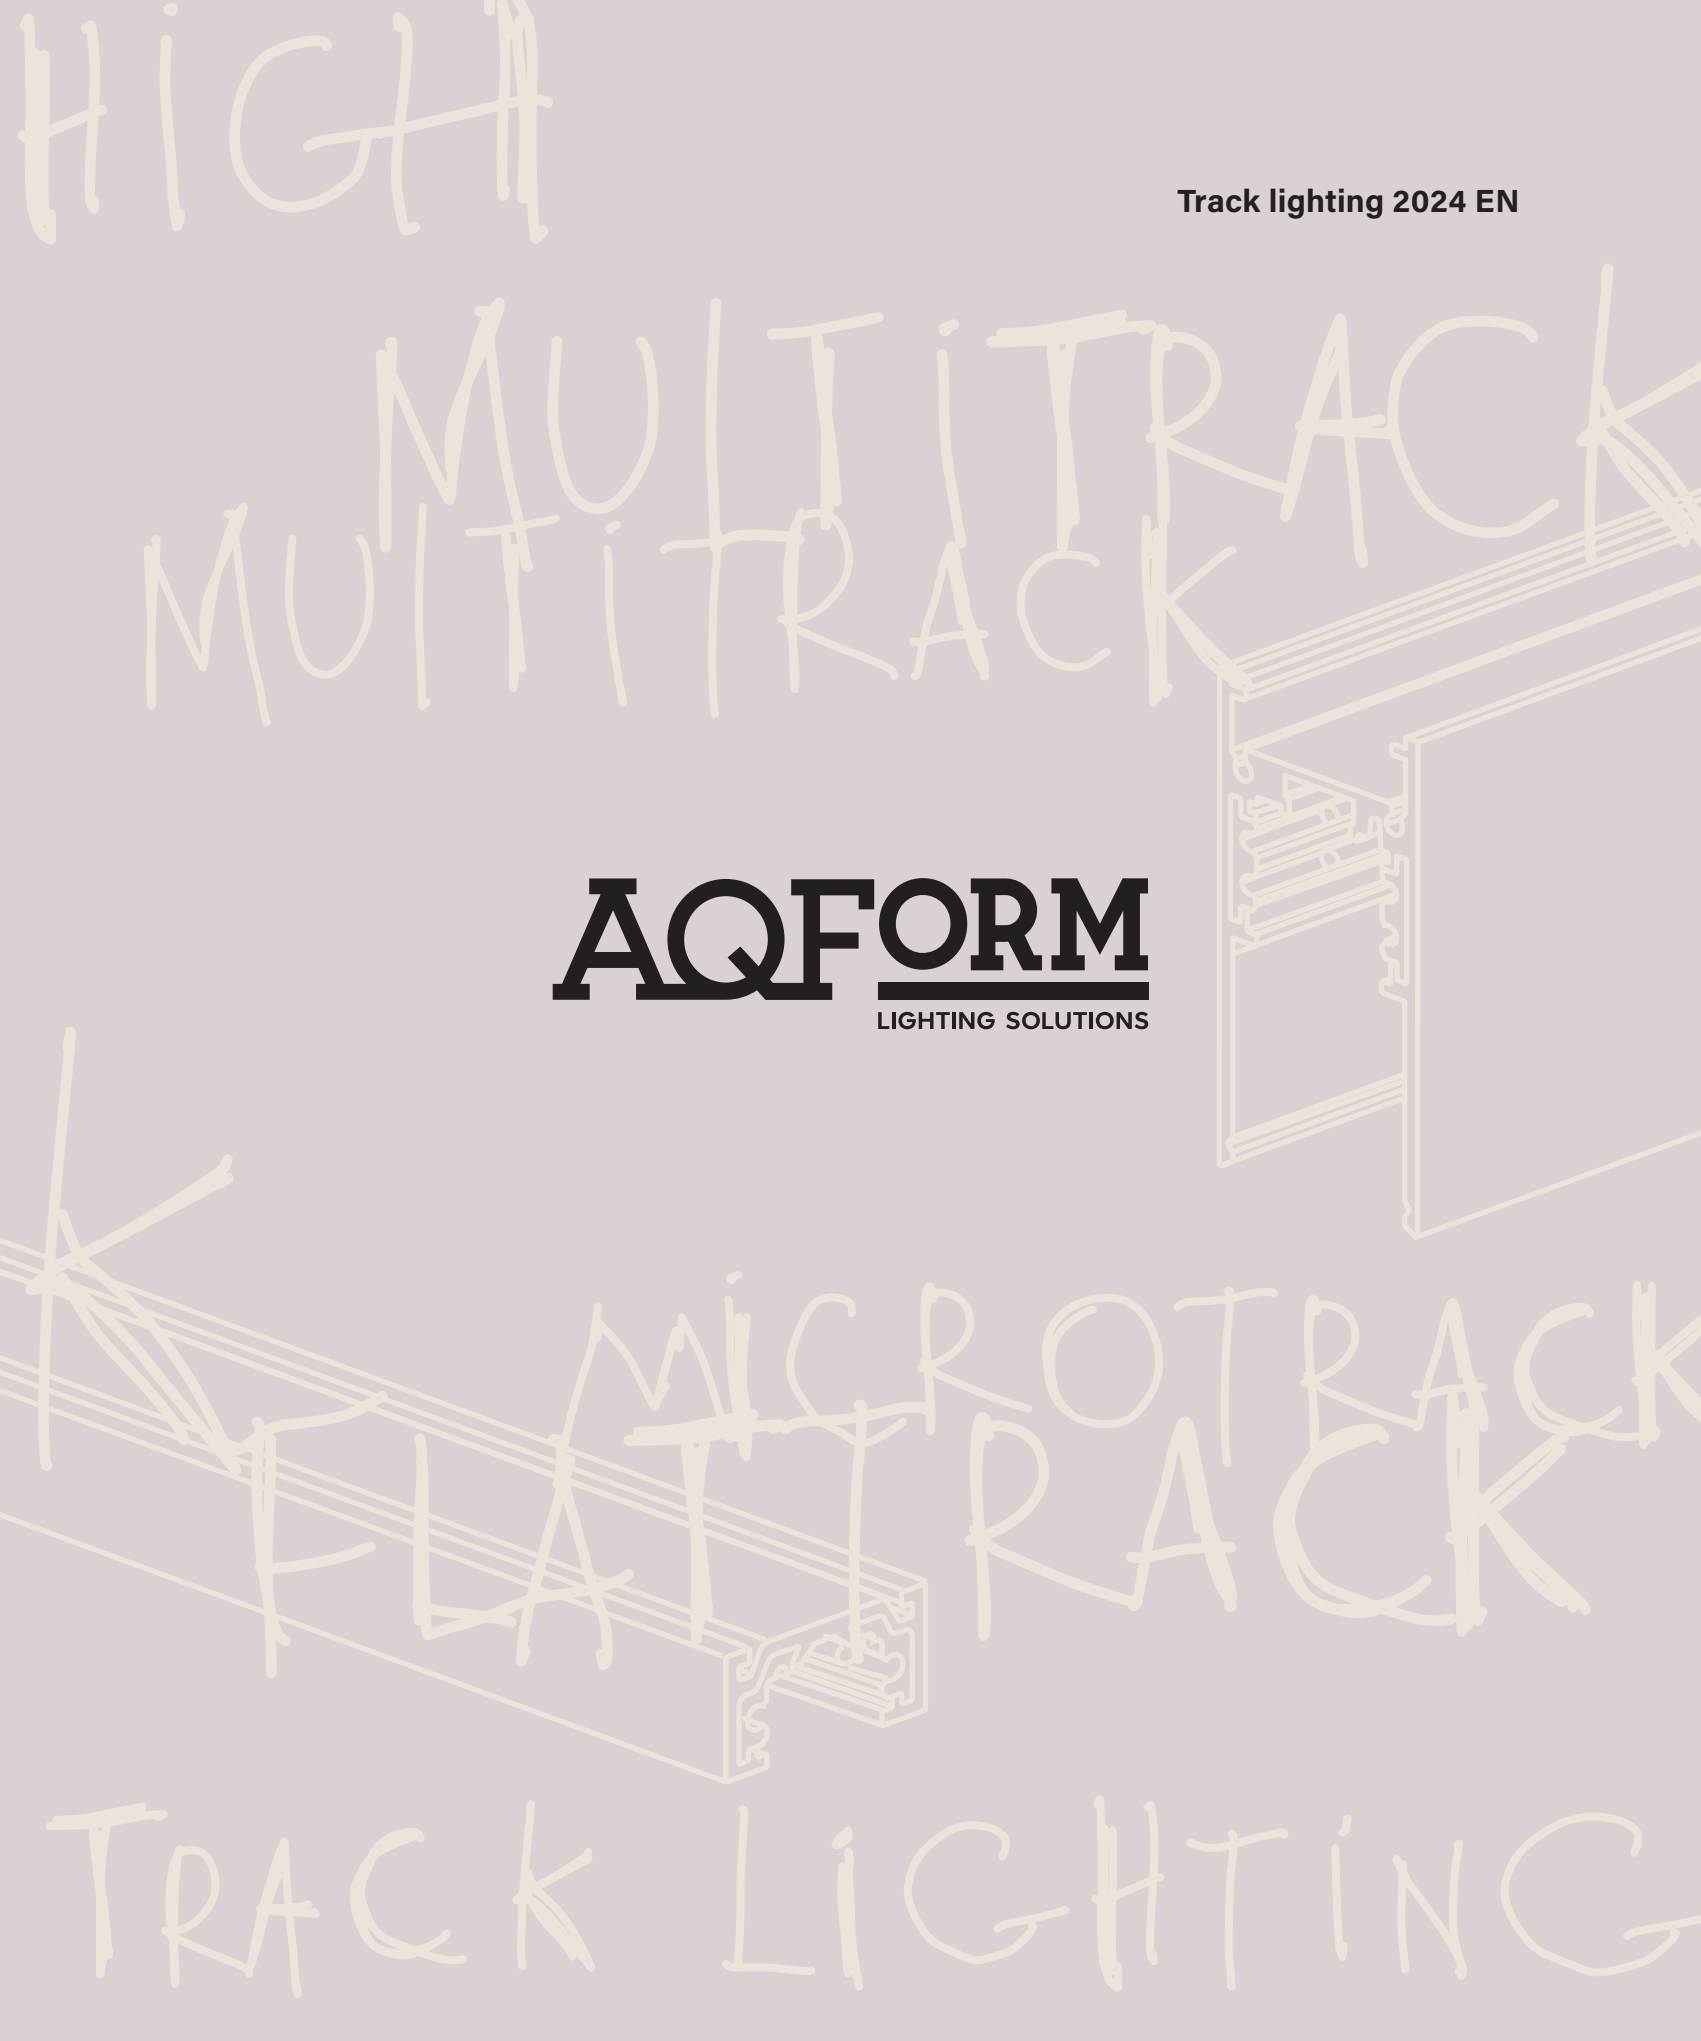

# Contents

Multitrack & High multitrack	<a href="#">p. 12</a>
Flattrack	<a href="#">p. 32</a>
Microtrack	<a href="#">p. 40</a>
3F Track	<a href="#">p. 48</a>
Luminaires	<a href="#">p. 62</a>





# Tracks

– a way to achieve well-adapted lighting

Lighting tracks are very flexible solutions. Their main advantages are powering many luminaires from one point and the ability to easily change the arrangement and number of luminaires. They are perfect for shops, galleries and restaurants, but also for residential interiors.

MULTITRACK models are distinguished by their simple form and safe voltage of 48V inside the track. They can be mounted not only on the ceiling, but also on the wall, within easy reach.

MULTITRACK offers a surface-mounted version with a shorter track height. It can also be used as a suspended solution. There is also a recessed variant. In both cases, the frame adapters are flush with the edge of the track. Higher versions – surface-mounted and recessed – are solutions in which the linear fixtures are completely hidden in the track.


3F tracks are very popular systems. They are available in a surface-mounted version (which, when supplemented with cable slings, will serve as a suspended version), as well as a recessed version, available to order. 3F tracks are also available in the DALI version.

DOBRY  
ZAPROJEKTOWANE





SZYKOPROJEKTY

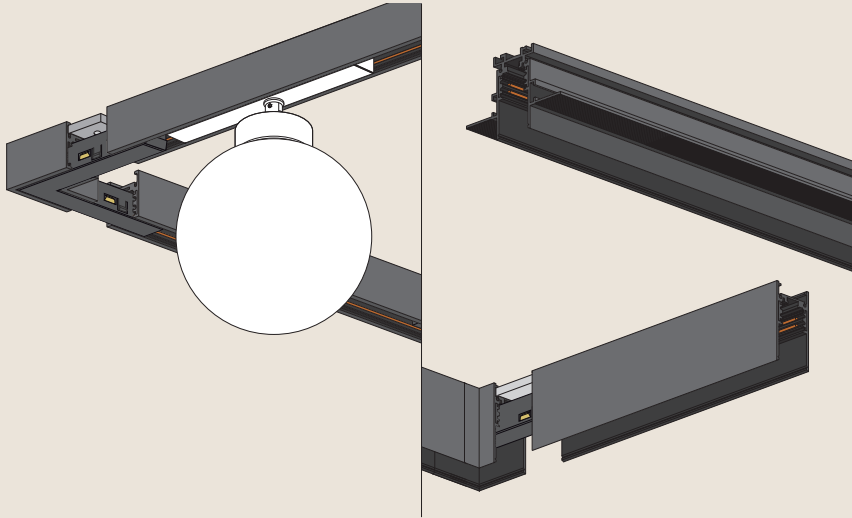

**MULTITRACK**  
**surface | suspended | recessed**

48V | max 2 metres in one piece | ON-OFF (one or two circuits) | DALI | can be safely installed on walls | requires 48V power supply

System based on small-sized lighting tracks with a very simple form. Available accessories and connectors allow for creating elaborate configurations, including transitions from the ceiling to the wall.



Inside the track rail, a safe 48V voltage is used, making the MULTITRACK system suitable for locations within arm's reach. It requires a separate power supply. The system offers various control options, including two independent circuits using two power supplies and Casambi or DALI control.

**HIGH MULTITRACK**  
**surface | suspended | recessed**

48V | max 3 metres in one piece | ON-OFF (one or two circuits) | DALI | can be safely installed on walls | requires 48V power supply

A higher version of the MULTITRACK system, retaining all its advantages. It utilizes the same electrical accessories and allows for transitions from the ceiling to the wall. Due to its increased depth of the HIGH MULTITRACK system, linear luminaires fit seamlessly within the track, and the adapters and electrical connectors become nearly invisible. This creates an elegant, uniform line.

Like any low-voltage system, HIGH MULTITRACK requires an appropriate power supply and electrical connection.

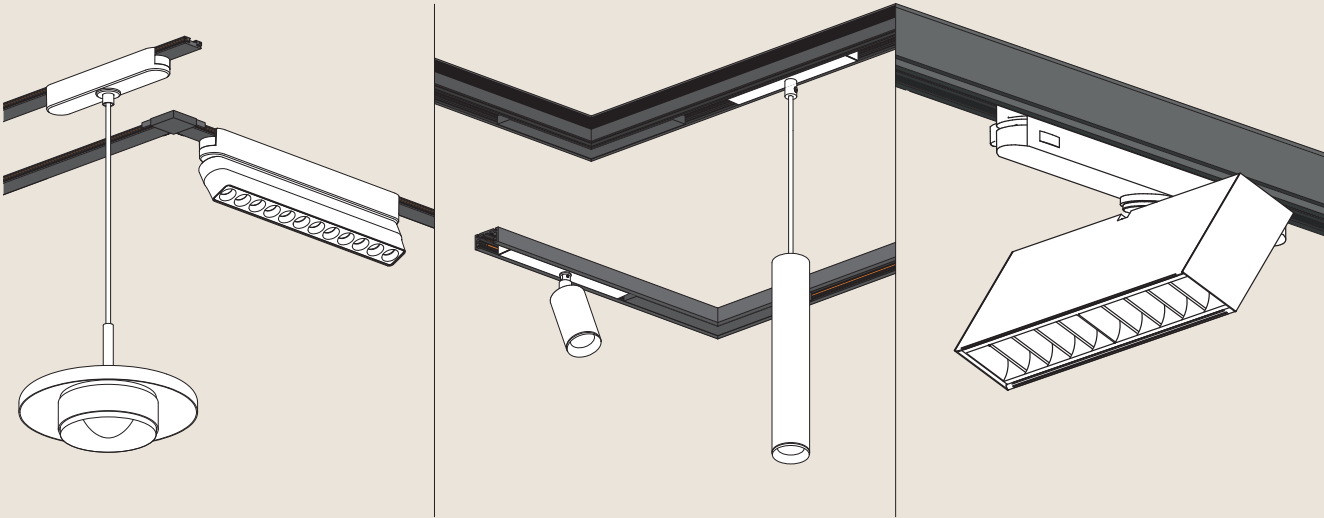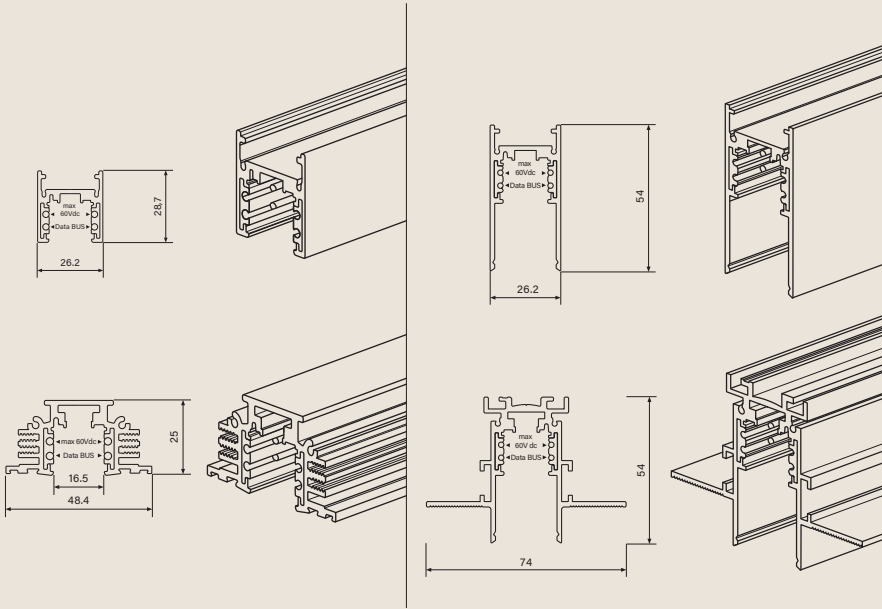

**FLATTRACK**  
**surface**

48V | max 3 metres in one piece | ON-OFF  
Extremely thin | can be safely installed on walls  
Requires 48V power supply | DALI version coming soon

FLATTRACK is the flattest of all AQForm lighting track systems. The copper wires are coated with graphite, giving them a colour similar to the black of the track itself. By running them along the sides of the track, the most visible surface remains flat and elegant. A wide selection of connectors allows for creating elaborate track configurations.

FLATTRACK is a low-voltage track system (48V). It can be used on walls, within arm's reach. It requires a power supply.

**MICROTRACK**  
**surface | recessed**

48V | max 2 metres in one piece | ON-OFF | DALI  
Extremely thin | can be safely installed on walls  
Requires 48V power supply

A delicately designed track system with compact dimensions. The recessed version creates a narrow slit in the finished suspended ceiling, measuring just 11 millimeters in width.

The surface-mounted model is only about 2 centimeters wide and 1 centimeter high. It allows for transitions from the wall to the ceiling.


This is a low-voltage system operating at 48V, which requires the use of a power supply.

**3F and 3F DALI**  
**3F surface | 3F recessed | DALI surface | DALI recessed**

230V | max 3 metres in one piece | ON-OFF (three circuits) | DALI

The most popular system powered by 230V. To connect it, a standard cable on the ceiling and a power end cap or one of the connectors with the possibility of power connection (straight connector, "L", "T" or "X") are sufficient. 3F tracks allow the luminaires to be divided into three circuits, so that they work independently. This requires running a 5-wire cable between the switches on the wall and connecting the track.

There is also a DALI 3F version available for indoor use with a wired digital control system based on the DALI protocol.

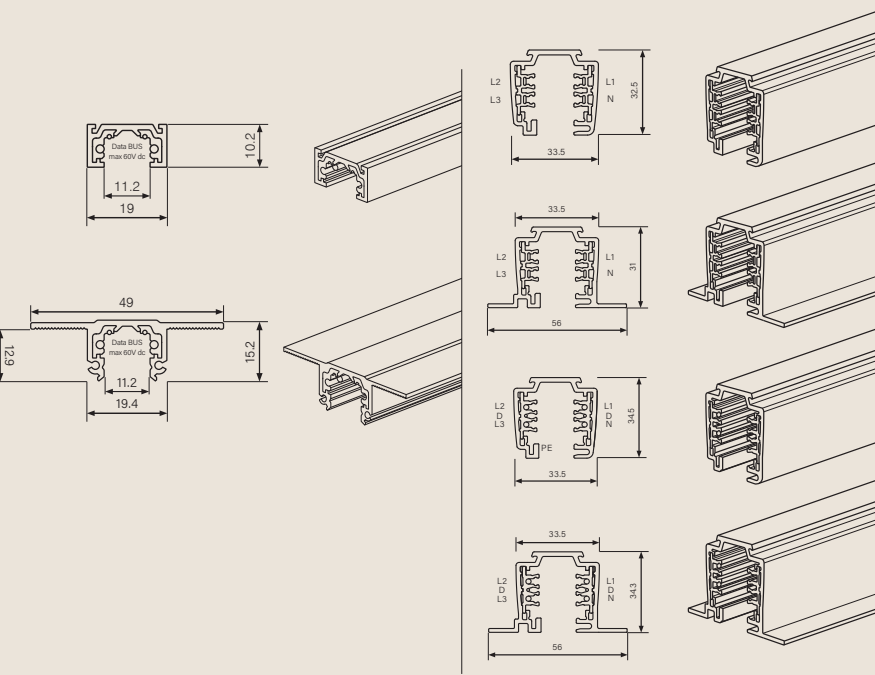











# Multitrack & High Multitrack


## Flexibility in a simple form

The MULTITRACK system is available in surface-mounted, suspended and recessed versions, as well as in two depths.

Available accessories and connectors allow you to create complex systems, even with adirect transition from the ceiling to the wall.

There is a safe voltage of 48V inside the track, so the MULTITRACK system can also be used in places within easy reach.

The MULTITRACK system requires a separate power supply. It can be installed in a suspended ceiling or in built-in furniture. Another solution is to use the power supply in a surface-mounted box mounted on the ceiling and constituting an extension of the track. There is also a power supply plugged directly into the track (exactly the same as the luminaires), as well as a power supply mounted on a DIM rail in the distribution box. There are plenty of possibilities. Each of them requires slightly different electrical installation.

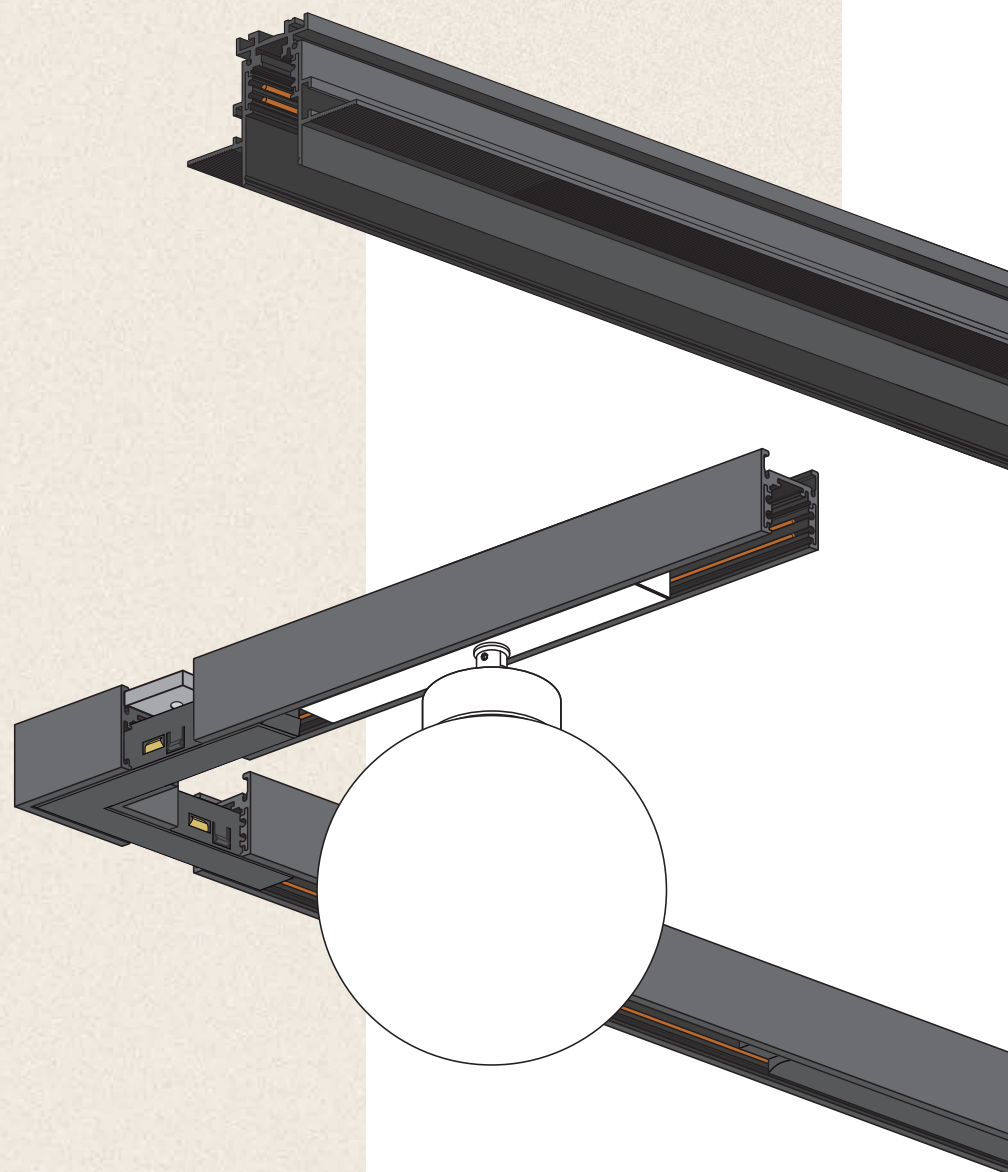




MULTITRACK



In MULTITRACK system the adapter flush with the track edges. Recessed version do not require any special construction of the ceiling and can be installed in already existing but not yet finished soffit.

MULTITRACK surface and MULTITRACK recessed are available in QS range.




HIGH MULTITRACK




In HIGH MULTITRACK system the adapter recess completely inside the track. Thus tiltable parts of the luminaires need a longer joint: thanks to longer elements they can still be easily adjusted. For proper installation of this system it is required to prepare construction of the suspended ceiling before installation of the track.

HIGH MULTITRACK recessed system is available in the QS range.



MULTITRACK

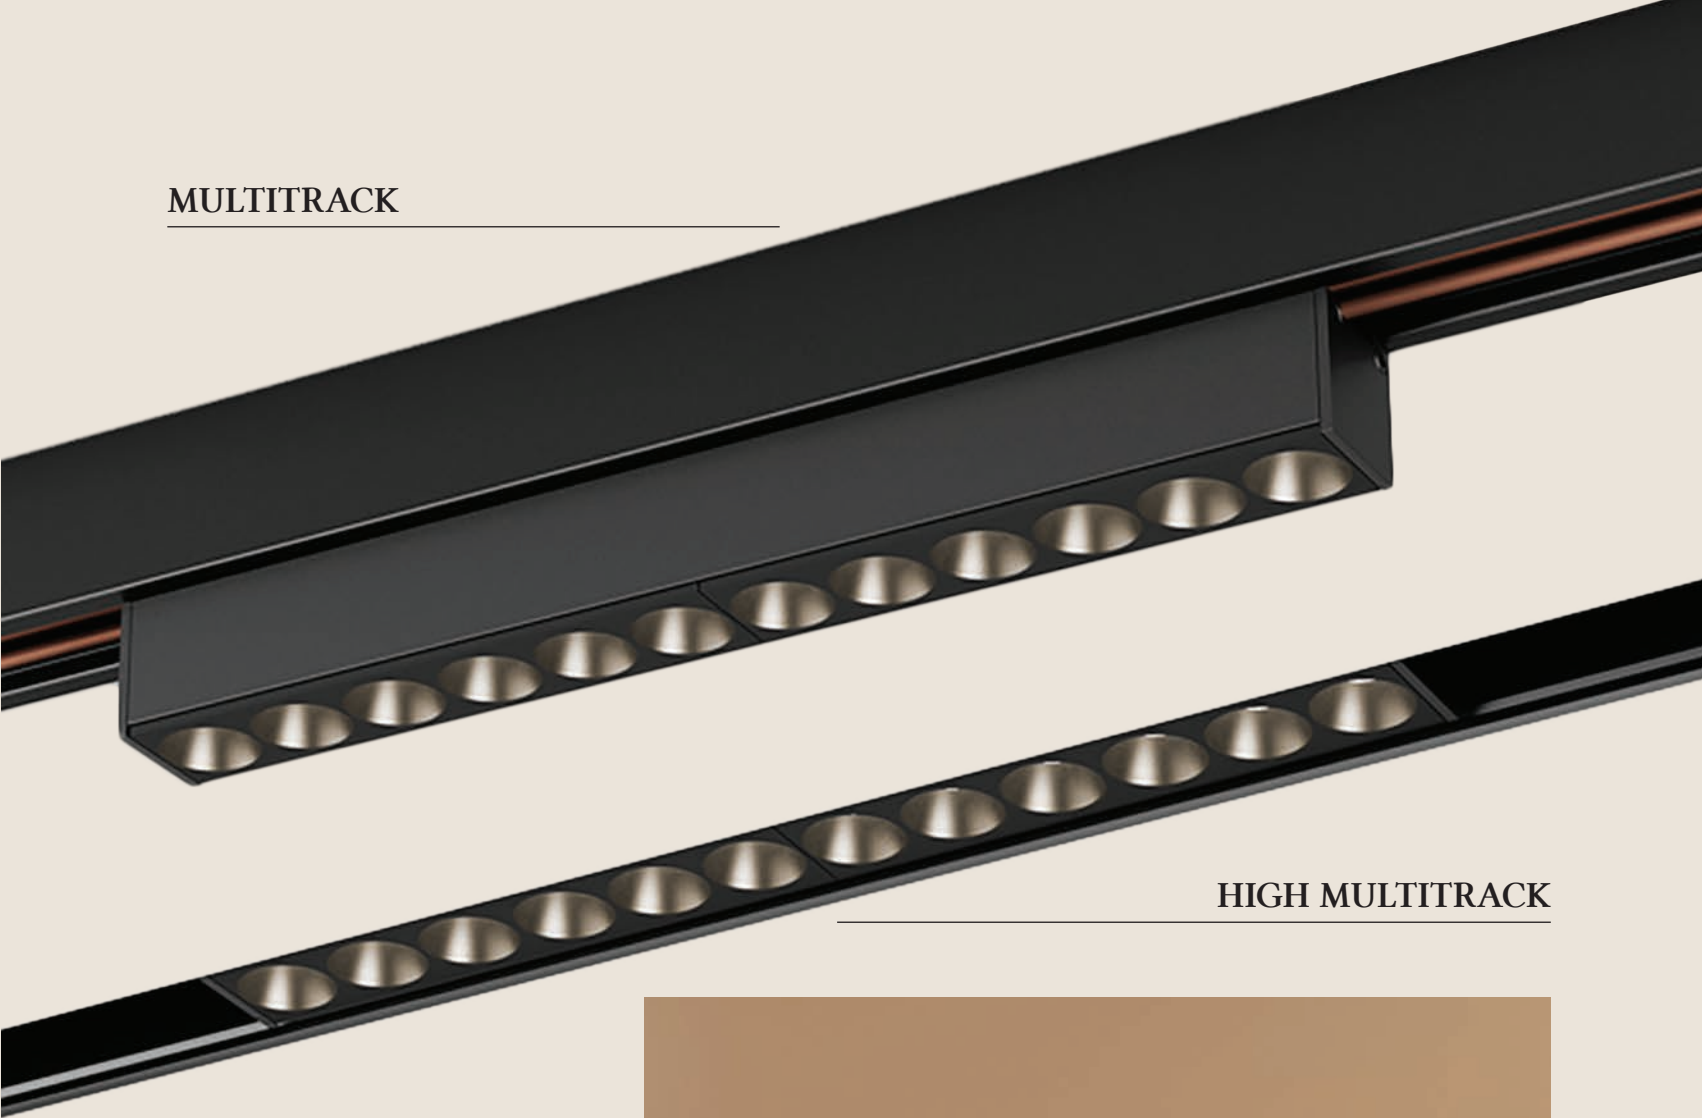

HIGH MULTITRACK

For the higher rail height, the HIGH version of the MULTITRACK products allows you to immerse the luminaires in the rail so that the entire adapter is hidden in it. Some fixtures can be completely flush with the rail surface. An example is the new RAFTER mini.

















# MULTITRACK

## Safe voltage 48V & wall-ceiling arrangements

The voltage inside the MULTITRACK, thanks to which you can freely design this system within arm's reach.

A large selection of connectors and safe voltage make the MULTITRACK easy to place on the wall.


48V | max 3 metres in one piece | ON-OFF (one or two circuits) | DALI  
Can be safely installed on walls | requires 48V power supply

## System flexibility + controls and lighting scenes

The possibility of supplying many luminaires from one electrical point and the ease of changing the arrangement of lamps within the track are an advantage both at the design stage and in later use.

The track itself allows for division into two circuits and connection of DALI control. MULTITRACK luminaires are available in: ON/OFF and DALI versions, which is compatible with the wireless AQsmart.


## Maximum load

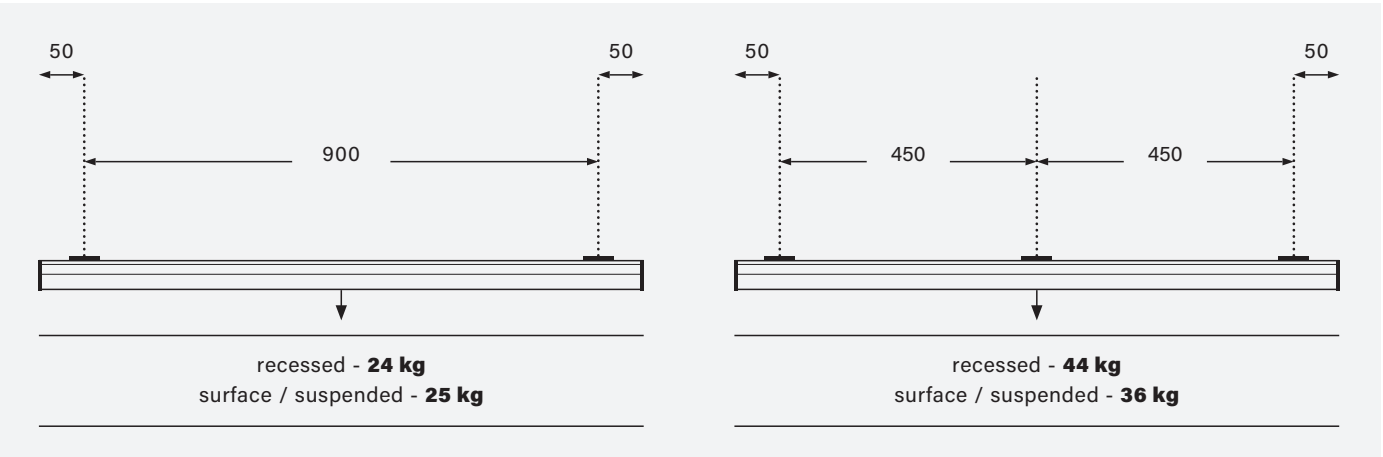

tracks	colour	cat. no
surface 1000mm	black	SMCM1DAB
	white	SMCM1DAW
surface 2000mm	black	SMCM2DAB
	white	SMCM2DAW
suspended 1000mm	black	SMSM1DAB
	white	SMSM1DAW
suspended 2000mm	black	SMSM2DAB
	white	SMSM2DAW

tracks	colour	cat. no
recessed 1000mm	black	SMRM1DAB
	white	SMRM1DAW
recessed 2000mm	black	SMRM2DAB
	white	SMRM2DAW



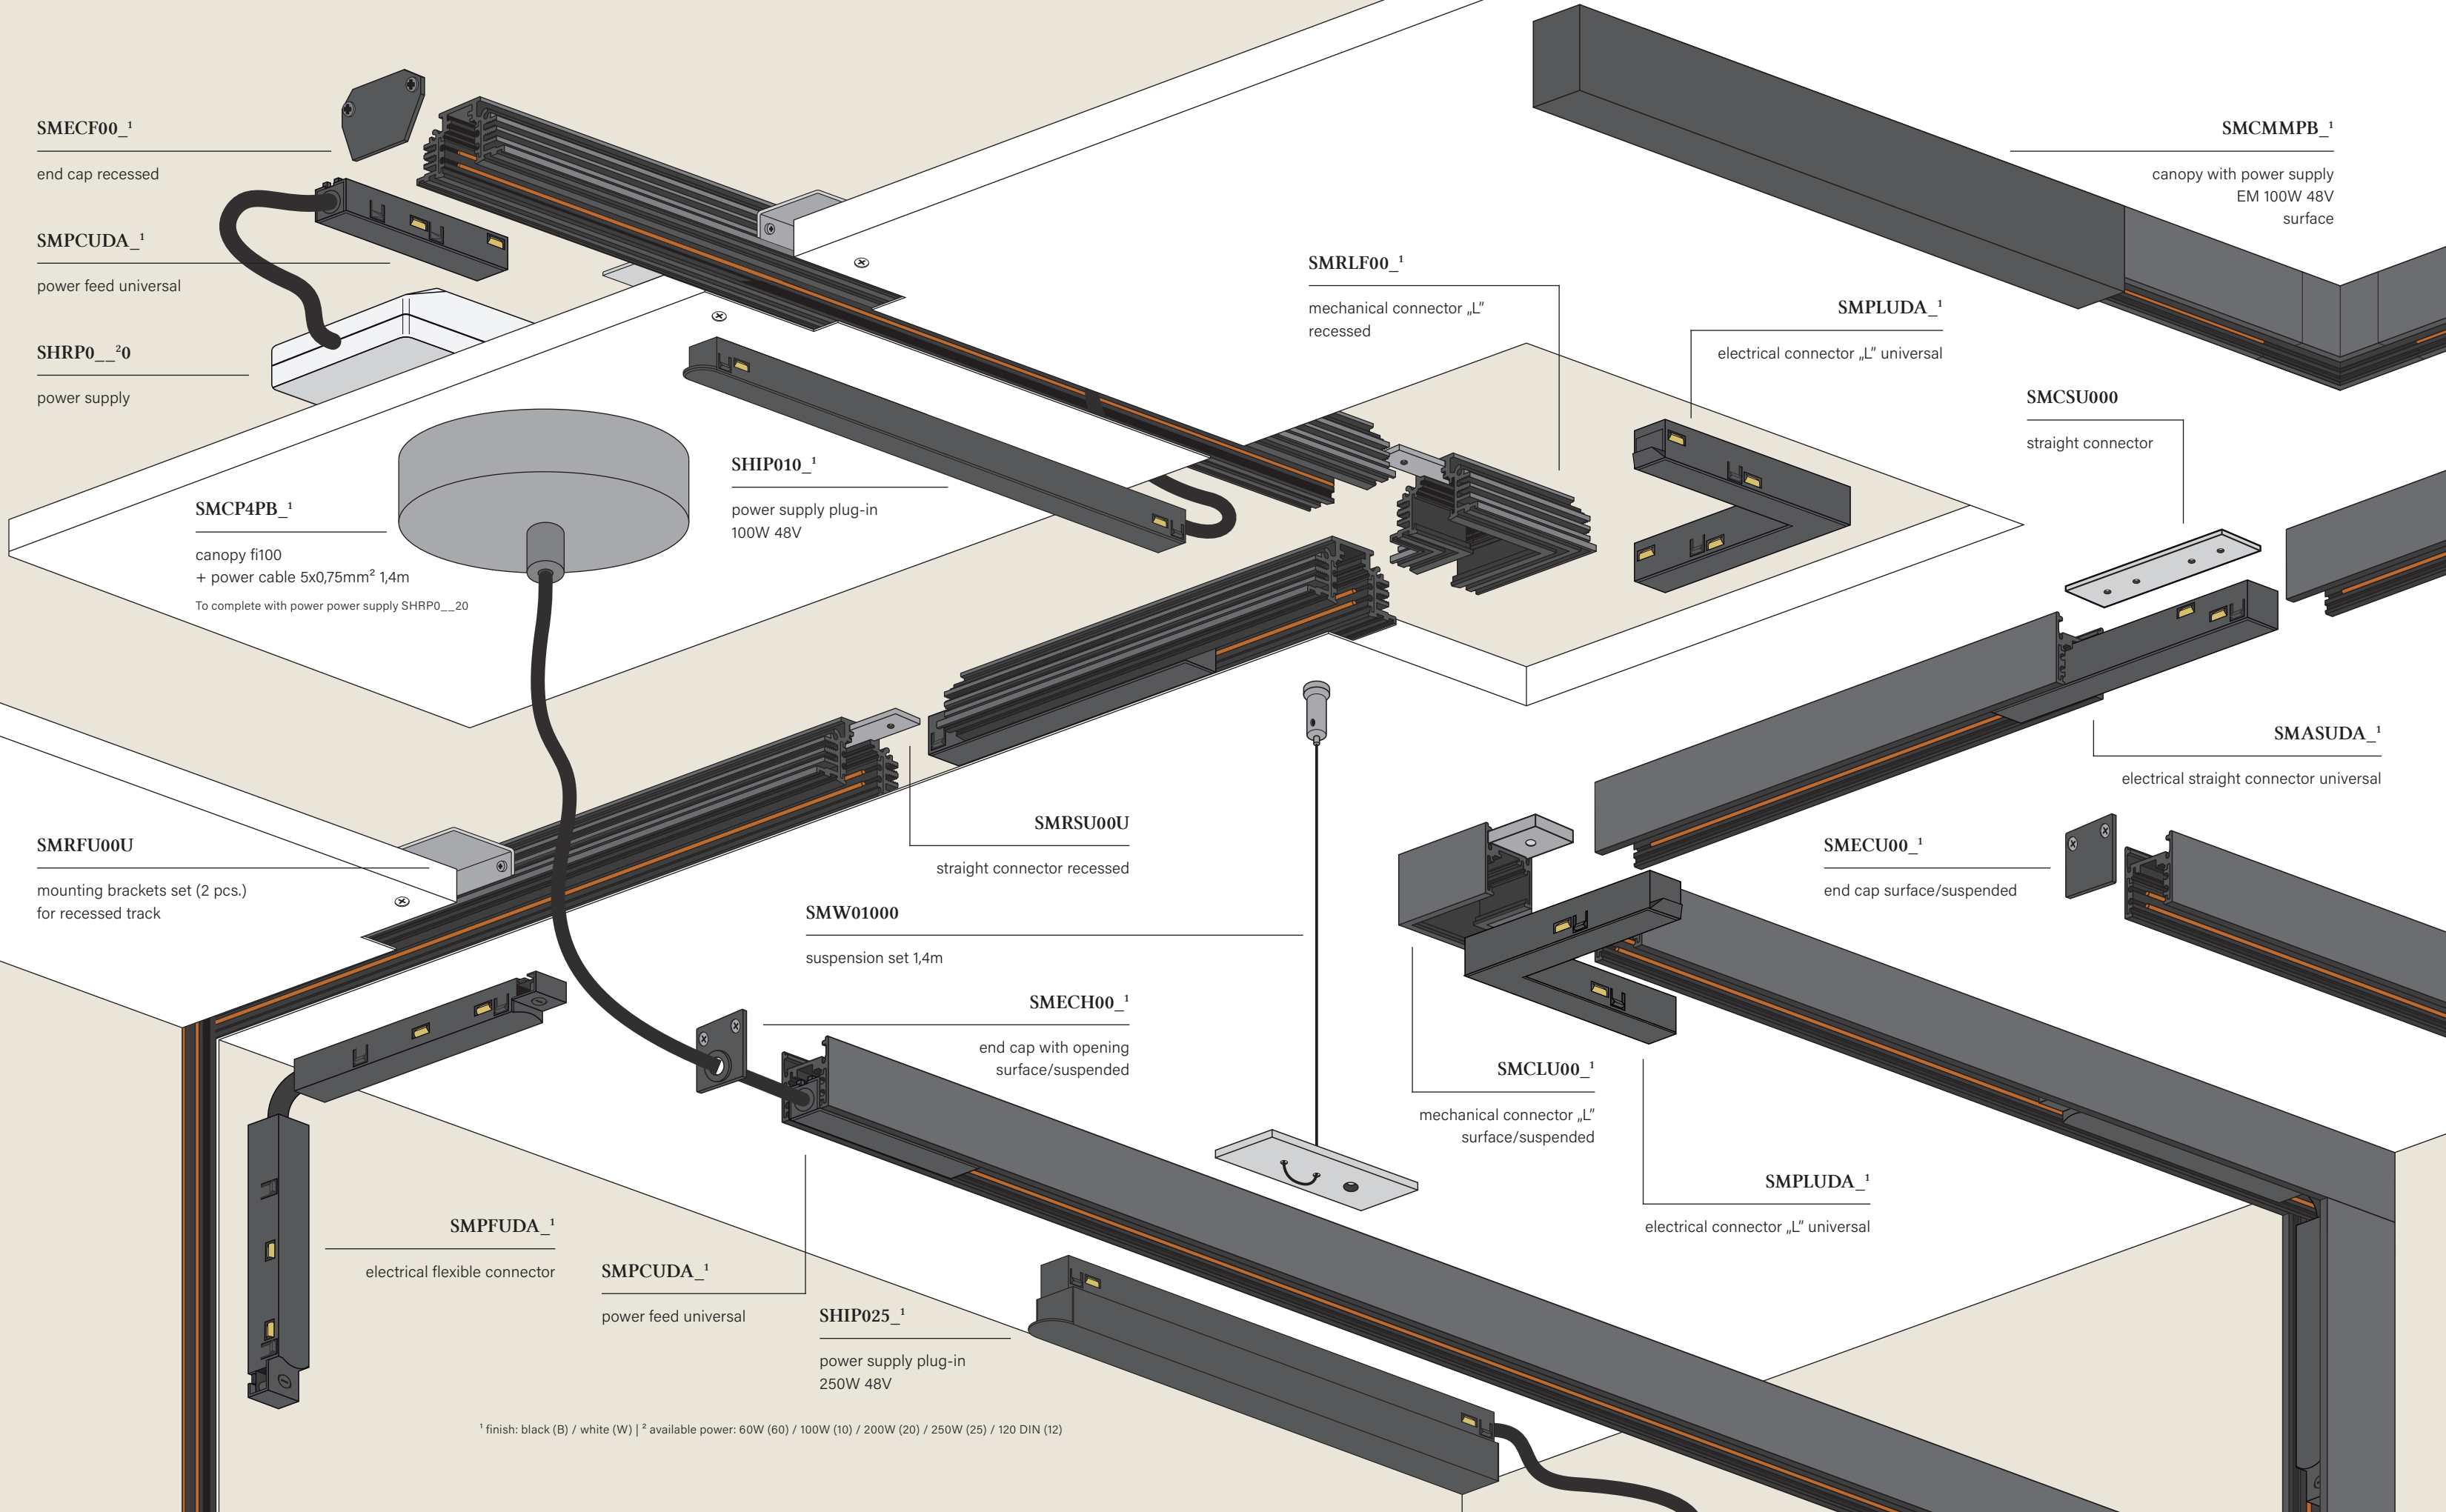

SMECF00\_1

end cap recessed

SMPCUDA\_1

power feed universal

SHRP0\_\_20

power supply

SMCP4PB\_1

canopy fi100  
+ power cable 5x0,75mm<sup>2</sup> 1,4m  
To complete with power power supply SHRP0\_\_20

SHIP010\_1

power supply plug-in  
100W 48V

SMRLF00\_1

mechanical connector „L”  
recessed

SMPLUDA\_1

electrical connector „L” universal

SMCMMPB\_1

canopy with power supply  
EM 100W 48V  
surface

SMCSU000

straight connector

SMRFU00U

mounting brackets set (2 pcs.)  
for recessed track

SMRSU00U

straight connector recessed

SMW01000

suspension set 1,4m

SMECH00\_1

end cap with opening  
surface/suspended

SMASUDA\_1

electrical straight connector universal

SMECU00\_1

end cap surface/suspended

SMCLU00\_1

mechanical connector „L”  
surface/suspended

SMPLUDA\_1

electrical connector „L” universal

SMPFUDA\_1

electrical flexible connector

SMPCUDA\_1

power feed universal

SHIP025\_1

power supply plug-in  
250W 48V



# HIGH MULTITRACK


## MULTITRACK features + increased track height

The HIGH MULTITRACK system was designed for installation in plasterboard ceilings and walls. The low voltage inside the track allows installation within arm's reach, and thanks to the track recess in the wall or ceiling surface, we get an almost entirely hidden "runner" for the luminaires.

48V | max 3 metres in one piece | ON-OFF (one or two circuits) | DALI  
Can be safely installed on walls | requires 48V power supply

## Greater track height = more hidden fixture mounting elements


The greater height of the HIGH MULTITRACK track than in the basic variant means that the fixing element is completely invisible to the observer for most luminaires. Luminaires from the RAFTER mini series in the HIGH MULTITRACK system allow the entire lighting element to be flush with the ceiling.

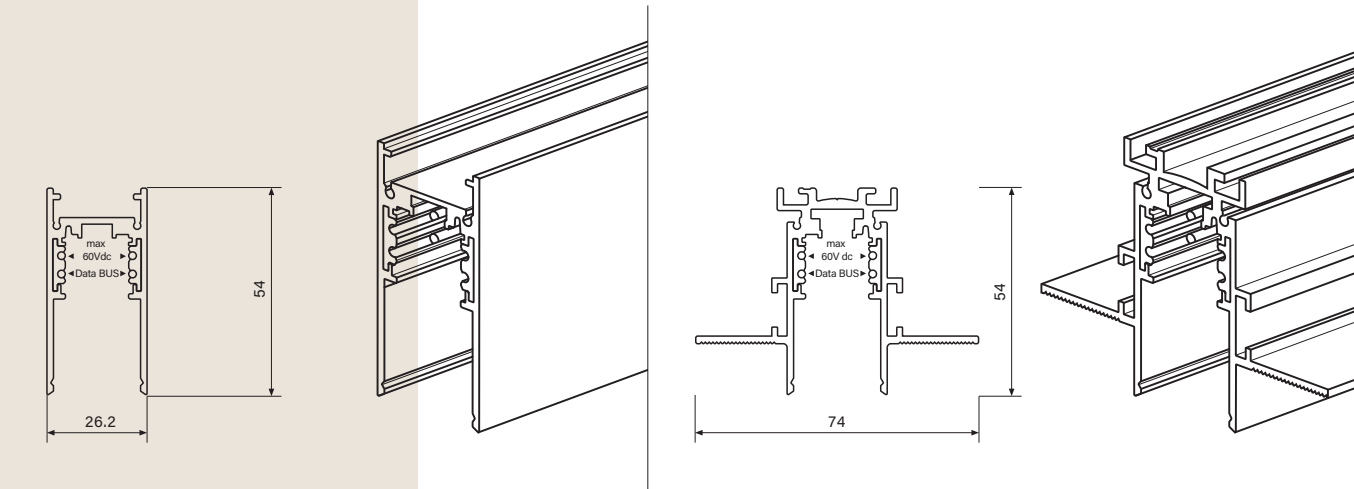

tracks	colour	cat. no
surface 1000mm	black	SHCM1DAB
	white	SHCM1DAW
surface 2000mm	black	SHCM2DAB
	white	SHCM2DAW
surface 3000mm	black	SHCM3DAB
	white	SHCM3DAW
suspended 1000mm	black	SHSM1DAB
	white	SHSM1DAW
suspended 2000mm	black	SHSM2DAB
	white	SHSM2DAW
suspended 3000mm	black	SHSM3DAB
	white	SHSM3DAW

tracks	colour	cat. no
recessed 1000mm	black	SHRM1DAB
	white	SHRM1DAW
recessed 2000mm	black	SHRM2DAB
	white	SHRM2DAW
recessed 3000mm	black	SHRM3DAB
	white	SHRM3DAW

## Maximum load

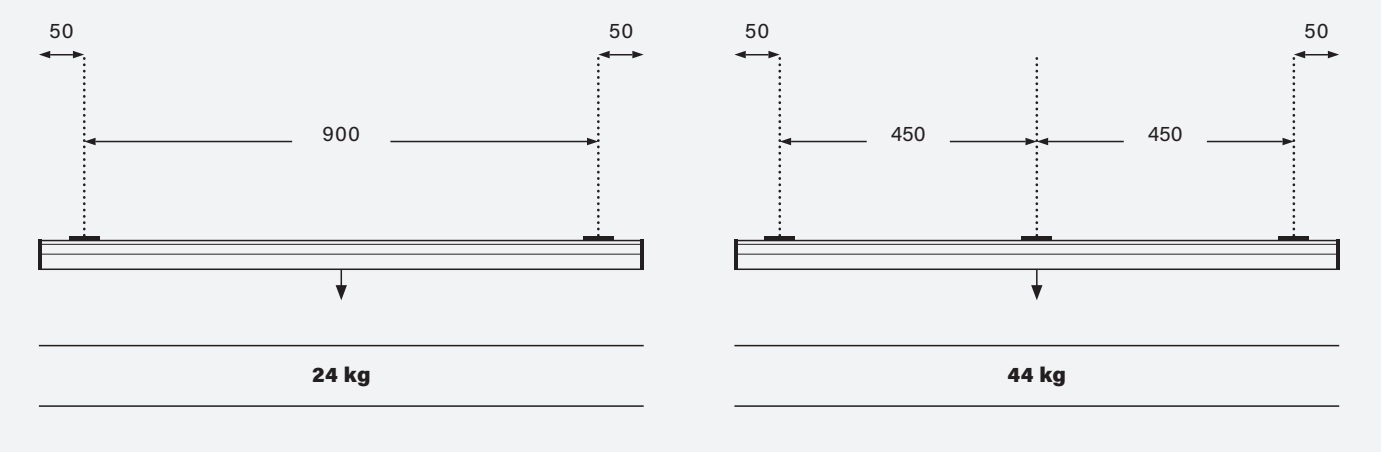

RECESSED




MODERN BALL simple - [p. 86](#)

PET mini - [p. 72](#)

SURFACE





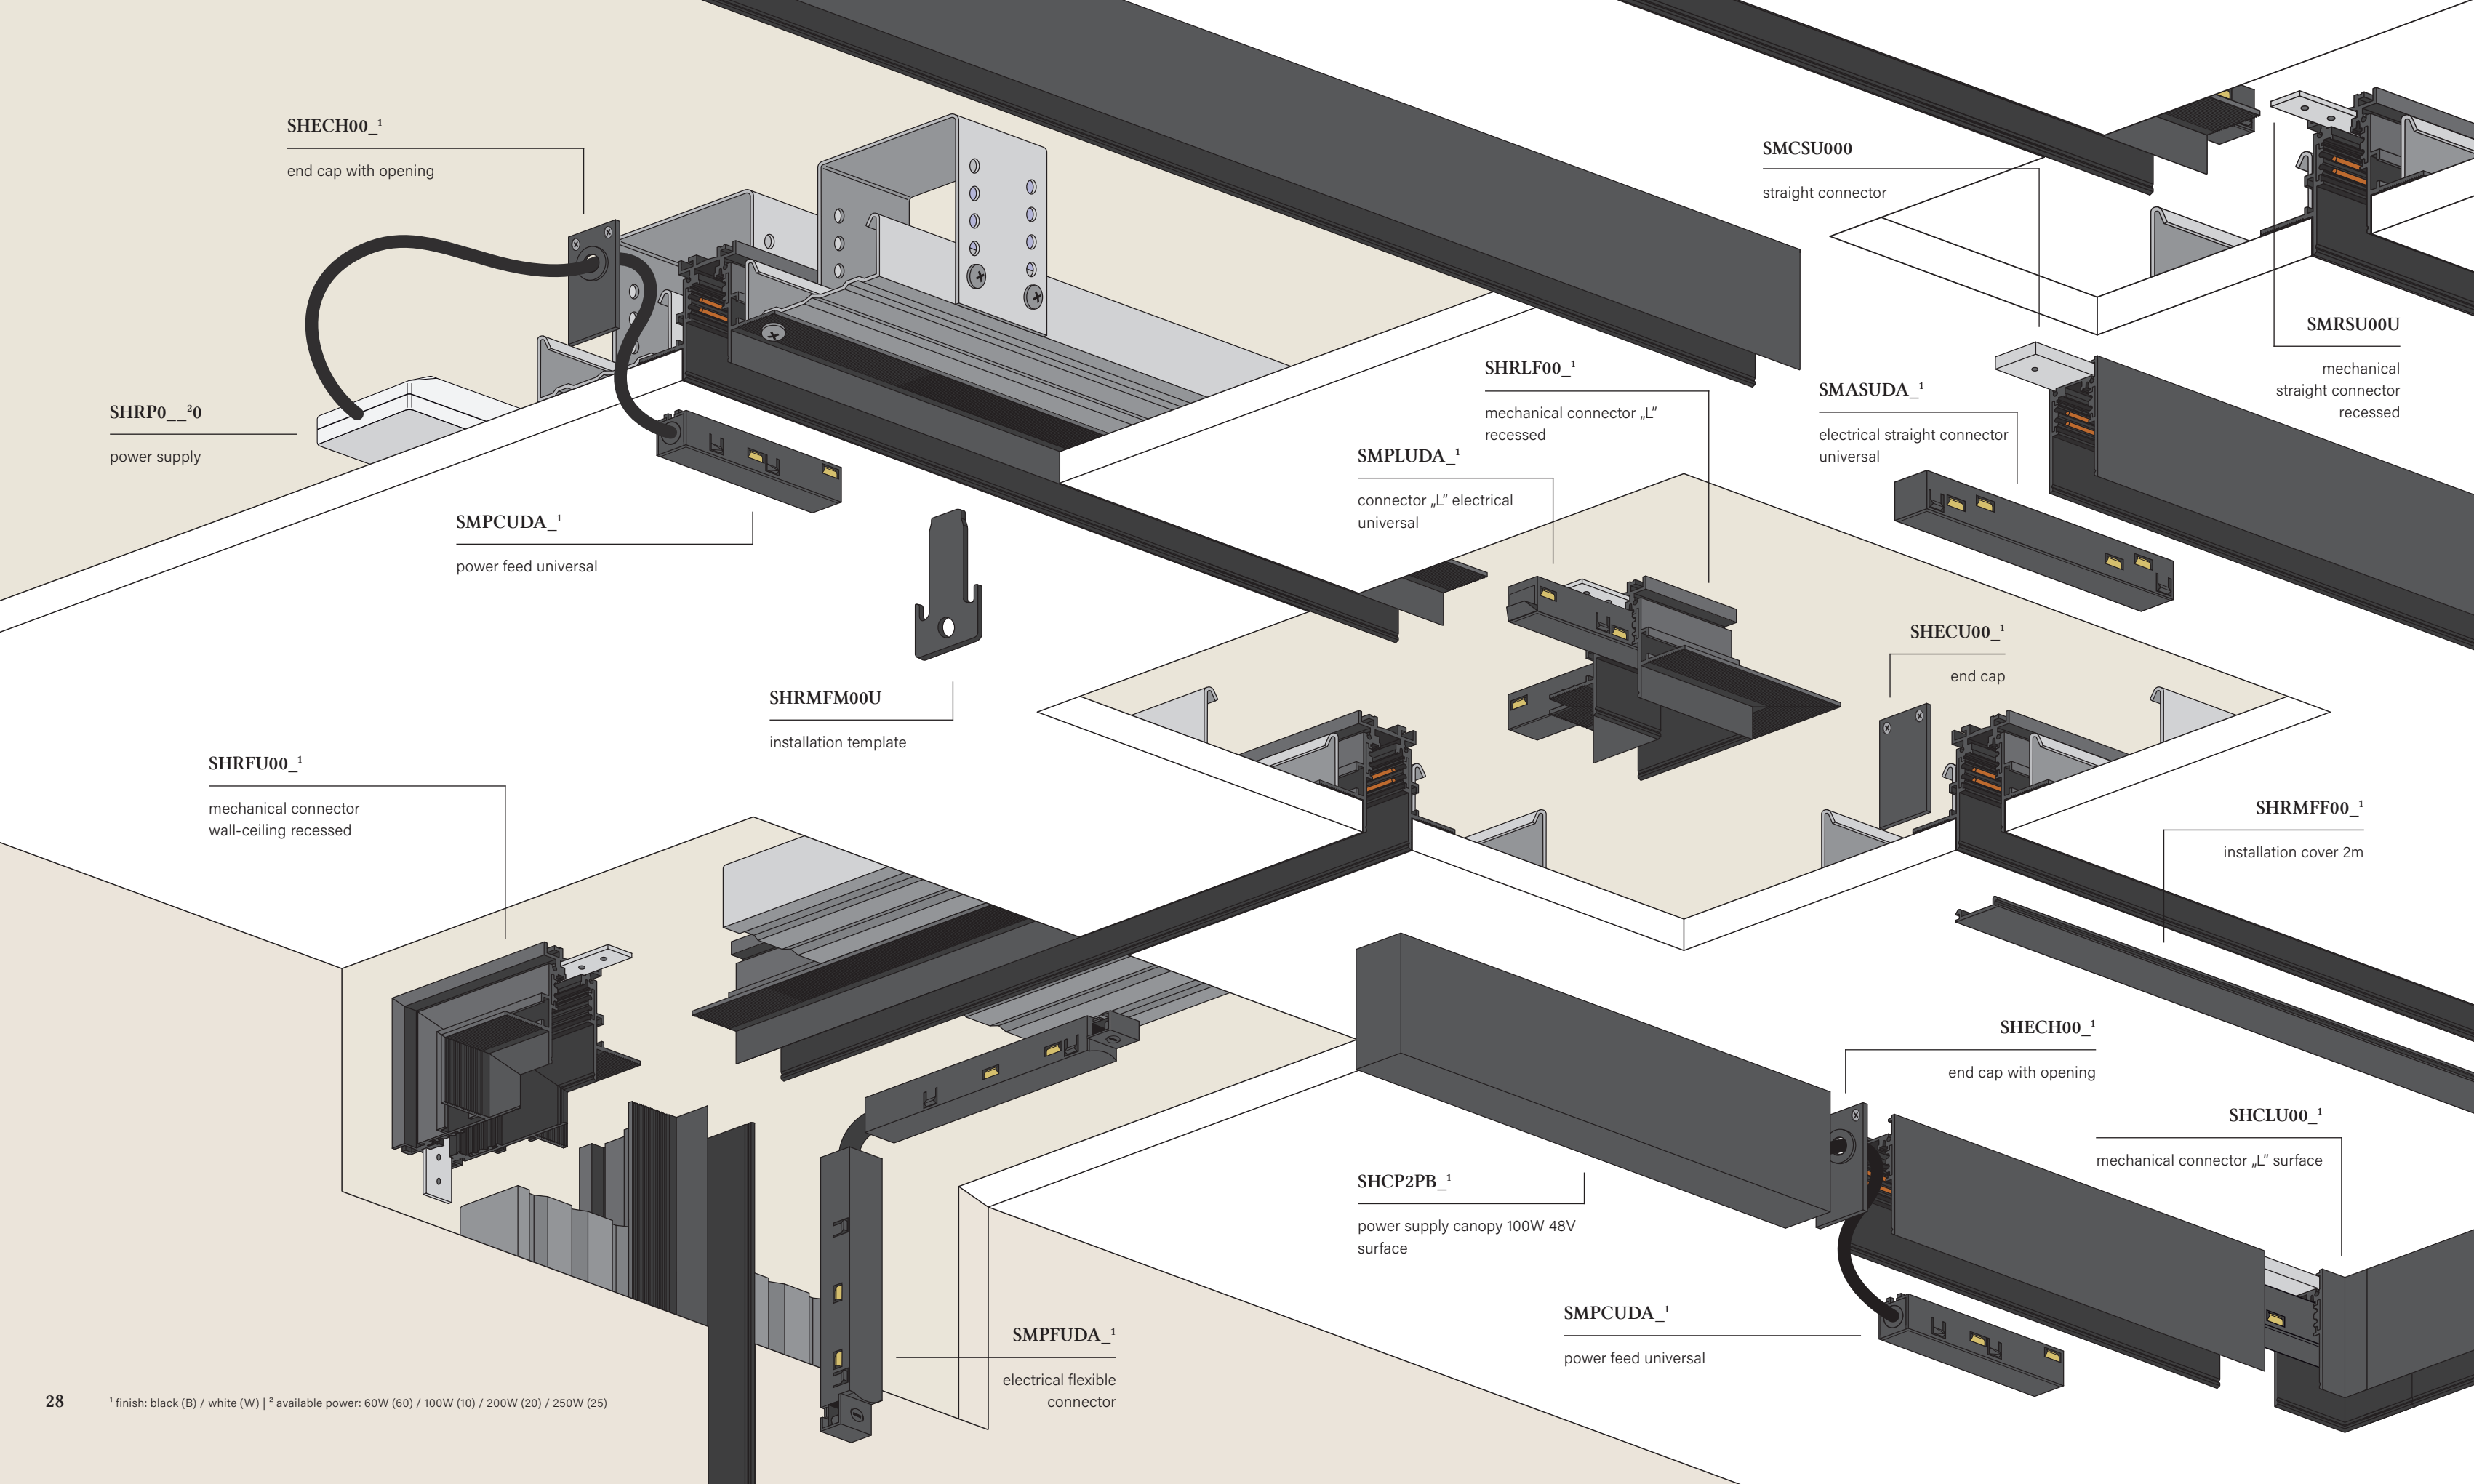

SHECH00\_1

end cap with opening

SMCSU000

straight connector

SMRSU00U

mechanical  
straight connector  
recessed

SMASUDA\_1

electrical straight connector  
universal

SHRLF00\_1

mechanical connector „L“  
recessed

SMPLUDA\_1

connector „L“ electrical  
universal

SMPCUDA\_1

power feed universal

SHRP0\_\_20

power supply

SHRMFM00U

installation template

SHECU00\_1

end cap

SHRFU00\_1

mechanical connector  
wall-ceiling recessed

SHRMFF00\_1

installation cover 2m

SHECH00\_1

end cap with opening

SHCP2PB\_1

power supply canopy 100W 48V  
surface

SHCLU00\_1

mechanical connector „L“ surface

SMPCUDA\_1

power feed universal


SMPFUDA\_1

electrical flexible  
connector




Example of connecting tracks

SMRM\_4 DA\_1 recessed track


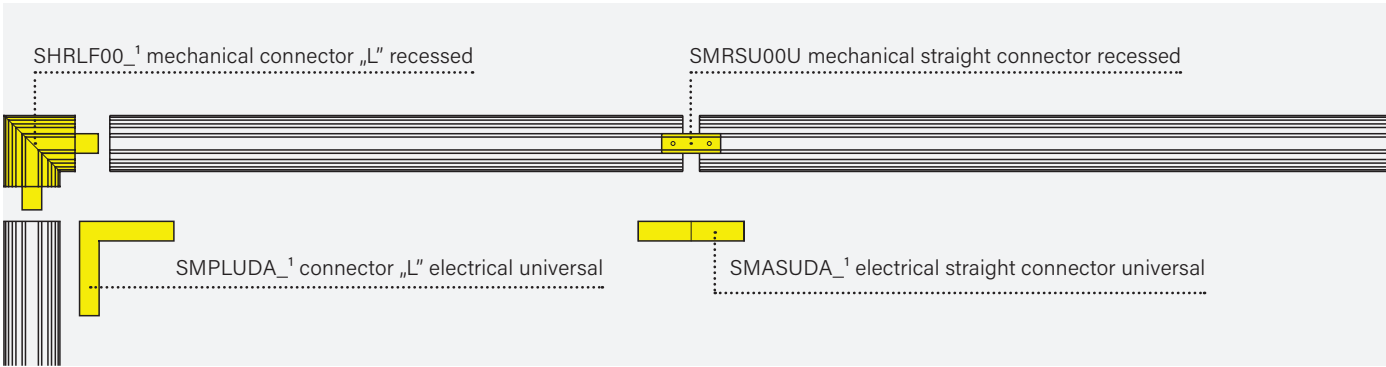


SMCM\_4 DA\_1 surface track | SMSM\_4 DA\_1 suspended track


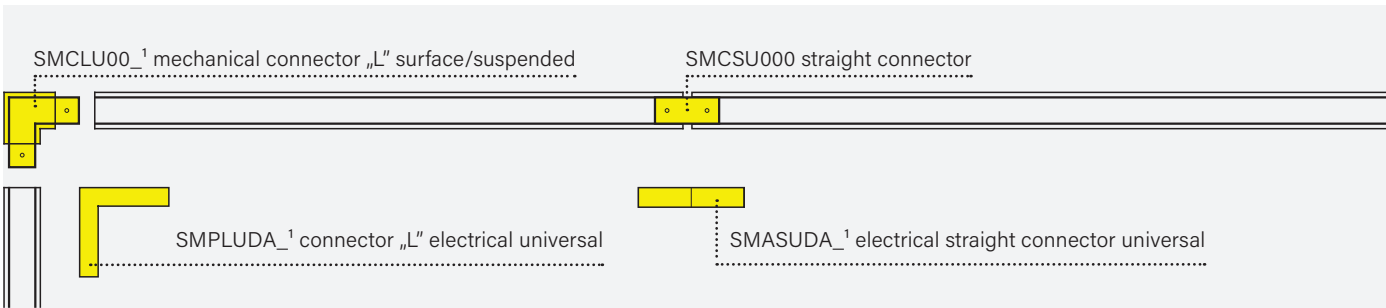


Examples of connecting ceiling-wall transitions



multitrack surface wall  
multitrack surface ceiling





high multitrack recessed wall  
high multitrack recessed ceiling



high multitrack recessed wall  
multitrack surface ceiling




multitrack surface wall  
high multitrack recessed ceiling




Possibilities of connecting profiles with different types of power supplies


recessed high multitrack track + recessed power supply

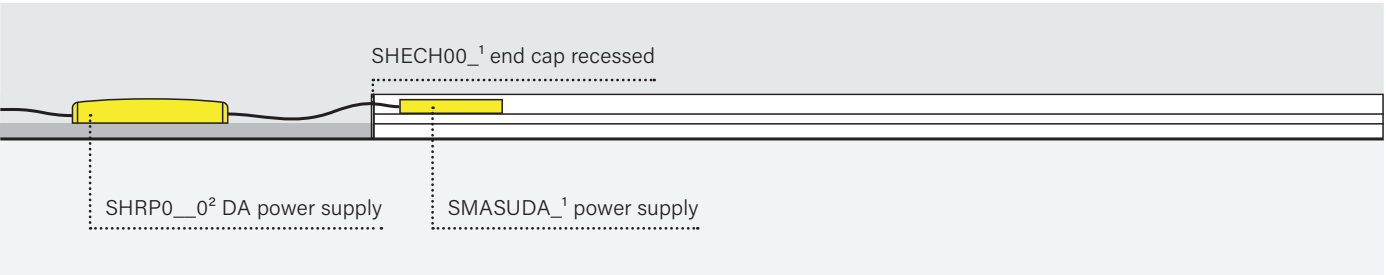


surface multitrack + surface power supply

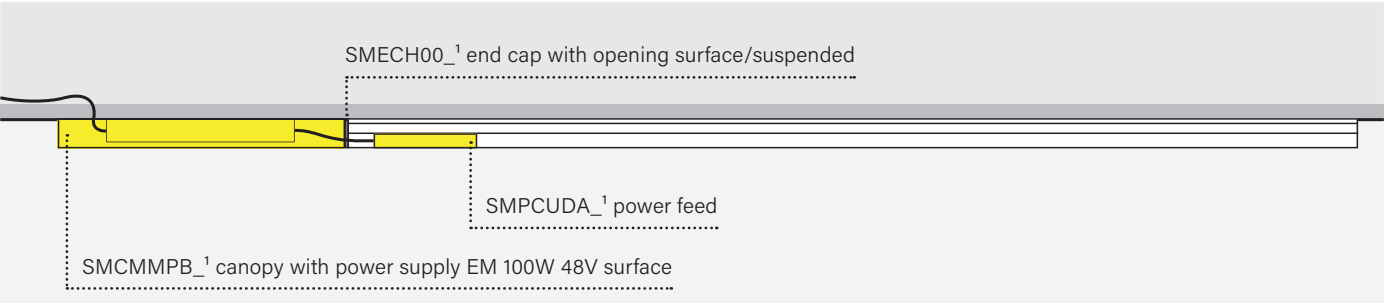


surface multitrack + recessed power supply

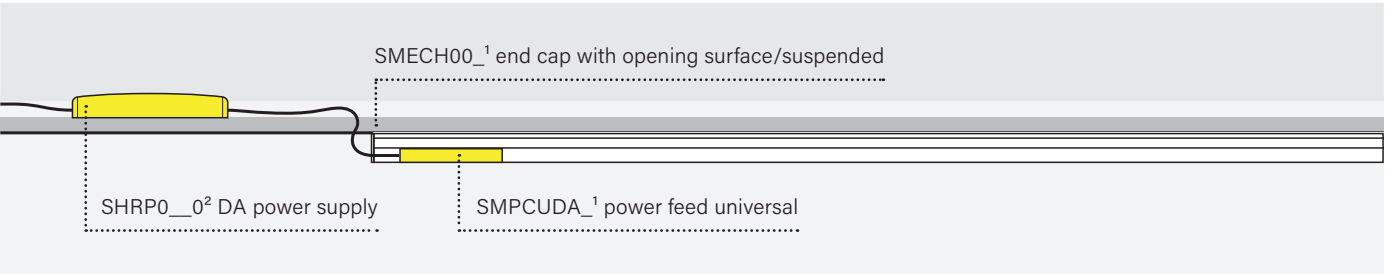

suspended multitrack + recessed power supply

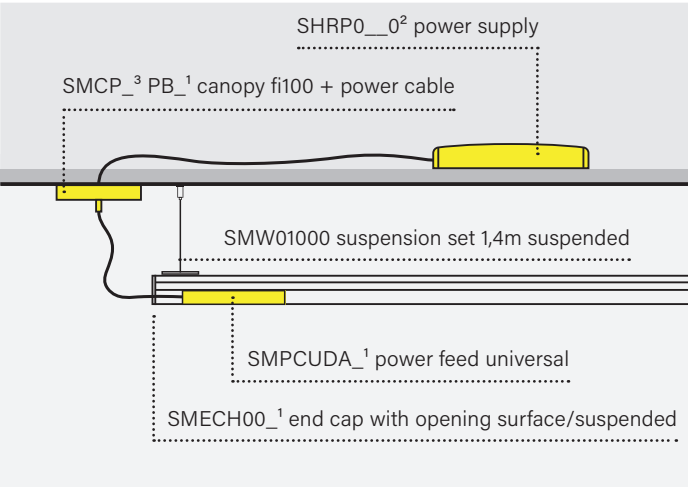

suspended multitrack + surface power supply

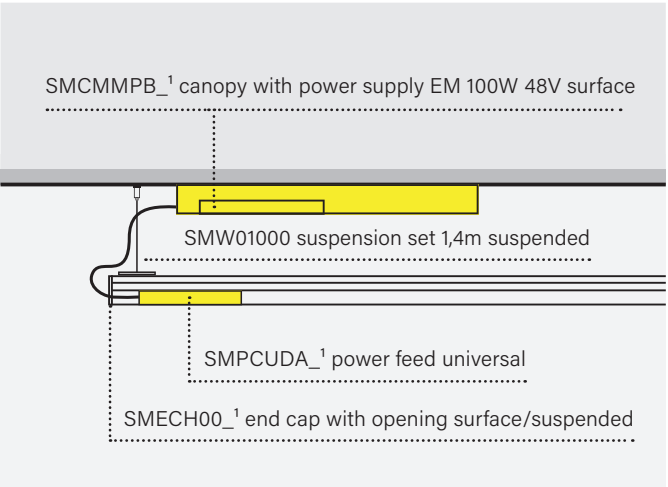



NEW PRODUCT

# Flattrack



## The most subtle track system on the market

Due to its extremely small dimensions, measuring only 6.7mm in height and 18mm in width, the FLATTRACK system is available exclusively in surface-mounted versions. With a safe 48V voltage, it can be confidently installed on walls.

With lengths of tracks reaching up to 3m, a set of accessories and a wide selection of lighting fixtures for the FLATTRACK system, there is flexibility to create diverse arrangements within interiors.

Copper wires run along the sides of the tracks, graphite-coated, making this system not only exceptionally discreet but also aesthetically pleasing.

PET midi LED flattrack | TUBE stiff LED flattrack












TUBE flex 200 LED flatrack | RAFTER mini 23 LED flatrack

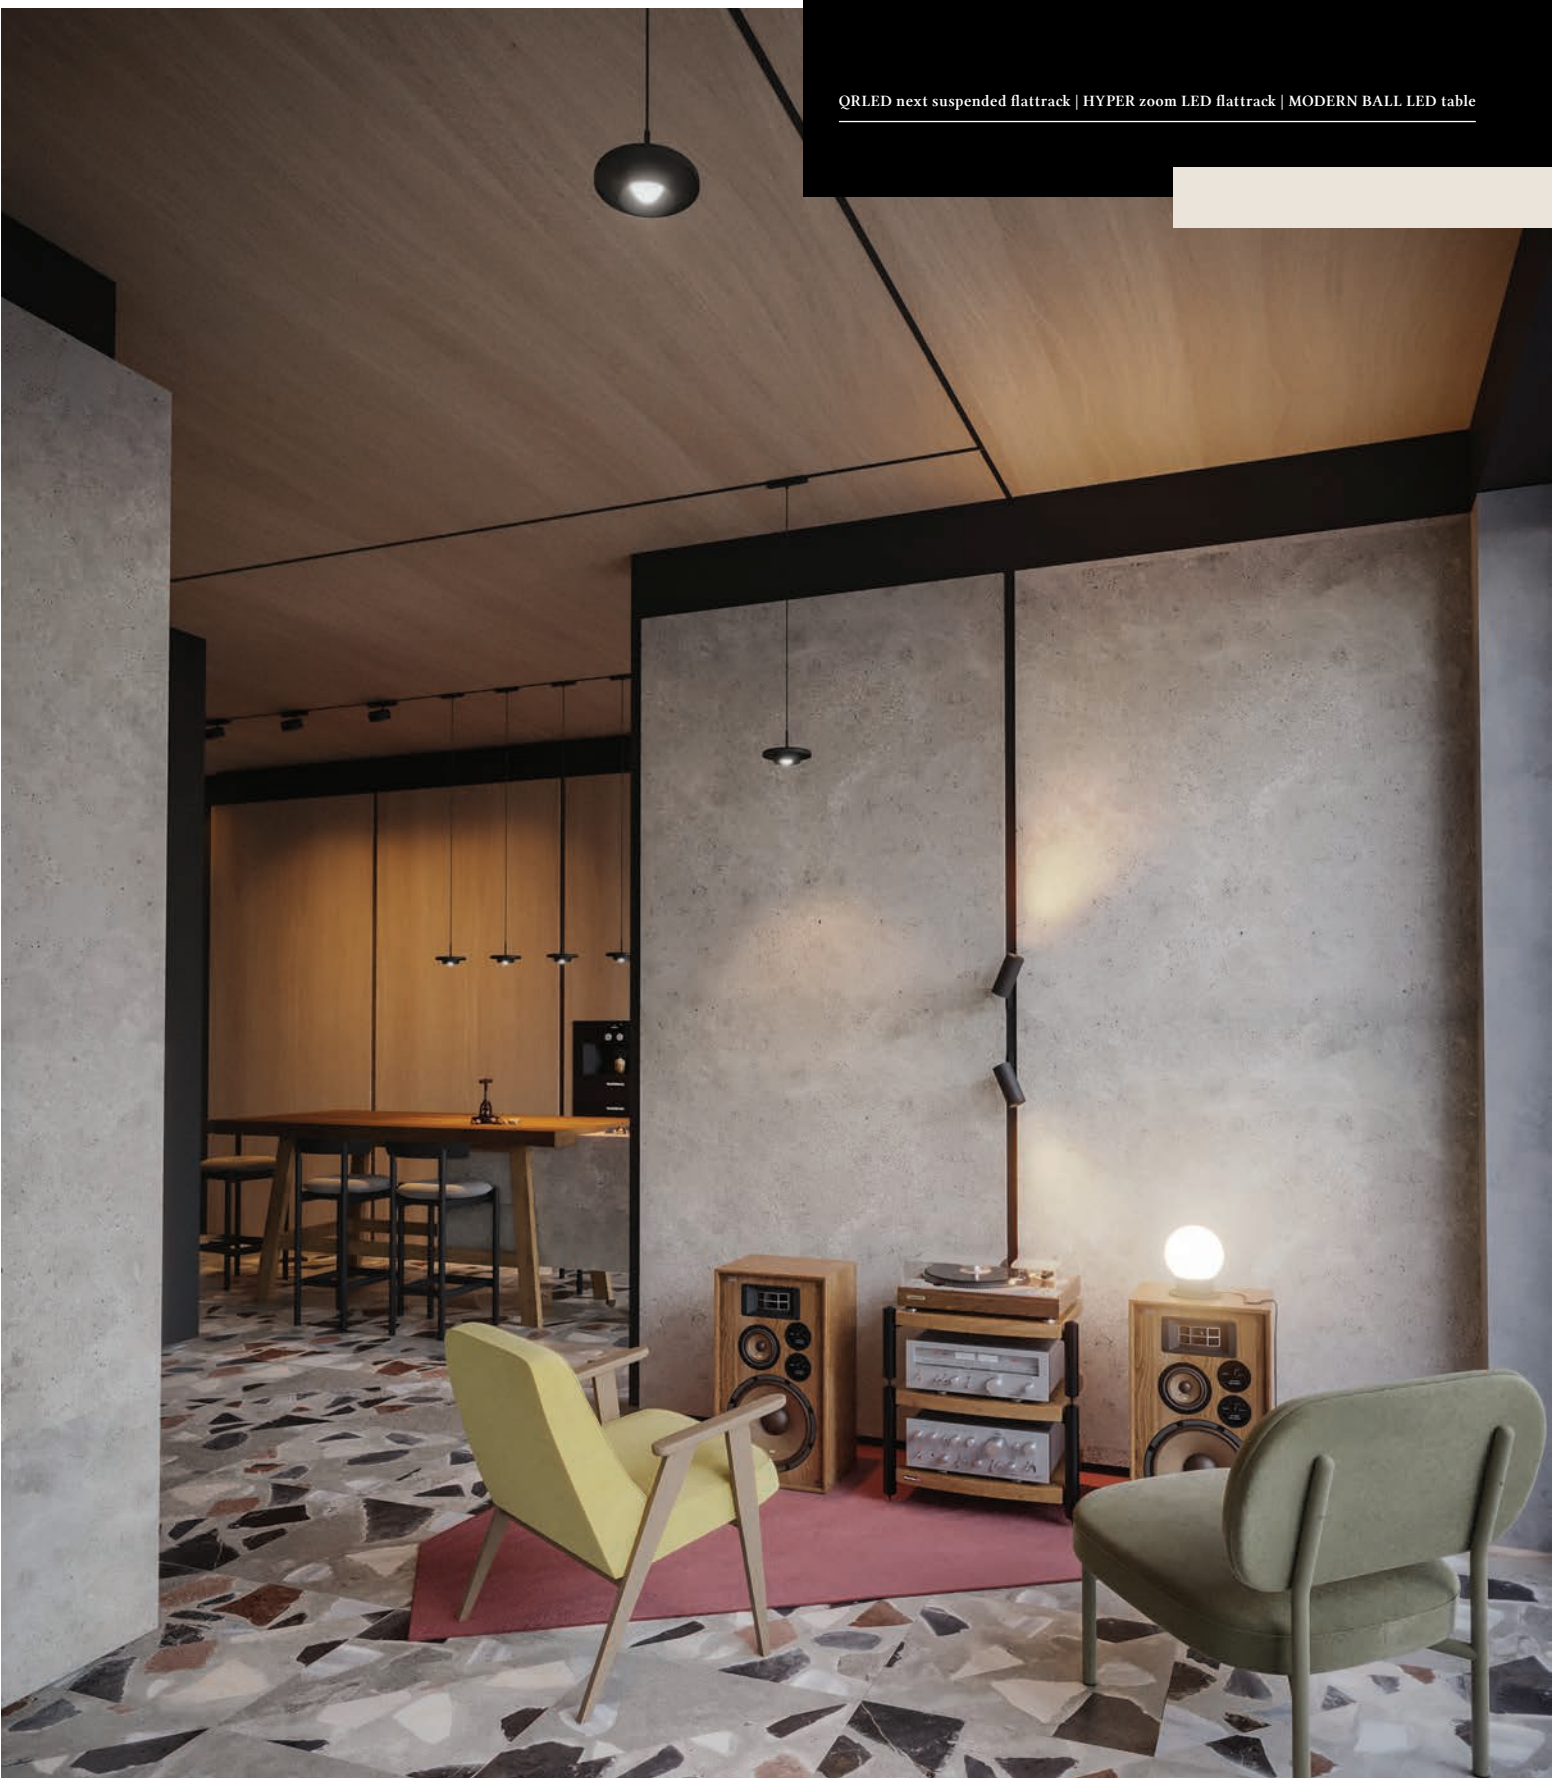

QRLED next suspended flatrack | HYPER zoom LED flatrack | MODERN BALL LED table




# FLATTRACK


Flattrack is our lowest 48V track system. The low voltage allows for great flexibility of application - even within arm's reach. At the same time, the compact dimensions of the flattrack are the solution where we don't want a protruding cable track system, but it cannot be recessed into the ceiling. The entire system is easy to install and, most importantly, ready to be equipped with a wide range of dedicated lighting fixtures.

48V | max 3 metres in one piece | ON-OFF  
Extremely thin | can be safely installed on walls  
Requires 48V power supply | DALI version coming soon

Best for homes, restaurants, small expositions

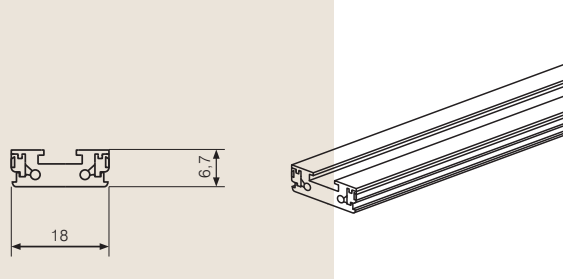

tracks	colour	cat. no
surface 1000mm	black	SFCM100B
	white	SFCM100W
surface 2000mm	black	SFCM200B
	white	SFCM200W
surface 3000mm	black	SFCM300B
	white	SFCM300W

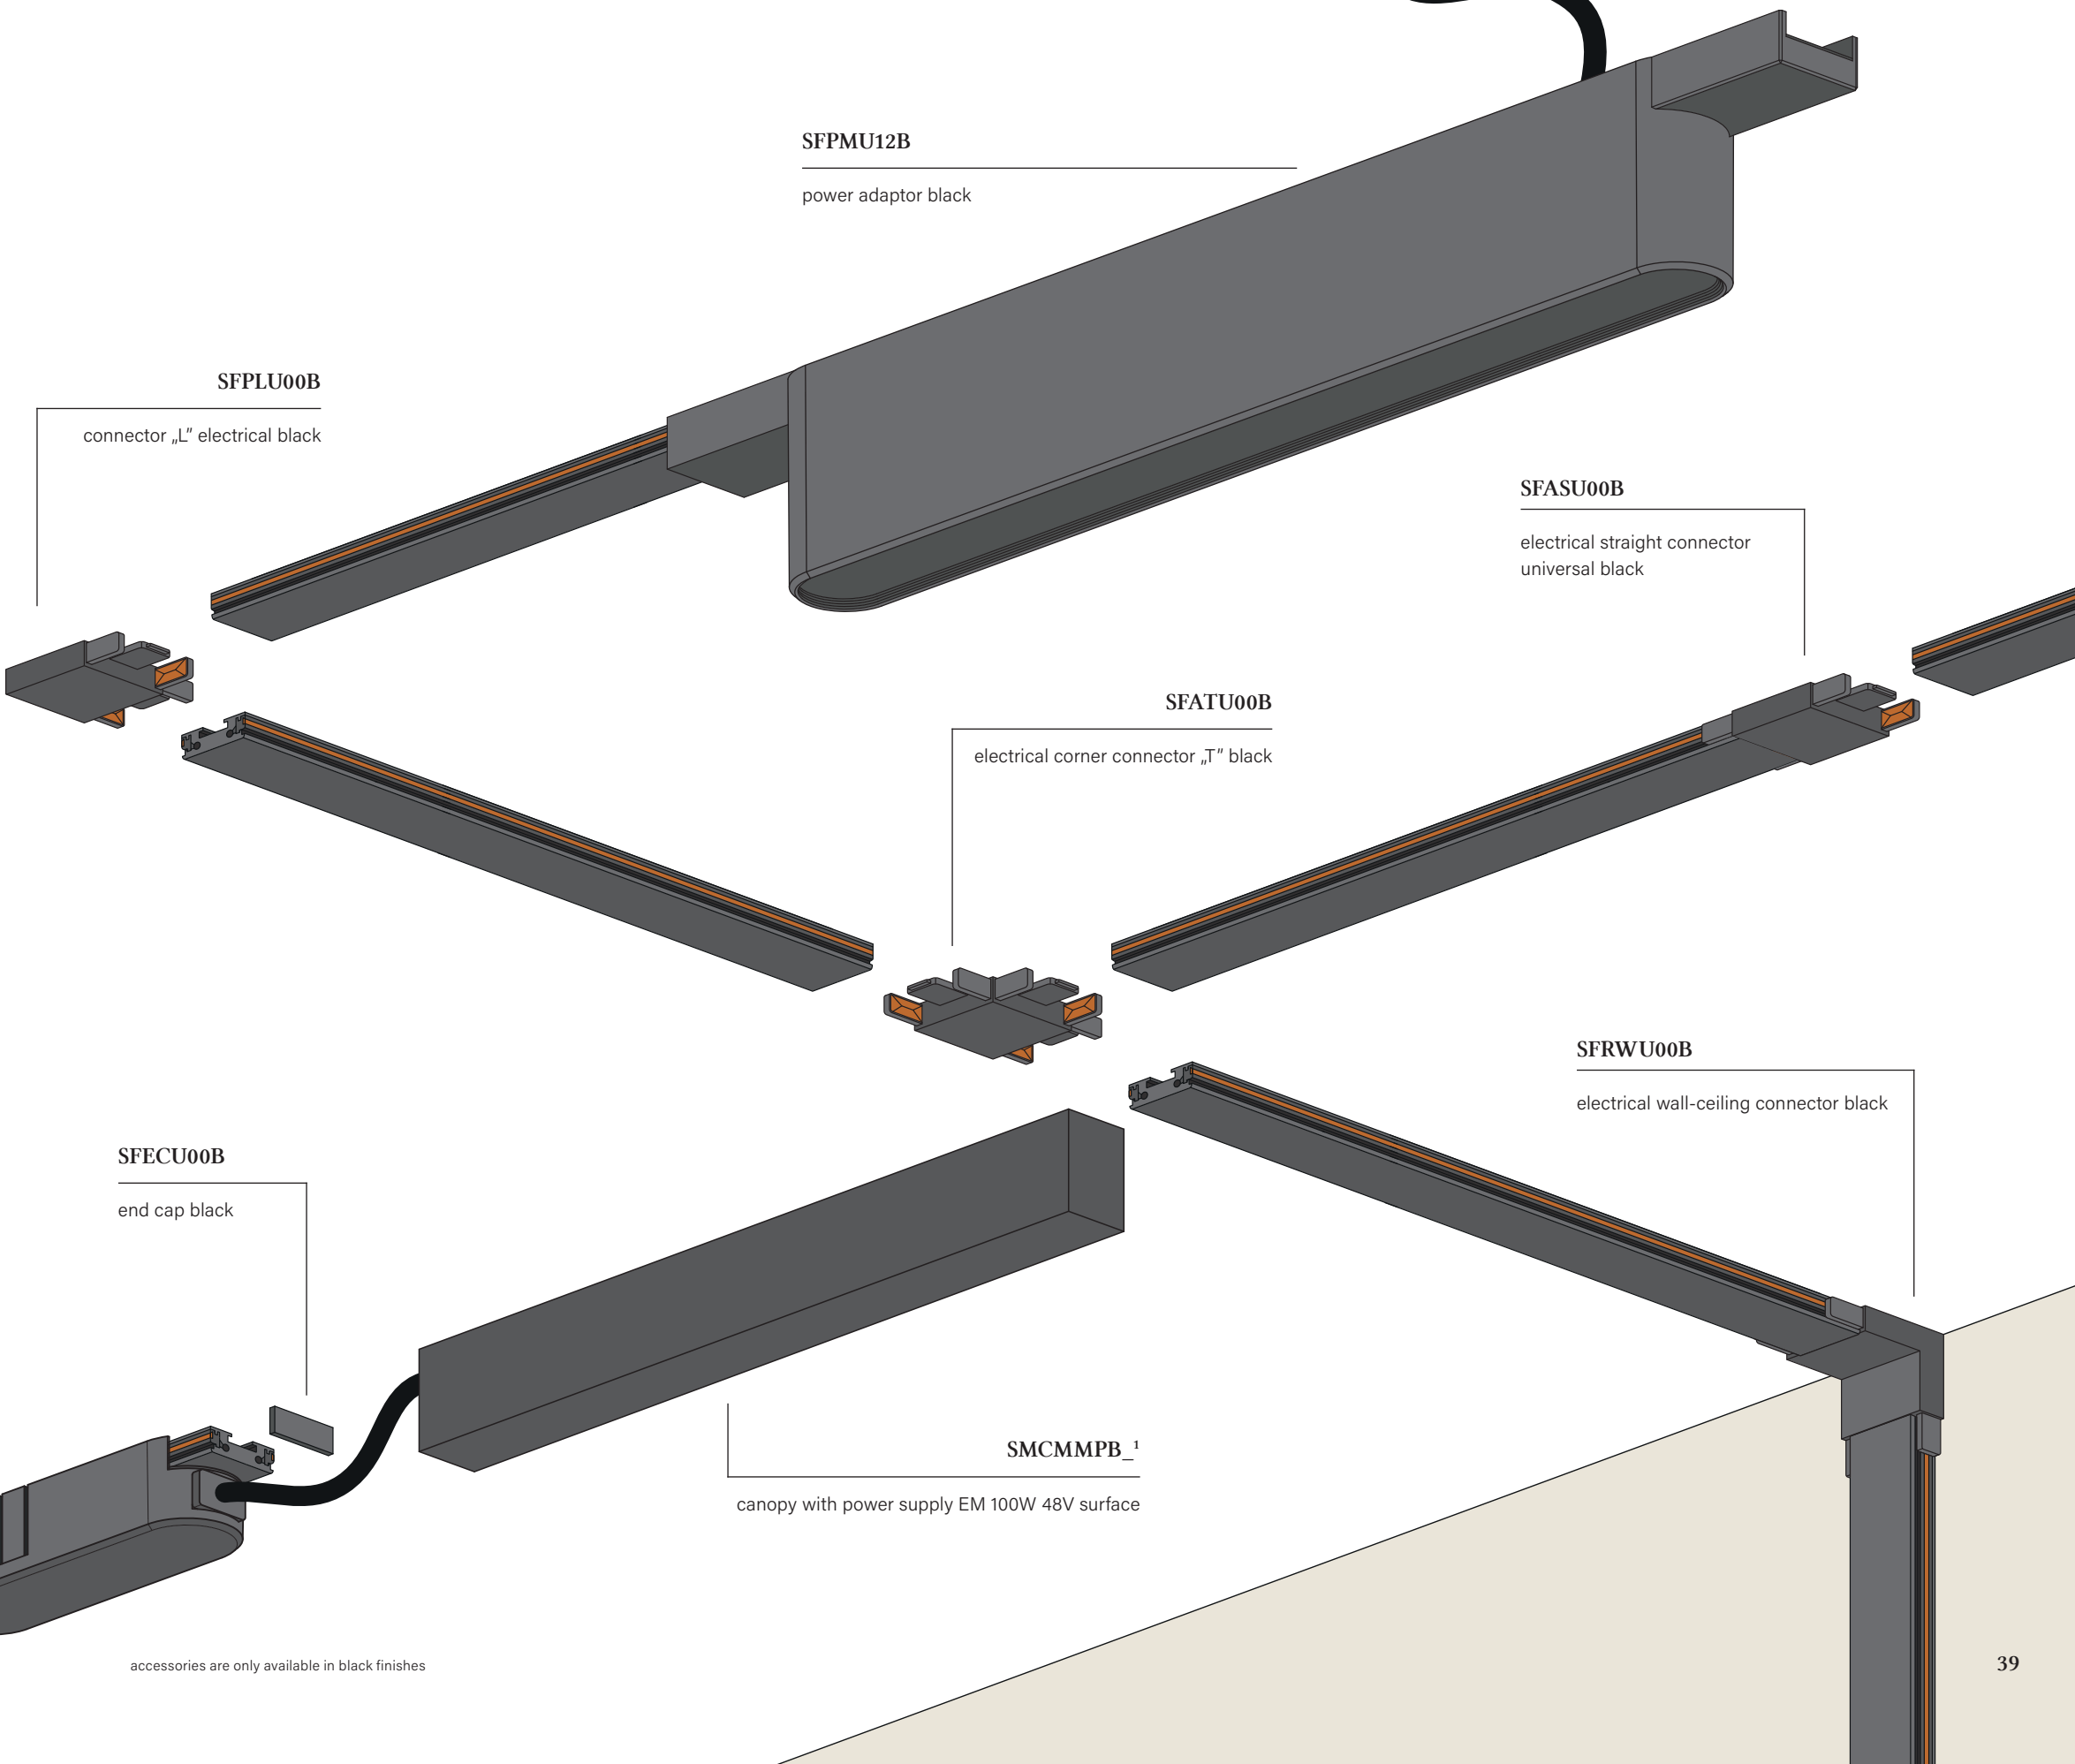

SFPMU12B

power adaptor black

SFPLU00B

connector „L“ electrical black

SFASU00B

electrical straight connector  
universal black

SFATU00B

electrical corner connector „T“ black

SFECU00B

end cap black

SFRWU00B

electrical wall-ceiling connector black

SFPCU00B

power end universal black

SMCMMPB\_1

canopy with power supply EM 100W 48V surface

accessories are only available in black finishes



# Microtrack


NEW PRODUCT

## Exceptionally discreet form with numerous possibilities

The track systems of the MICROTRACK are available in both recessed and surface-mounted versions. Their compact dimensions allow for the creation of exceptionally subtle compositions on the walls and ceilings.

Lighting fixture adapters are inserted into the middle of the track, seamlessly integrating with the discreet line of the tracks themselves. A complete set of accessories and a wide selection of fixtures provide ample creative freedom.

Safe 48V voltage allows for convenient installation within reach. It requires the use of a separate power supply, available in various versions - with a surface-mounted box for installation in a suspended ceiling, as well as for installation in a distribution box.

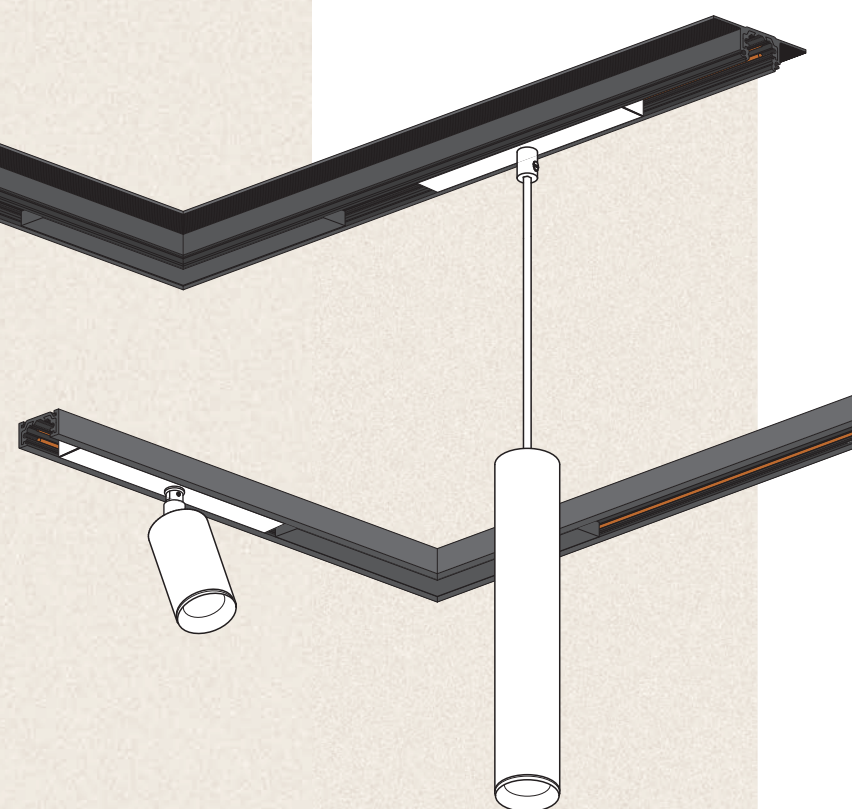

PET mini LED microtrack | MODERN BALL simple mini LED microtrack



All the tracks in this interior have been supplied with 48V power. If there is a 230V power supply in the interior, it is necessary to add power box with opening for cable 100W 48V surface black (SOCP2PBB)





PET mini LED microtrack | MODERN BALL simple mini LED microtrack

All the tracks in this interior have been supplied with 48V power. If there is a 230V power supply in the interior, it is necessary to add power box with opening for cable 100W 48V surface black (SOCP2PBB)



PET mini LED microtrack | MODERN BALL simple mini LED microtrack

All the tracks in this interior have been supplied with 48V power. If there is a 230V power supply in the interior, it is necessary to add power box with opening for cable 100W 48V surface black (SOCP2PBB)







# MICROTRACK

## The minimalist track with low voltage

MICROTRACK inner width is less than 12mm high, it uses a safe voltage of 48V and offers many accessories to choose from.


In the case of MICROTRACK, the same system components are compatible for both ON/OFF and DALI installations.

48V | max 2 metres in one piece | ON-OFF | DALI  
Extremally thin | can be safely installed on walls  
Requires 48V power supply




tracks	colour	cat. no	tracks	colour	cat. no
surface 1000mm	black	SOCM1DAB	recessed 1000mm	black	SORM1DAB
surface 2000mm	black	SOCM2DAB	recessed 2000mm	black	SORM2DAB

## Maximum load

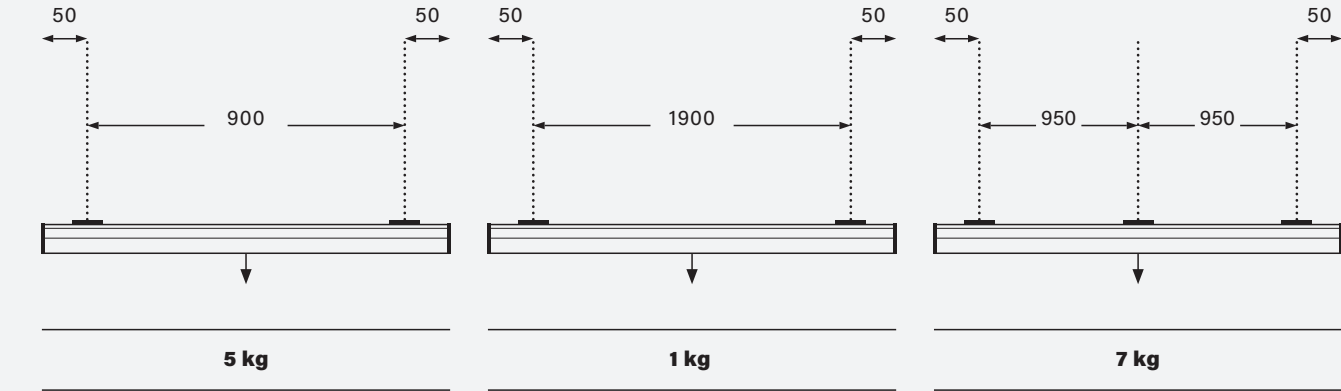



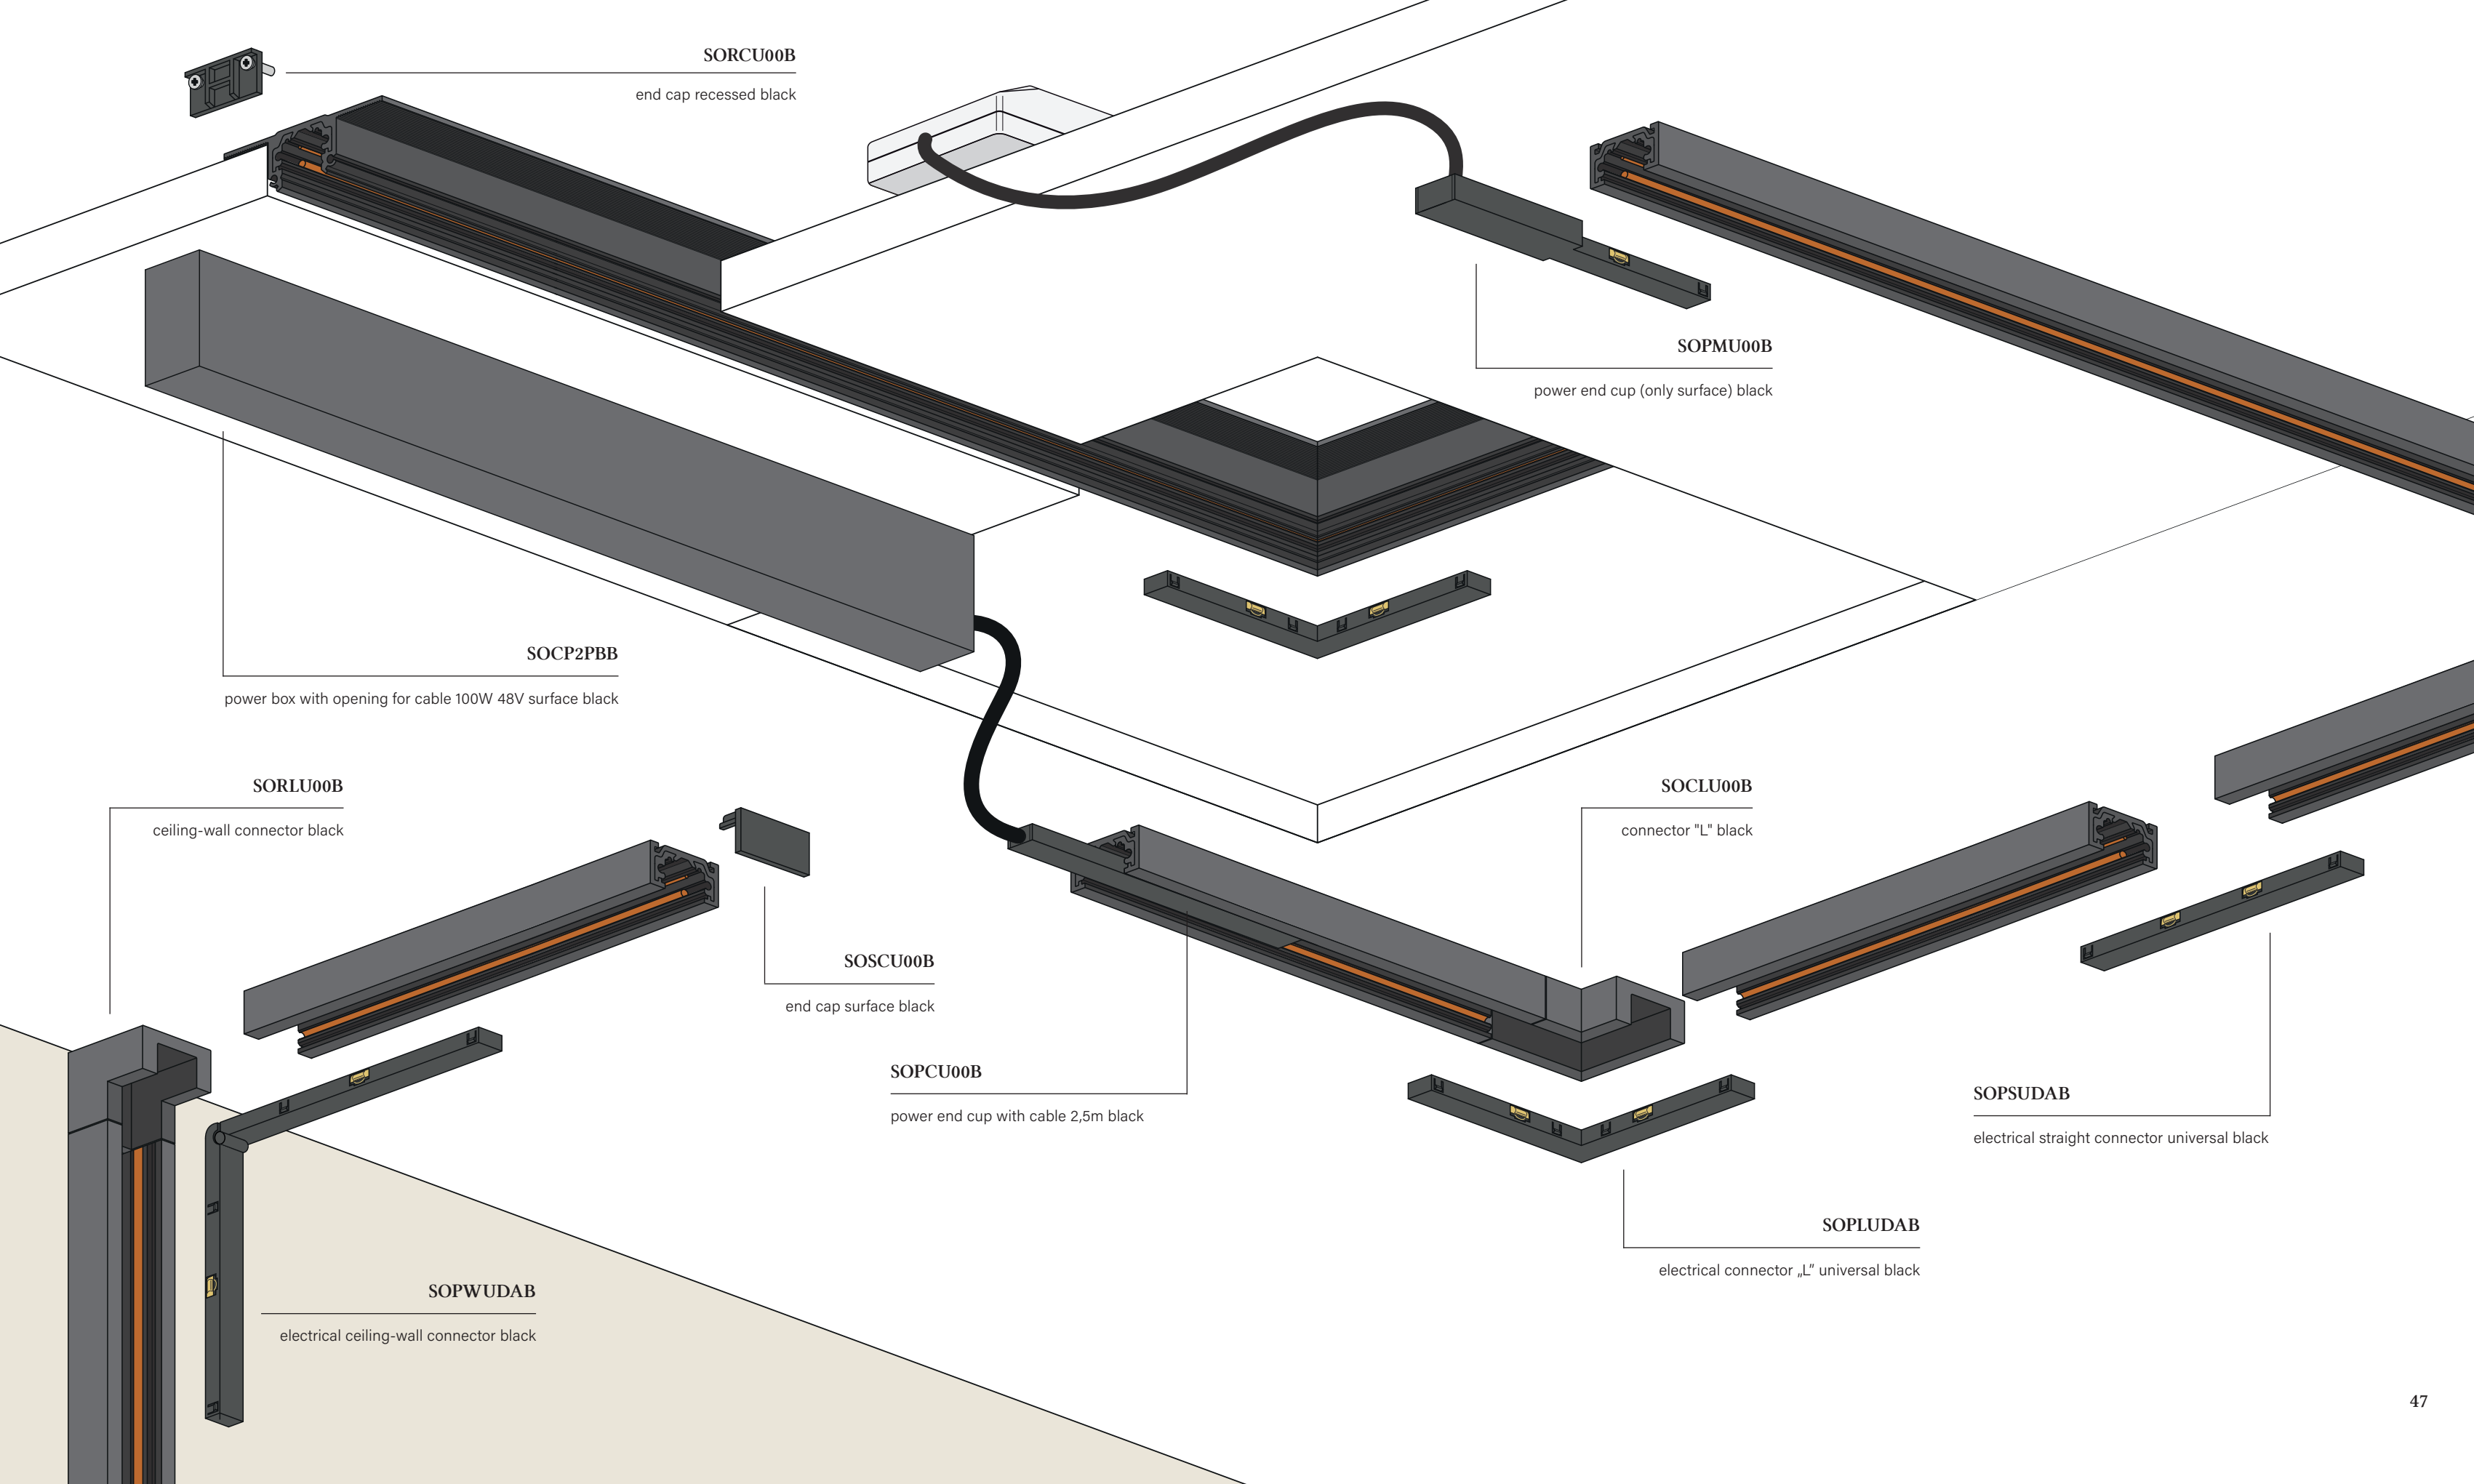

SORCU00B

end cap recessed black

SOPMU00B

power end cup (only surface) black

SOC2PBB

power box with opening for cable 100W 48V surface black

SORLU00B

ceiling-wall connector black

SOSCU00B

end cap surface black

SOPCU00B

power end cup with cable 2,5m black

SOCLU00B

connector "L" black

SOPSUDAB

electrical straight connector universal black

SOPLUDAB


electrical connector „L“ universal black

SOPWUDAB

electrical ceiling-wall connector black



# Track 3F & Dali

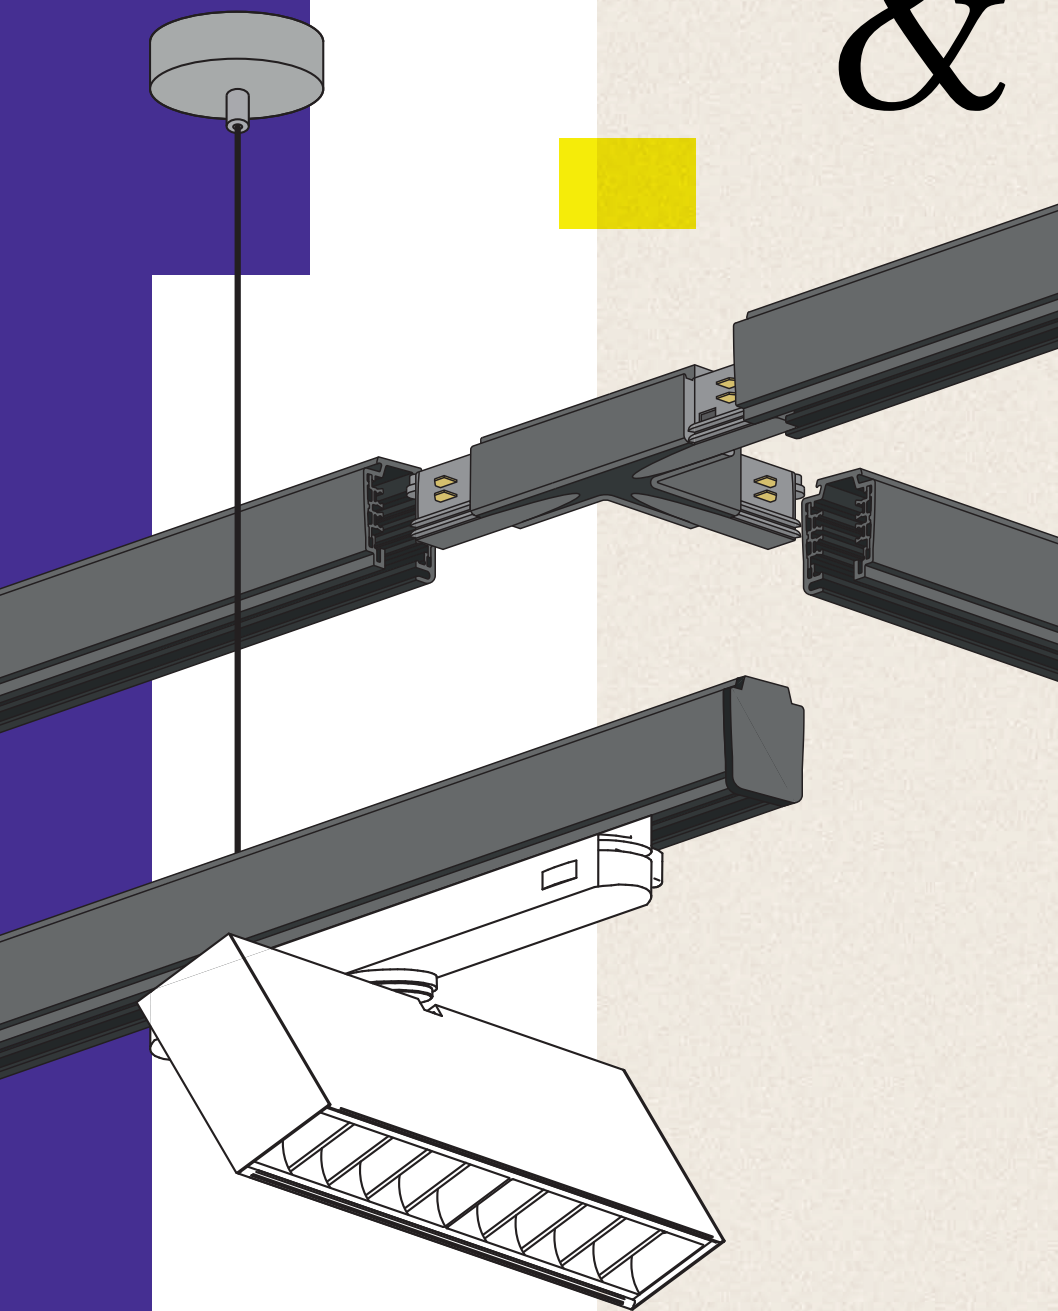

## 3F tracks combine flexibility, minimalistic design and affordable price

They are powered by 230V, so to connect them, all you need is a standard cable on the ceiling and a power terminal or one of the connectors with the possibility of connecting the power supply (straight connector, "L", "T" or "X").

They make it possible to divide lighting fixtures into up to three circuits so that they work independently. This requires a 5-wire cable between the wall switches and the track connection.

They are made of aluminum profile painted black (RAL 9005) or white (RAL 9003).

## Standard tracks for demanding interiors

The DALI version of the 3F tracks is intended for interiors where a wired digital control system based on the DALI protocol is used. This solution allows for independent addressing of the luminaires. In other words, it is possible to program light scenes, dim luminaires and combine them into groups.

The 3F DALI tracks requires the use of fixtures in the DALI control version, as well as appropriate installation and the use of properly selected automation.







ARANŻACJE NA MIARĘ



















# 3F TRACK

With the use of track systems, one can easily change the number, location and even the type of luminaires installed indoors. It is possible to adjust the interior lighting without making additional changes to the ceiling structure or electrical installation. Track systems are made of aluminum profiles varnished in selected colours. The inside copper wires are placed in a guideway made of self-extinguishing polycarbonate, which also insulates the wires from the aluminium body. Fire resistance class – V0.

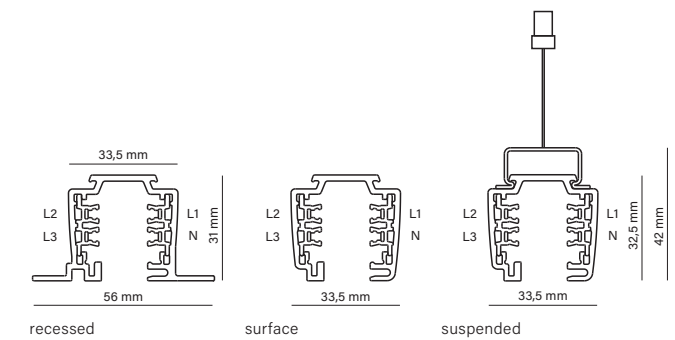

The track can be cut to given dimensions at the installation site. The cut surface or copper line of standard 3F tracks does not require bending or any other special treatment after the cut. Copper lines of the 3F DALI track need to be trimmed after the cut.

230V | max 3 metres in one piece | ON-OFF (three circuits) | DALI

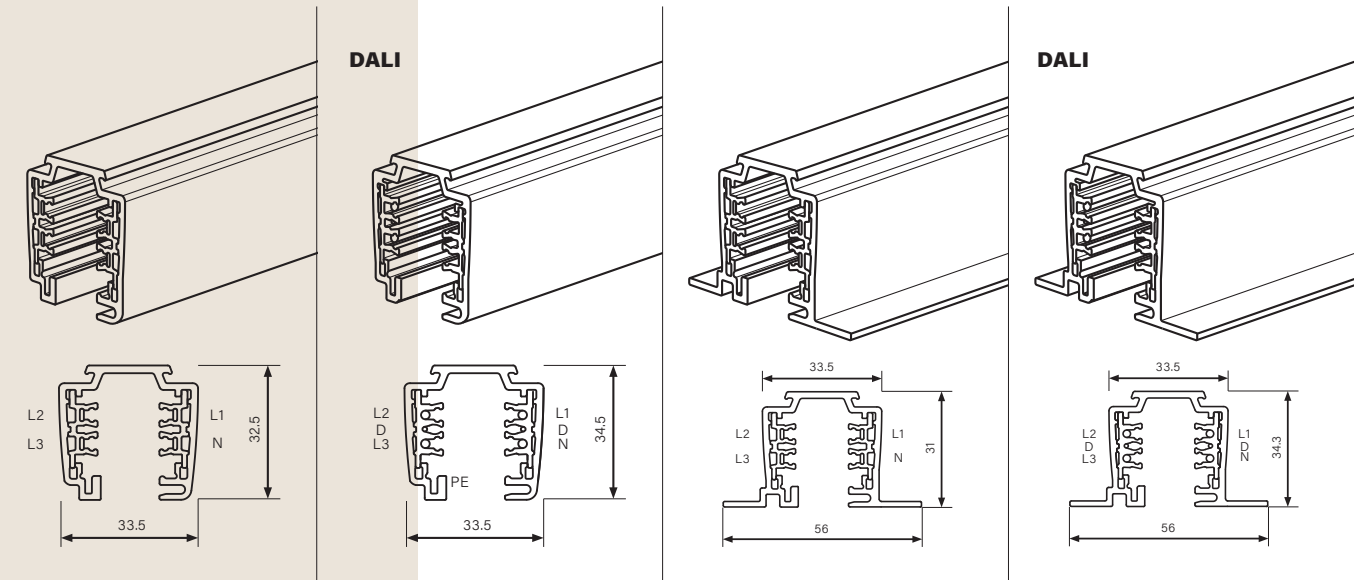


tracks	colour	cat. no
surface/suspended 1000mm	black	STCH1PHB
	white	STCH1PHW
surface/suspended 2000mm	black	STCH2PHB
	white	STCH2PHW
surface/suspended 3000mm	black	STCH3PHB
	white	STCH3PHW
DALI surface/suspended 2000mm	black	STCH2DAB
	white	STCH2DAW
DALI surface/suspended 3000mm	black	STCH3DAB
	white	STCH3DAW

tracks	colour	cat. no
recessed 1000mm	black	STRH1PHB
	white	STRH1PHW
recessed 2000mm	black	STRH2PHB
	white	STRH2PHW
recessed 3000mm	black	STRH3PHB
	white	STRH3PHW
DALI recessed 2000mm	black	STRH2DAB
	white	STRH2DAW
DALI recessed 3000mm	black	STRH3DAB
	white	STRH3DAW

BLOS round LED track | CONA 52 E27 suspended





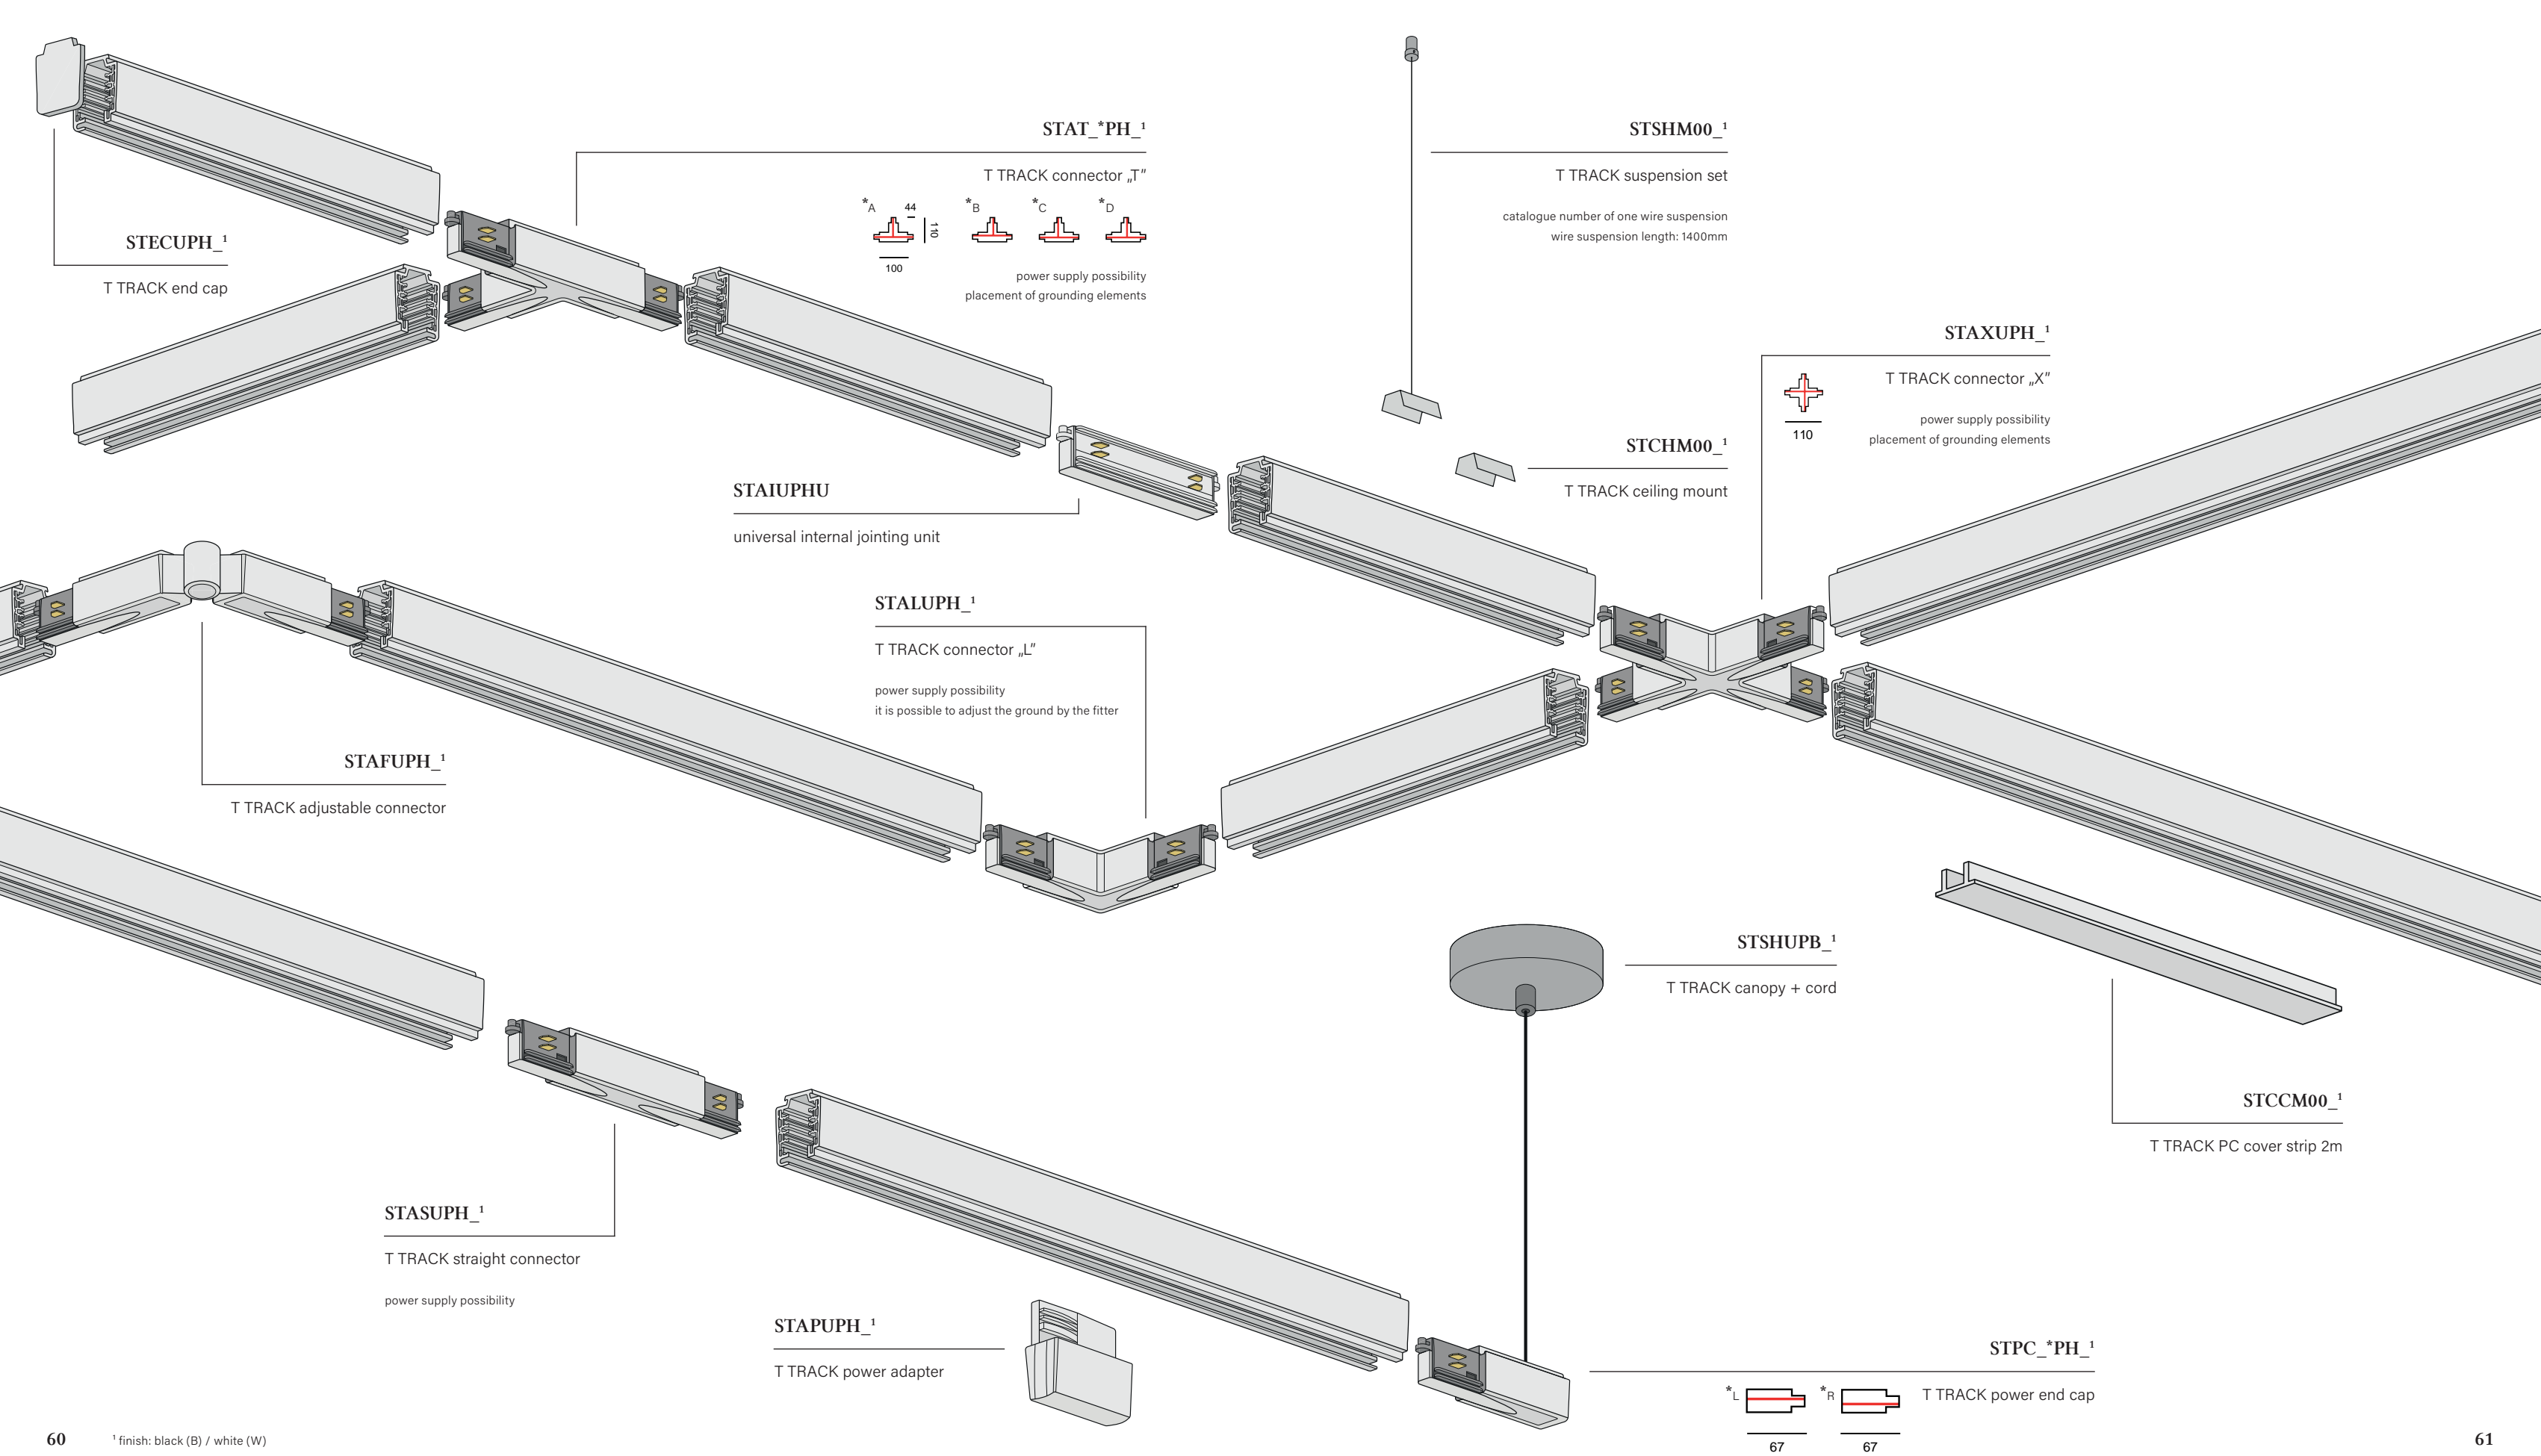



# Lighting fixtures

OPRAWNY



MULTITRACK

HYPER

MODERN BALL simple

PET midi

PET mini

QRLED next



new

HIGH MULTITRACK






HYPER

MODERN BALL simple

PET midi

PET mini

QRLED next



new

FLATTRACK






HYPER

MODERN BALL simple

PET mini

QRLED next

RAFTER



new

new

new

new

new





MICROTRACK

MODERN BALL simple

PET mini

RAFTER mini points

RAFTER points



TRACK


BLOS round

HYPER

MODERN BALL simple

PET mini

PET midi








RAFTER

RAFTER mini

SET TRU mini

SET TRU mini points

TRIBA mini







new

RAFTER

RAFTER mini

RAFTER points

TRIBA mini

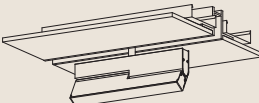




new

RAFTER mini

TUBE flex

TUBE stiff



new

new

new






PET maxi

QRLED next

RAFTER

SET TRU

TRIBA midi



new

new



NEW PRODUCT


# Qrled next

Next is a new version of the popular family of luminaires

Small size, high light parameters and high light efficiency make QRLED an extremely aesthetic and effective way to provide a well-lit interior.

## QRLED next

flatrack | suspended flatrack | suspended multitrack



new

CAT. N°

16496-M930-W3-00-12

POWER:

6W (L) | 8.5W (M)

FLUX:

790lm - 1090lm

OPTICS:


52° (W\_)

CCT:

2700K (27) | 3000K (30) | 4000K (40)

CONTROL:

ON/OFF (00)



new

CAT. N°

16497-M930-W3-00-12

POWER:

6W (L) | 8.5W (M)

FLUX:

790lm - 1090lm

OPTICS:


52° (W\_)

CCT:

2700K (27) | 3000K (30) | 4000K (40)

CONTROL:

ON/OFF (00)



new

CAT. N°

16485-M930-W3-00-12

POWER:

6W (L) | 8.5W (M)

FLUX:

790lm - 1090lm

OPTICS:

52° (W\_)

CCT:

2700K (27) | 3000K (30) | 4000K (40)


CONTROL:

ON/OFF (00) | DALI (DA)



## QRLED next

track | high multitrack | multitrack



new

CAT. N°

16486-M930-W3-00-12

POWER:

6W (L) | 8.5W (M)

FLUX:

790lm - 1090lm

OPTICS:


52° (W\_)

CCT:

2700K (27) | 3000K (30) | 4000K (40)

CONTROL:

ON/OFF (00) | DALI (DA)



new

CAT. N°

16483-M930-W3-00-12

POWER:

6W (L) | 8.5W (M)

FLUX:

790lm - 1090lm

OPTICS:


52° (W\_)

CCT:

2700K (27) | 3000K (30) | 4000K (40)

CONTROL:

ON/OFF (00) | DALI (DA) | ON/OFF second circuit (01)



new

CAT. N°

16484-M930-W3-00-12

POWER:

6W (L) | 8.5W (M)

FLUX:

790lm - 1090lm

OPTICS:

52° (W\_)

CCT:

2700K (27) | 3000K (30) | 4000K (40)

CONTROL:

ON/OFF (00) | DALI (DA) | ON/OFF second circuit (01)



see the product online

### LUMINAIRE FINISHES

WHITE -13 ○ GREY -84 ● TAUPE -82 ●  
BLACK -12 ● TERRACOTTA -83 ● GOLD -19 ● MIX -06 ●





Decorative form  
and precise light

TRIBA is precise optics and high quality of light enclosed in a decorative, three dimensional form.

Two diameters, beam angles from 18 to 50°, luminous flux from 510 to 1210lm allow you to easily select the appropriate luminaire model.

High light parameters, including CRI>90 (or even CRI>95 on request) and uniform light colour (SDCM3) will ensure the highest quality lighting. And the expressive, milled shape will add character to the interior. TRIBA attracts attention and shines well.




reddot winner 2024


NEW PRODUCT

Triba

TRIBA mini LED  
multitrack | high multitrack




new

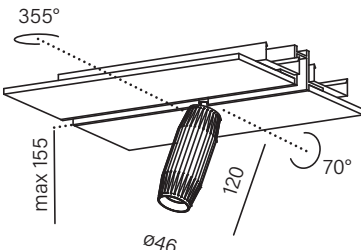

new

TRIBA midi LED  
track

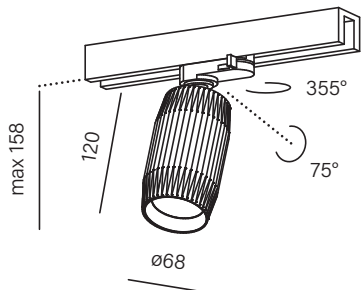


new

CAT. N°		CAT. N°		CAT. N°	
16474-M930-FB-00-12		16475-M930-FB-00-12		16479-M930-FB-00-12	
POWER:		4.5W (M)		8.5W (M)	
FLUX:		540lm		1140lm	
CCT:		20° (F_)   41° (W_)		18° (S_)   35° (F_)   50° (W_)	
OPTICS:		2700K (27)   3000K (30)   4000K (40)			
CONTROL:		ON/OFF (00)   ON/OFF second circuit (01)   DALI (DA)		ON/OFF (00)   Phase-Control (PH) DALI (DA)   AQsmart (DB)	

ACCESSORY

honeycomb



see the product online

RING FINISHES	LUMINAIRE FINISHES
WHITE -_W-	WHITE -13
BLACK -_B-	BLACK -12
GREY -_A-	GREY -84
TERRACOTTA -_R-	TERRACOTTA -83
TAUPE -_T-	TAUPE -82
GOLD -_G-	GOLD -19







A functional way to break  
the monotonny

If you value a touch of individualism  
and general lighting – this fixture is for you.  
The luminous flexible tube not only catches  
the eye but gently illuminates the entire room.  
The option to connect it to one or two track  
systems invites you to play with its inherently  
variable form. Create luminous compositions  
during design or even during installation that  
will add dynamism to the space.

NEW  
PRODUCT

Tube

TUBE flatrack  
flex | stiff

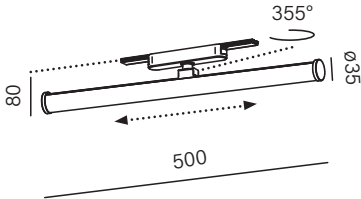

new		new	
LENGTH	CAT. N°	LENGTH	CAT. N°
1000mm	16506-M930-D9-00-12	500mm	16505-M930-D9-00-12
2000mm	16507-M930-D9-00-12		
POWER: 9W - 18W (M)		8.5W (M)	
FLUX: 1280lm - 2560lm		1070lm	
CCT: 2700K (27)   3000K (30)			
CONTROL: ON/OFF (00)			



see the product online

LUMINAIRE FINISHES

- WHITE -13
- BLACK -12





# Pet

## KOMFORT

**Delicate form and good light**

The PET mini model provides a sufficiently large luminous flux to highlight the most interesting elements in the interior. Carefully designed optics of PET luminaires as well as appropriately selected light parameters allow for low glare in the interior and high visual comfort.





Thanks to high levels of luminous flux and various beam angles, PET luminaires are perfect for many applications: in homes, shops and public spaces. They can be equipped with optional accessory – a honeycomb. PET frames are available in many colour versions, including mixed versions in which the decorative ring is a different colour than the body. For supporters of more classical solutions, we have a version with a traditional light source with an equally minimalistic design.

## ŚWIECENIA





PET mini

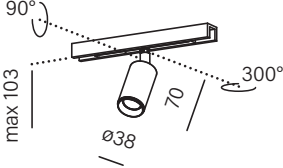microtrack | suspended microtrack | flattrack | suspended flattrack







new



new

CAT. N°	CAT. N°	CAT. N°	CAT. N°
16436-M930-FB-00-12	16434-M930-FB-00-12	16495-M930-FB-00-12	16494-M930-FB-00-12
POWER: 4.5W (M)			
FLUX: 540lm			
OPTICS: 20° (F_)   41° (W_)			
CCT: 2700K (27)   3000K (30)   4000K (40)			
CONTROL: ON/OFF (00)   DALI (DA)		ON/OFF (00)	
			

PET mini

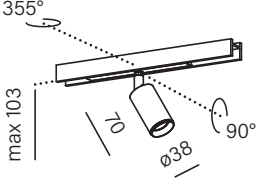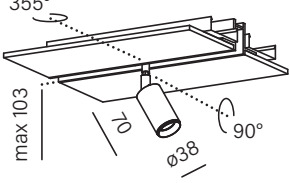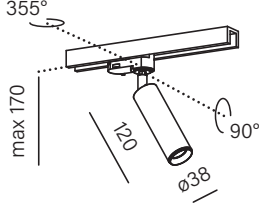track | high multitrack | multitrack | suspended multitrack








CAT. N°	CAT. N°	CAT. N°	CAT. N°
16358-M930-FB-00-12	16435-M930-FB-00-12	16367-M930-FB-00-12	16369-M930-FB-00-12
POWER: 4.5W (M)			
FLUX: 540lm			
OPTICS: 20° (F_)   41° (W_)			
CCT: 2700K (27)   3000K (30)   4000K (40)			
CONTROL: ON/OFF (00)		ON/OFF (00)   ON/OFF second circuit (01)   DALI (DA)	
			



PET track

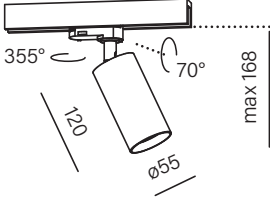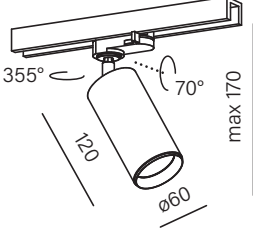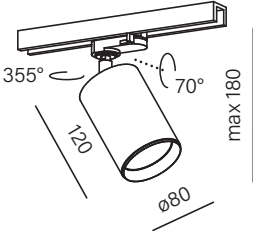maxi | midi | GU10








CAT. N°	CAT. N°	CAT. N°
16370-M930-FB-00-12	16362-M930-FB-00-12	12548-0000-U8-PH-12
POWER: 11.5W (L)   17W (M)   20.5W (H)		POWER: max: 50W
FLUX: 1610lm - 2670lm		CONTROL: Phase-Control (PH)
OPTICS: 19° (S_)   32° (F_)   18° (S_)   35° (F_)   50° (W_)		
CCT: 2700K (27)   3000K (30)   4000K (40)		
CONTROL: ON/OFF (00)   Phase-Control (PH)   DALI (DA)   AQsmart (DB)		
		

light source not included

PET midi

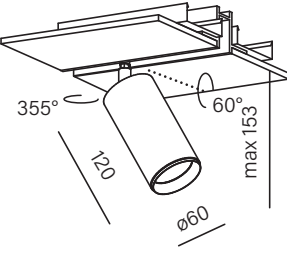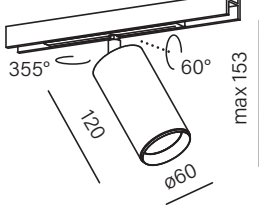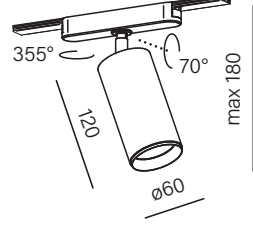
flattrack | multitrack | high multitrack



CAT. N°	CAT. N°	CAT. N°
16493-M930-FB-00-12	16366-M930-FB-00-12	16433-M930-FB-00-12
POWER: 8.5W (M)		
FLUX: 1140lm		
OPTICS: 18° (S_)   35° (F_)   50° (W_)		
CCT: 2700K (27)   3000K (30)   4000K (40)		
CONTROL: ON/OFF (00)		ON/OFF (00)   ON/OFF second circuit (01)   DALI (DA)
		

ACCESSORY

honeycomb



RING FINISHES

not applicable PET GU10

- WHITE -\_W- ○
- BLACK -\_B- ●
- GREY -\_A- ●
- TERRACOTTA -\_R- ●
- TAUPE -\_T- ●
- GOLD -\_G- ●

LUMINAIRE FINISHES

- WHITE -13 ○
- BLACK -12 ●
- GREY -84 ●
- TERRACOTTA -83 ●
- TAUPE -82 ●
- GOLD -19 ●






### Flexibility at its best

HYPER zoom allows you to change the angle using a rotating ring. The 20-45° range makes it possible to highlight various surfaces and objects located in different places in the room.


Hyper zoom in the track version is an extremely flexible solution for a variety of applications, both in private and commercial interiors.

### HYPER zoom maxi track | track

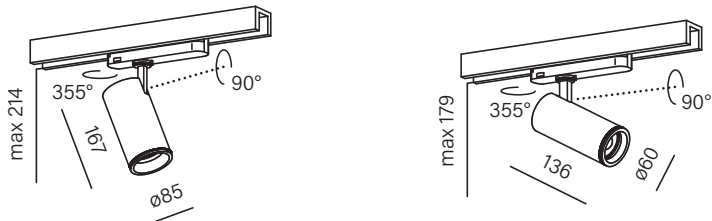

CAT. N°		CAT. N°
16445-M930-Z3-00-12		16446-M930-Z3-00-12
POWER:		17W (L)   24W (M)
FLUX:		2260lm - 3080lm
OPTICS:		20° - 45° (Z3)
CCT:		3000K (30)   4000K (40)
CONTROL:		2700K (27)   3000K (30)   4000K (40)
		ON/OFF (00)   DALI (DA)   Aqsmart (DB)
		UGR<19 230V III 0-10V DALI >90 CRI IP20

### HYPER zoom multitrack | high multitrack | flattrack

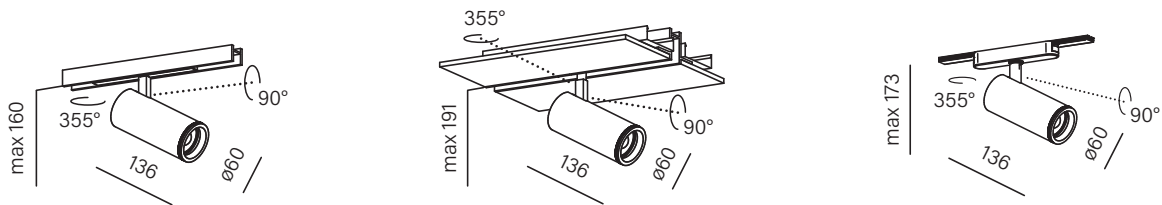

new

CAT. N°		CAT. N°	CAT. N°
16450-M930-Z3-00-12		16449-M930-Z3-00-12	16488-M930-Z3-00-12
POWER:		9W (M)	
FLUX:		1020lm	
OPTICS:		20° - 45° (Z3)	
CCT:		2700K (27)   3000K (30)   4000K (40)	
CONTROL:		ON/OFF (00)   ON/OFF second circuit (01)   DALI (DA)	ON/OFF (00)
		low UGR 48Vdc III 0-10V DALI >90 CRI IP20	low UGR 48Vdc III 0-10V DALI >90 CRI IP20



see the product online

#### LUMINAIRE FINISHES

WHITE -13  
BLACK -12

\*Protection class, input voltage and IP rating for CC luminaires vary from above table.

Data for standard LED product is shown for LED light source 3000K. Other variants are available on our website.



WIELOZADANIOWY

# Rafter

Lots of possibilities  
in a small form

RAFTER mini are versatile fixtures that, despite their small size, can do a lot. The move versions guarantee almost unlimited freedom to direct the luminaire to any place in the interior. Fixtures with a reflector provide precise accent lighting, and models with a milky cover offer diffused light in a larger space. All this, in a minimalist form, which is an interesting addition to modern interiors.




The RAFTER model with a milky cover is a great way to provide even general lighting in the interior or to accentuate a larger space with light.

RAFTER points offer high visual comfort for interior users and precise lighting of selected places in the room. Thanks to the deeply embedded diodes, it provides a high shielding angle and allows for low glare in the interior. It is perfect both as a layer of task and accent lighting, for instance pictures, bookcases or countertops.







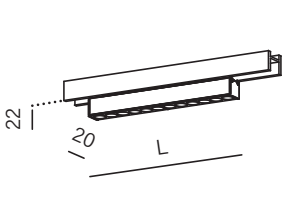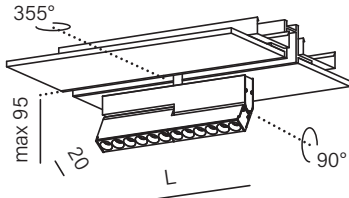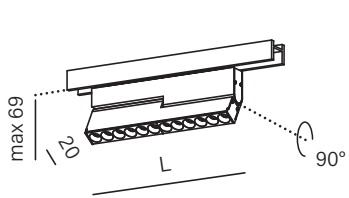



RAFTER mini points

move multitrack | move high multitrack | multitrack






LENGTH	CAT. N°	CAT. N°	CAT. N°
100mm	16455-M930-FB-00-12	16452-M930-FB-00-12	16457-M930-FB-00-12
195mm	16456-M930-FB-00-12	16453-M930-FB-00-12	16458-M930-FB-00-12
POWER:	6.5W - 13W (M)		
FLUX:	680lm ~ 1370lm		
OPTICS:	24° (F_)   45° (W_)		
CCT:	2700K (27)   3000K (30)		
CONTROL:	ON/OFF (00)   ON/OFF second circuit (01)   DALI (DA)		







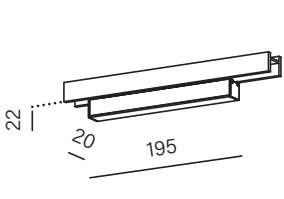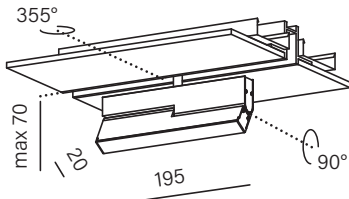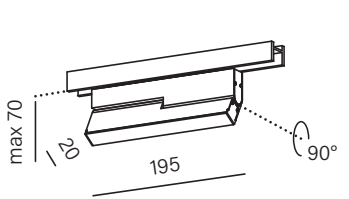


RAFTER mini

move multitrack | move high multitrack | multitrack





CAT. N°	CAT. N°	CAT. N°
16466-M930-D9-00-12	16463-M930-D9-00-12	16461-M930-D9-00-12
POWER:	12.5W (M)	
FLUX:	1410lm	
CCT:	2700K (27)   3000K (30)	
CONTROL:	ON/OFF (00)   ON/OFF second circuit (01)   DALI (DA)	







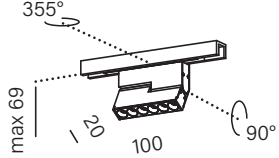



RAFTER mini points

microtrack | move microtrack






CAT. N°	CAT. N°
16451-M930-FB-00-12	16454-M930-FB-00-12
POWER:	6.5W (M)
FLUX:	680lm
OPTICS:	24° (F_)   45° (W_)
CCT:	2700K (27)   3000K (30)
CONTROL:	ON/OFF (00)   DALI (DA)



RAFTER mini flattrack

RAFTER mini points flattrack | move flattrack

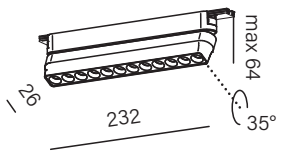
















new


new





new

CAT. N°	CAT. N°	CAT. N°
16503-M930-D9-00-12	16504-M930-FB-00-12	16502-M930-FB-00-12
POWER:	8.5W (M)	11W (M)
FLUX:	1050lm	1180lm
OPTICS:	opal (D9)	38° (F_)
CCT:	2700K (27)   3000K (30)	
CONTROL:	ON/OFF (00)	








- OPTICS FINISHES  
only for points
- WHITE -\_W- 
- BLACK -\_B- 
- LUMINAIRE FINISHES
- WHITE -13 
- BLACK -12 



RAFTER

track | multitrack | high multitrack

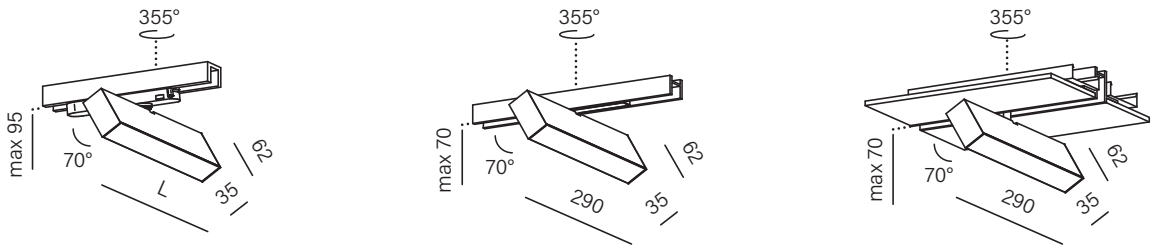


LENGTH	CAT. N°	CAT. N°	CAT. N°
290mm	16335-M930-D9-00-12	16342-M930-D9-00-12	16441-M930-D9-00-12
430mm	16336-M930-D9-00-12		
POWER:	12.5W - 18.5W (M)		12.5W (M)
FLUX:	1550lm - 2320lm		1550lm
OPTICS:	opal (D9)		
CCT:	2700K (27)   3000K (30)   4000K (40)		
CONTROL:	ON/OFF (00)   DALI (DA)   AQsmart (DB)		ON/OFF (00)   ON/OFF second circuit (01)   DALI (DA)

# Rafter

RAFTER points

track | flatrack

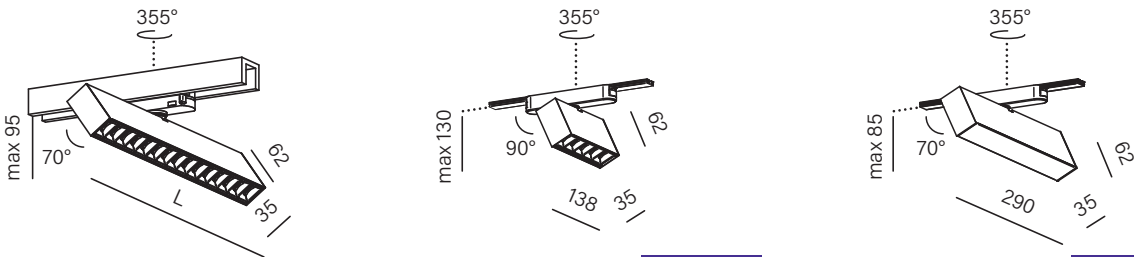


new

new

LENGTH	CAT. N°	CAT. N°	CAT. N°
270mm	16323-M930-FB-00-12	16499-M930-FB-00-12	16498-M930-D9-00-12
400mm	16326-M930-FB-00-12		
POWER:	10W - 15W (L)   20.5W - 31W (M)		18.5W (M)
FLUX:	1200lm - 3020lm		2320lm
OPTICS:	37° (F_)   50° (W_)		opal (D9)
CCT:	2700K (27)   3000K (30)   4000K (40)		
CONTROL:	ON/OFF (00)   DALI (DA)   AQsmart (DB)		ON/OFF (00)

RAFTER points

multitrack | high multitrack | microtrack

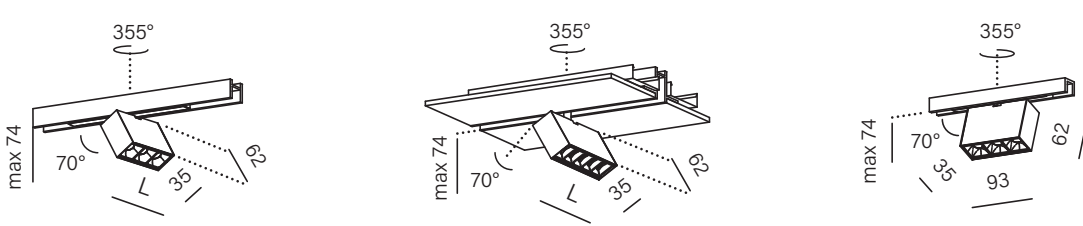

LENGTH	CAT. N°	CAT. N°	CAT. N°
90mm	16419-M930-FB-00-12	16421-M930-FB-00-12	16422-M930-FB-00-12
140mm	16341-M930-FB-00-12	16442-M930-FB-00-12	
POWER:	3W - 5W (M)		3W (M)
FLUX:	360lm - 600lm		360lm
OPTICS:	37° (F_)   50° (W_)		
CCT:	2700K (27)   3000K (30)   4000K (40)		
CONTROL:	ON/OFF (00)   ON/OFF second circuit (01)   DALI (DA)		ON/OFF (00)   DALI (DA)



see the product online

- OPTICS FINISHES
- only for points
- WHITE -\_W-
- BLACK -\_B-
- LUMINAIRE FINISHES
- WHITE -13
- BLACK -12





## Simple form and unique functionality


SET TRU mini are linear fixtures with a slim form, designed for MULTITRACK. They are available in two lengths and optics variants. The first one is a milky opal cover providing diffused light, ideal as general lighting. The second one is the points variant, providing directional light that precisely illuminates the work surface or the floor directly under the fixture.

The SET TRU family of luminaires for track 3F introduces many new possibilities in the lighting of private and commercial interiors.



## A simple way of light in the interior






















The BLOS family luminaires, thanks to their evenly illuminated, milky cover and very high luminous flux, are perfect for soft, comfortable general lighting in the interior. The 3F track version is a very efficient and flexible way to ensure a well-lit interior.

### SET TRU track




### SET TRU mini multitrack | points multitrack





LENGTH	CAT. N°	LENGTH	CAT. N°	LENGTH	CAT. N°
290mm	16392-M930-D9-00-12	570mm	16374-M930-D9-00-12	285mm	16379-M930-WB-00-12
430mm	16393-M930-D9-00-12	1140mm	16375-M930-D9-00-12	565mm	16380-M930-WB-00-12
				845mm	16381-M930-WB-00-12
POWER:	12.5W - 18.5W (M)	8W - 16W (M)		5W - 13W (M)	
FLUX:	1550lm - 2320lm	1070lm - 2140lm		710lm - 2080lm	
OPTICS:	opal (D9)		59° (W_)		
CCT:	2700K (27)   3000K (30)   4000K (40)	3000K (30)   4000K (40)	2700K (27)   3000K (30)   4000K (40)		
CONTROL:	ON/OFF (00)   DALI (DA)   Aqsmart (DB)		ON/OFF (00)   ON/OFF second circuit (01)   DALI (DA)		
      		      		      	



see the product online 

#### OPTICS FINISHES



only for points








**new** WHITE -\_W-   
BLACK -\_B- 

#### LUMINAIRE FINISHES







WHITE -13   
BLACK -12 

### BLOS round suspended track | track




CAT. N°	CAT. N°
16424-M930-D9-00-12	16423-M930-D9-00-12
POWER:	11.5W (L)   23W (M)
FLUX:	1720lm - 3260lm
CCT:	2700K (27)   3000K (30)   4000K (40)
CONTROL:	ON/OFF (00)   DALI (DA)   Aqsmart (DB)
      	

#### LUMINAIRE FINISHES


WHITE -13   
BLACK -12   
GREY -84   
TERRACOTTA -83   
TAUPE -82   
GOLD -19 




see the product online 



MODERN BALL simple mini  
flattrack | suspended flattrack

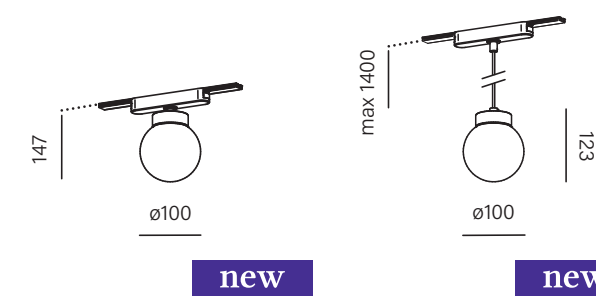


MODERN BALL simple mini  
microtrack | suspended microtrack

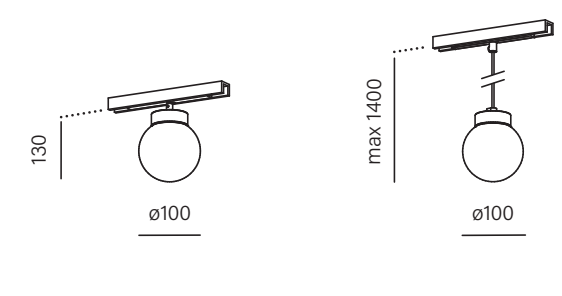


CAT. N°	CAT. N°	CAT. N°	CAT. N°
16491-M930-D0-00-12	16492-M930-D0-00-12	16430-M930-D0-00-12	16431-M930-D0-00-12
POWER: 4W (L)   6W (M)			
FLUX: 580lm - 790lm			
CCT: 2700K (27)   3000K (30)   4000K (40)			
CONTROL: ON/OFF (00)		ON/OFF (00)   DALI (DA)	

MODERN BALL simple midi  
track | suspended track | multitrack | suspended multitrack

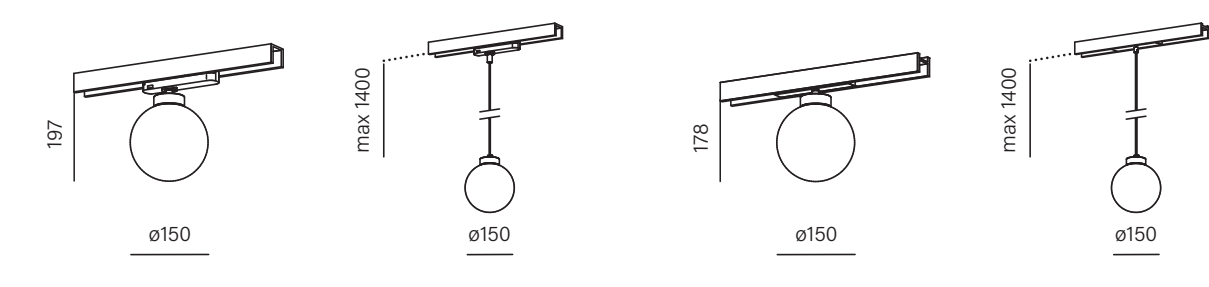

CAT. N°	CAT. N°	CAT. N°	CAT. N°
16386-M930-D0-00-12	16387-M930-D0-00-12	16388-M930-D0-00-12	16389-M930-D0-00-12
POWER: 6W (L)   8.5W (M)			
FLUX: 790lm - 1090lm			
CCT: 2700K (27)   3000K (30)   4000K (40)			
CONTROL: ON/OFF (00)   DALI (DA)		ON/OFF (00)   ON/OFF second circuit (01)   DALI (DA)	



see the product online




Quality, simplicity and style

MODERN BALL simple is a combination of classic form and modern LED technology. The evenly illuminated lampshade emits a lot of light in all directions without dazzling. This provides exceptionally comfortable light throughout the space. It even illuminates the ceiling, resulting in soft light reflected from its surface.

MODERN BALL simple arranged on tracks add character to both modern and more classic interior arrangements.

MODERN BALL simple midi  
high multitrack | flattrack | suspended flattrack

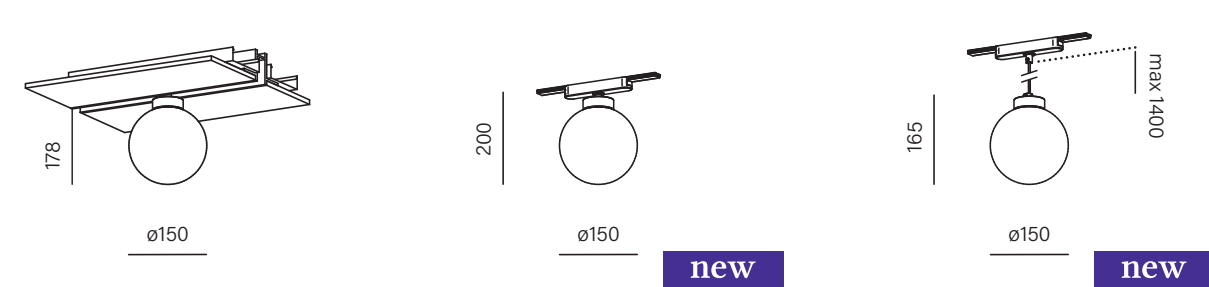


CAT. N°	CAT. N°	CAT. N°
16429-M930-D0-00-12	16489-M930-D0-00-12	16490-M930-D0-00-12
POWER: 6W (L)   8.5W (M)		
FLUX: 790lm - 1090lm		
CCT: 2700K (27)   3000K (30)   4000K (40)		
CONTROL: ON/OFF (00)   ON/OFF second circuit (01)   DALI (DA)		ON/OFF (00)

LUMINAIRE FINISHES

- WHITE -13
- BLACK -12



T track suspended

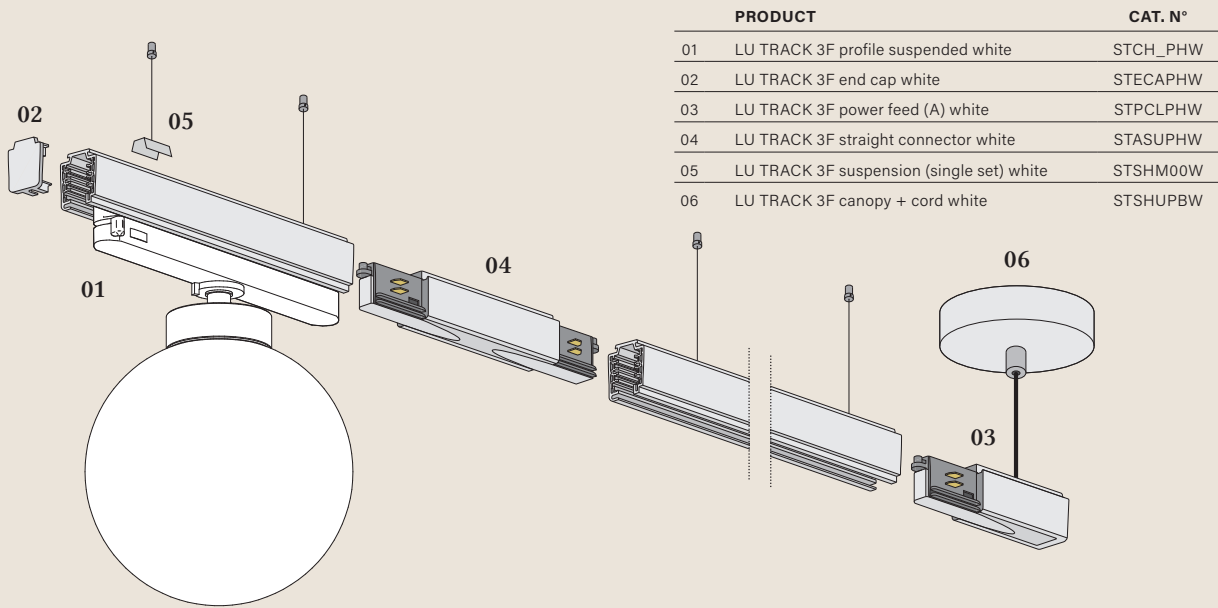


	PRODUCT	CAT. N°
01	LU TRACK 3F profile suspended white	STCH_PHW
02	LU TRACK 3F end cap white	STECAPHW
03	LU TRACK 3F power feed (A) white	STPCLPHW
04	LU TRACK 3F straight connector white	STASUPHW
05	LU TRACK 3F suspension (single set) white	STSHM00W
06	LU TRACK 3F canopy + cord white	STSHUPBW

TIP: within a 3F track you can use 3 separate lighting circuits.

In simple words - you can create 3 separate lighting scenes easily!

Multitrack surface


	PRODUCT	CAT. N°
01	M MULTITRACK profile surface black	SMCM_DAB
02	M MULTITRACK end cap with opening surface/suspended black	SMECH00B
03	M MULTITRACK electrical straight connector universal black	SMASUDAB
04	M MULTITRACK electrical flexible connector universal black	SMPFUDAB
05	M MULTITRACK power feed universal black	SMPCUDAB
06	M MULTITRACK straight connector	SMCSU000
07	M MULTITRACK canopy with power supply EM 100W 48V surface black	SMCMMPBB

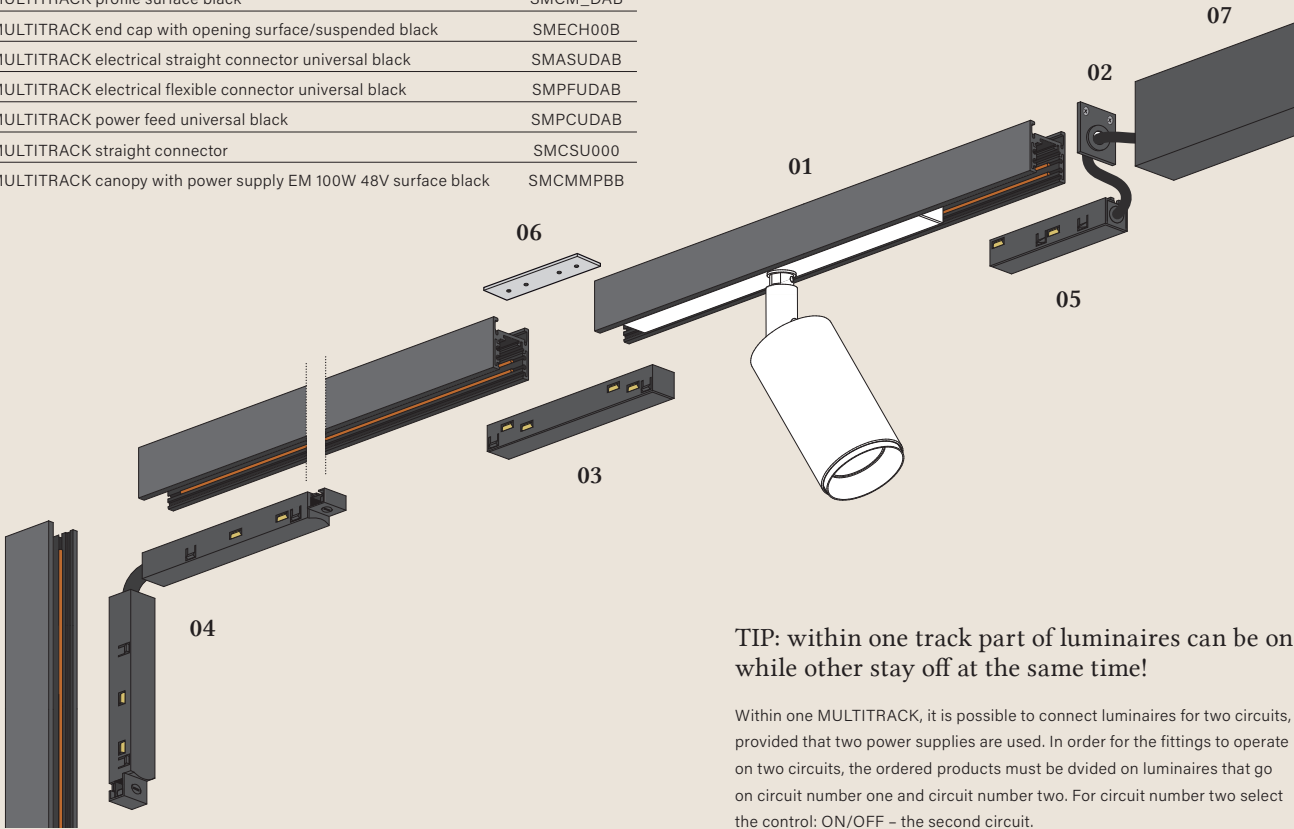

TIP: within one track part of luminaires can be on while other stay off at the same time!


Within one MULTITRACK, it is possible to connect luminaires for two circuits, provided that two power supplies are used. In order for the fittings to operate on two circuits, the ordered products must be divided on luminaires that go on circuit number one and circuit number two. For circuit number two select the control: ON/OFF - the second circuit.

T track DALI surface

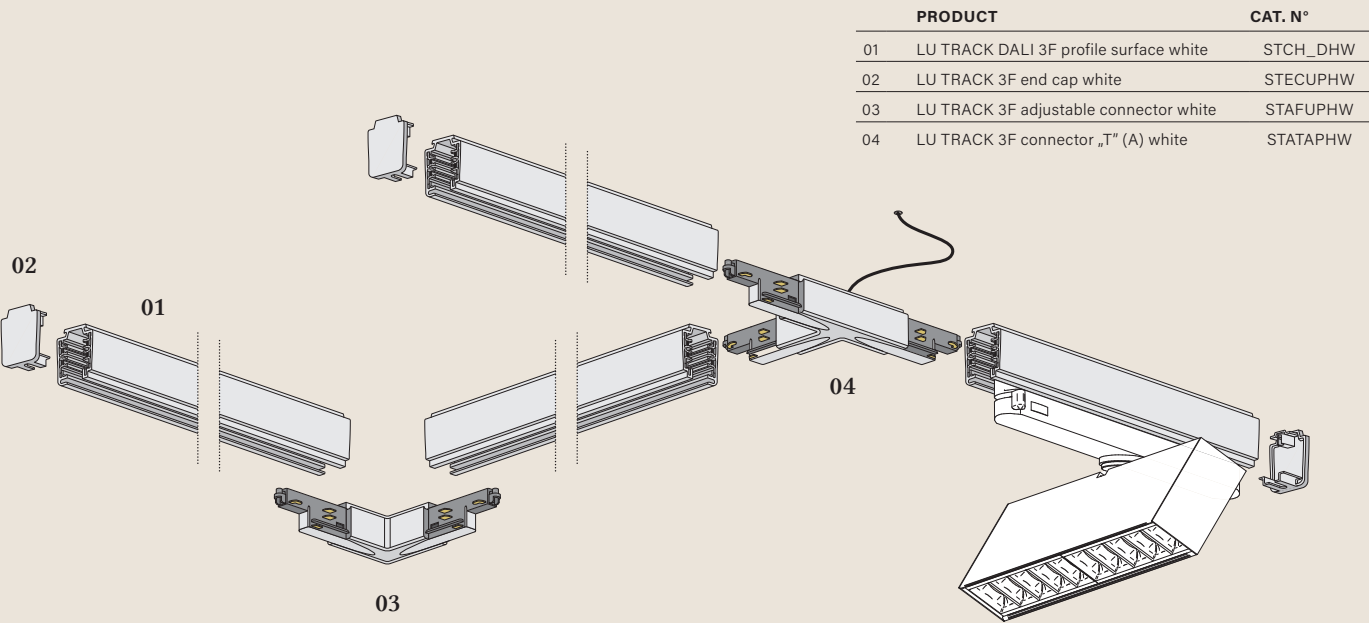


	PRODUCT	CAT. N°
01	LU TRACK DALI 3F profile surface white	STCH_DHW
02	LU TRACK 3F end cap white	STECUPHW
03	LU TRACK 3F adjustable connector white	STAFUPHW
04	LU TRACK 3F connector „T” (A) white	STATAPHW

Multitrack suspended

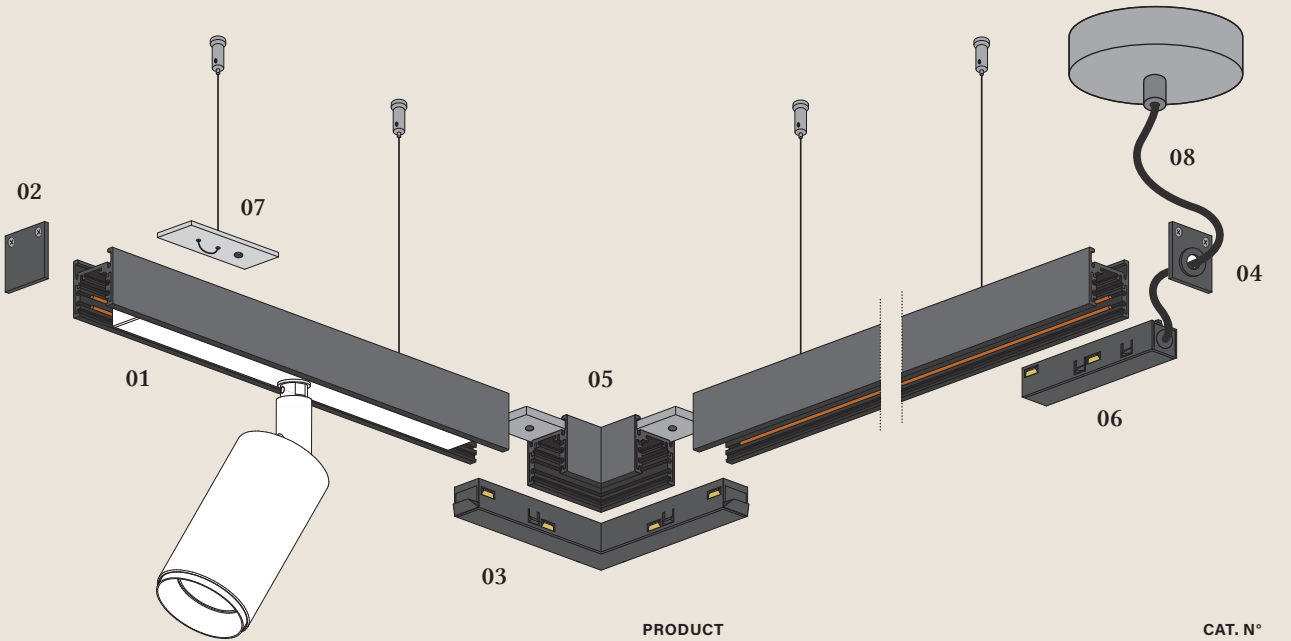

	PRODUCT	CAT. N°
01	M MULTITRACK profile suspended black	SMSM_DAB
02	M MULTITRACK end cap surface/suspended black	SMECU00B
03	M MULTITRACK connector „L” electrical universal black	SMPLUDAB
04	M MULTITRACK end cap with opening surface/suspended black	SMECH00B
05	M MULTITRACK mechanical corner connector „L” surface/suspended	SMCLU00B
06	M MULTITRACK power feed universal black	SMPCUDAB
07	M MULTITRACK suspension set 1,4m suspended	SMW01000
08	Canopy fi100 + power cable 5x0,75mm2 1,4m black	SMCP4PBB





PART OF  
**DELTA**LIGHT  
Group

All dimensions and technical data in catalogues are provided for a guidance purposes only. Actual data may differ slightly due to the production process. Technical information contained within Aquaform's website, data sheets or mounting instructions shall prevail over the information contained in catalogues. Aquaform Inc. reserves the right to change the presented materials and product specifications without prior notice.

Aquaform Inc. takes no responsibility for any possible misprints. All photos, icons and images are copyright protected. Images are illustrative presentations of products and colours. Due to the production process RAL colour of white track and adapter differs a few tones from a standard white finish of AQForm luminaires.

Information contained in the catalogue shall not constitute an offer, also within the meaning of art. 66 § 1 of Polish Civil Code.


© 2024 AQUAFORM Inc. sp. z o.o.  
All rights reserved.

Podane w katalogach wymiary oraz informacje techniczne mają jedynie charakter informacyjny. Rzeczywiste dane mogą się nieznacznie różnić ze względu na proces produkcyjny. Informacje techniczne zawarte na stronie www, w kartach katalogowych oraz w instrukcjach montażu mają pierwszeństwo przed informacjami z katalogów. Aquaform Inc. zastrzega sobie prawo do zmiany przedstawianych materiałów i parametrów technicznych produktów bez wcześniejszego powiadomienia.

Aquaform Inc. nie ponosi odpowiedzialności za możliwe błędy w druku. Zdjęcia są chronione prawnie. Na zdjęciach pokazane jest poglądowe przedstawienie produktów oraz kolorów. Ze względu na proces produkcyjny kolor RAL białych szynoprzewodów oraz adapterów różni się o kilka tonów od standardowego białego wykończenia opraw AQForm.

Informacje zawarte w katalogu nie stanowią oferty handlowej, w tym w rozumieniu art. 66 §1 Kodeksu Cywilnego.

© 2024 AQUAFORM Inc. sp. z o.o.  
Wszelkie prawa zastrzeżone.





~~24~~  
25

MULTITRAC