AQFORM

LIGHTING SOLUTIONS

QUICK SHIPMENT



Hotel-T, Waregem
Photo: I am Liz

Table of contents

Index	008
Recessed	010
Surface	030
Suspended	050
Track&Spot	060
Wall	090
Exterior	100
Drivers	112

QS products are shipped within 2-5 working days

The folder presents selection from our offer.
For our full collection please visit our website **www.aqform.com** or ask for the main catalogue.

Other colour temperatures, beam angles, powers, finishes or sizes are available on our website.

All QS products (quick shipment) will be shipped within 2-5 working days from the order confirmation.

Our standard product are shipped within 15-30 working days counting from the confirmed order.



Hygge Hotel, Opole

MAXI RING dot LED surface | MIDI RING dot LED surface | PET micro R switch LED wall



Hotel-T, Waregem
Photo: I am Liz

End-to-end offer

A cosy living room, a unique lobby or a modern office – thanks to products optimized for the function, AQF lighting will perfectly illuminate all these spaces.

It looks and shines amazingly

No compromise.



Syrena Irena Warszawa
Design: Projekt Praga

Integrated LED lighting available in 2-5 days

In the QS range you will find many products with an integrated LED light source. Our LED luminaires guarantee a high quality light in which it is pleasant to stay.



Local production

Our lighting fixtures are designed, tested and manufactured in Czernichów near Kraków.

Tracks sent from the warehouse

The most popular 3F and magnetic track configurations have been prepared in the warehouse. Therefore, they can get to the site in a short time.

You can choose QS fixtures compatible with track systems and voilà. Lighting is ready in no time.

DOSTĘPNE

Potten & Pannen – Staněk, Czech Republic
Design: Vrtiška & Žak studio
Lighting design: LIGHT WORKS



HOLLOW micro LED hermetic recessed 015


HOLLOW 8 lens move LED recessed 015


HOLLOW 8 move LED recessed 015


PUTT mini LED trimless recessed 019


PUTT midi LED trimless recessed 019


PUTT midi LED recessed 019


PUTT midi move LED hermetic recessed 019


PUTT midi move LED trimless recessed 019


SIRCA LED recessed 021


MIXLINE LED recessed 025


MIXLINE INV LED recessed 025


RAFTER points LED trim recessed 029


RAFTER points LED recessed 029


VYRO x1 round move LED surface 033


VYRO x2 round move LED surface 033


PET mini LED surface 037

PET midi LED surface 037


PET GU10 surface 037


MODERN BALL simple midi LED hermetic surface 039


MAXI RING dot LED surface 043



BLOS round distance LED hermetic surface 045


MIXLINE LED surface 049


CONA E27 suspended 053


OKKA E27 suspended 055


MAXI RING dot LED suspended 059


Tracks 062


PET midi LED multitrack 077


PET midi LED high multitrack 077


PET midi LED track 077


PET GU10 track 077


PET GU10 spot 079


PET mini LED multitrack 079


PET mini LED high multitrack 079


PET mini LED spot 079


RAFTER mini points LED multitrack 083


RAFTER mini LED multitrack 083


RAFTER LED multitrack 083


RAFTER points LED track 083


SET TRU mini LED multitrack 089


SET TRU mini POINTS multitrack 089


PET micro R LED wall 095


PET micro R switch LED wall 095


POCKET mini LED wall 097


SET RAW mini LED hermetic wall 099


PET LED 230V exterior surface 103


LEDPOINT round exterior wall 107


LEDPOINT round up&down exterior wall 107


LEDPOINT square exterior wall 107


LEDPOINT square up&down exterior wall 107


VIP round up&down LED 230V exterior wall 111


VIP square up&down LED 230V exterior wall 111


Recessed




Hotel-T, Waregem
Photo: I am Liz

HOLLOW LED hermetic recessed | VIP round LED 230V exterior wall | MODERN GLASS Tube LED hermetic wall

NEW PRODUCT

Hollow

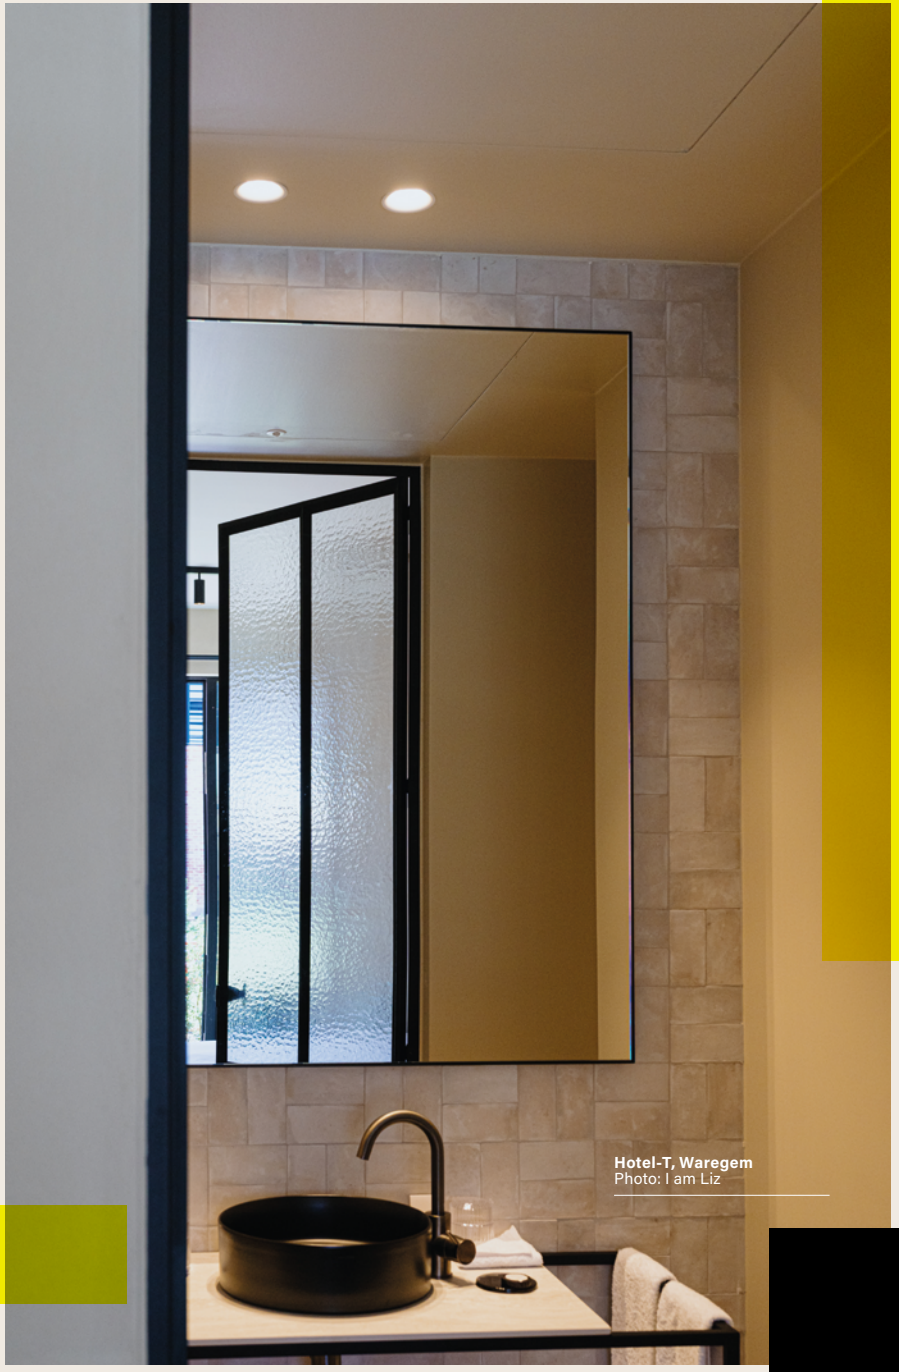


Hotel-T, Waregem
Photo: I am Liz





HOLLOW micro LED hermetic recessed

colour	power	flux	optics	CCT	control	catalogue number
black	2,5W	210lm	30°	2700K	ON/OFF	38011-M927-FB-00-12
white	2,5W	210lm	30°	2700K	ON/OFF	38011-M927-FW-00-13
black	2,5W	220lm	30°	3000K	ON/OFF	38011-M930-FB-00-12
white	2,5W	220lm	30°	3000K	ON/OFF	38011-M930-FW-00-13




voltage range 220-240V

aqform.com/**HL0813**

ø35mm | Hmin: 85mm

HOLLOW 8 lens move LED recessed

colour	power	flux	optics	CCT	control	driver	catalogue number
white	6W	750lm	34°	2700K	ON/OFF		38057-M927-FW-00-13
white	6W	750lm	34°	2700K	bez zasilacza (CC)*	G	38057-A927-FW-CC-13
white	6W	790lm	34°	3000K	ON/OFF		38057-M930-FW-00-13
white	6W	790lm	34°	3000K	bez zasilacza (CC)*	G	38057-A930-FW-CC-13




voltage range 220-240V*

aqform.com/**HL6023**

ø74mm | Hmin: 65mm

HOLLOW 8 move LED recessed

colour	power	flux	optics	CCT	control	driver	catalogue number
white	8,5W	1050lm	41°	2700K	ON/OFF		38053-M927-WW-00-13
white	8,5W	1050lm	41°	2700K	bez zasilacza (CC)*	H	38053-A927-WW-CC-13
white	8,5W	1090lm	41°	3000K	ON/OFF		38053-M930-WW-00-13
white	8,5W	1090lm	41°	3000K	bez zasilacza (CC)*	H	38053-A930-WW-CC-13



voltage range 220-240V*

aqform.com/**HL5023**

ø74mm | Hmin: 105mm

* Control depends on the power supply. The power supply compatibility table is available on page 112. The protection class, input voltage, and IP class for CC luminaires differ from those stated for the product.

The data for the standard LED product is provided for LED light sources. Other product variants are available on our website.



NEW PRODUCT

Putt

Hotel Glar Conference & Spa, Wisełka
Design: NOKE Architects

PUTT midi LED recessed



Hotel Glar Conference & Spa, Wisełka
Design: NOKE Architects



PUTT LED trimless recessed


PUTT midi LED recessed

PUTT midi move LED hermetic recessed

PUTT midi move LED trimless recessed

length	colour	power	flux	optics	CCT	control	catalogue number
44mm	white	4,5W	510lm	41°	2700K	ON/OFF	38014-M927-WW-00-13
44mm	white	4,5W	540lm	41°	3000K	ON/OFF	38014-M930-WW-00-13
65mm	white	8,5W	1090lm	50°	2700K	ON/OFF	38016-M927-WW-00-13
65mm	white	8,5W	1140lm	50°	3000K	ON/OFF	38016-M930-WW-00-13

PUTT mini




voltage range 220-240V

PUTT mini: ø50mm | Hmin: 70mm PUTT midi: ø70mm | Hmin: 90mm


aqform.com/**PT1113**

The possibility to order mounting frames and lighting fixture separately is available in the QS offer. For details, please inquire with AQForm's Sales Department.

PUTT midi



colour	power	flux	optics	CCT	control	catalogue number
white	8,5W	1090lm	50°	2700K	ON/OFF	38015-M927-WW-00-13
white	8,5W	1140lm	50°	3000K	ON/OFF	38015-M930-WW-00-13




voltage range 220-240V

ø70mm | Hmin: 60mm

aqform.com/**PT1013**

colour	power	flux	optics	CCT	control	catalogue number
white	8,5W	1090lm	35°	2700K	ON/OFF	38047-M927-FW-00-13
white	8,5W	1140lm	35°	3000K	ON/OFF	38047-M930-FW-00-13




voltage range 220-240V

ø80mm | Hmin: 65mm

aqform.com/**PT2823**

colour	power	flux	optics	CCT	control	catalogue number
white	8,5W	1090lm	35°	2700K	ON/OFF	38043-M927-FW-00-13
white	8,5W	1140lm	35°	3000K	ON/OFF	38043-M930-FW-00-13



voltage range 220-240V

ø85mm | Hmin: 90mm

aqform.com/**PT2123**

The possibility to order mounting frames and lighting fixture separately is available in the QS offer. For details, please inquire with AQForm's Sales Department.

The data for the standard LED product is provided for LED light sources.
Other product variants are available on our website.

Sirca




colour	power	flux	optics	CCT	control	catalogue number
black	8,5W	1140lm	59°	3000K	ON/OFF	37988-M930-WB-00-12
white	8,5W	1140lm	59°	3000K	ON/OFF	37988-M930-WW-00-13

voltage range 220-240V

aqform.com/**SC0013**

ø95mm | Hmin: 45mm





SIRCA LED recessed




The data for the standard LED product is provided for LED light sources.
Other product variants are available on our website.

Mixline



Apartment 170m², Warszawa
Design: Lys Studio
Photo: Pion Studio



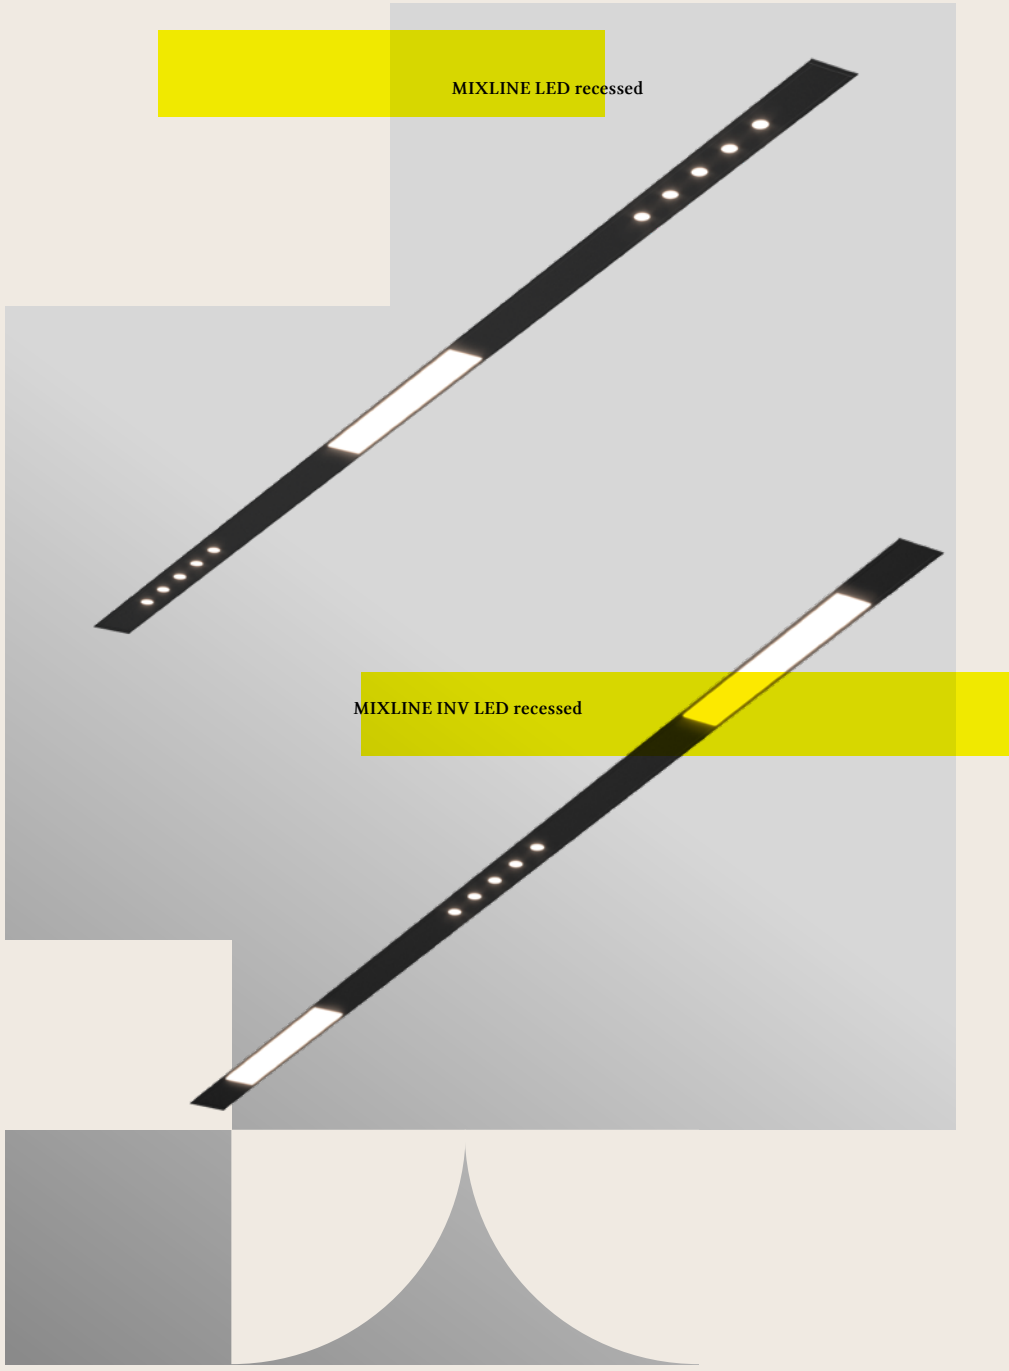


length	colour	power	flux	optics	CCT	control	catalogue number
1600mm	black	16W	2060lm	54°	3000K	ON/OFF	30225-M930-W3-00-12
1880mm	black	24,5W	3220lm	54°	3000K	ON/OFF	30226-M930-W3-00-12
2160mm	black	33W	4390lm	54°	3000K	ON/OFF	30227-M930-W3-00-12




voltage range 220-240V

aqform.com/**MX0013**


MIXLINE 160 LED recessed — 46×1594mm | Hmin 110mm




MIXLINE 188 LED recessed — 46×1874mm | Hmin 110mm



MIXLINE 216 LED recessed — 46×2154mm | Hmin 110mm




length	colour	power	flux	optics	CCT	control	catalogue number
1670mm	black	21W	2770lm	54°	3000K	ON/OFF	30228-M930-W3-00-12
1920mm	black	24,5W	2890lm	54°	3000K	ON/OFF	30229-M930-W3-00-12



voltage range 220-240V

aqform.com/**MX1013**

MIXLINE 167 INV LED recessed — 46×1664mm | Hmin 110mm



MIXLINE 192 INV LED recessed — 46×1914mm | Hmin 110mm



The data for the standard LED product is provided for LED light sources.
Other product variants are available on our website.



Rafter

Nawrocki Clinic
Design: IFA Group
Photo: Hanna Połczyńska/kroniki

Hygge Hotel, Opole



RAFTER points LED trim recessed



RAFTER points LED trim recessed

RAFTER points 27 LED recessed

length	colour	power	flux	optics	CCT	control	catalogue number
75mm	white+black	3W	320lm	50°	3000K	ON/OFF	37972-M930-WB-00-13
147mm	black	7,5W	780lm	50°	3000K	ON/OFF	37973-M930-WB-00-12
147mm	white+black	7,5W	780lm	50°	3000K	ON/OFF	37973-M930-WB-00-13


voltage range 220-240V

aqform.com/**RA2013**


RAFTER points 8: 65x35mm | Hmin: 70mm

RAFTER points 15: 138x35mm | Hmin: 70mm

RAFTER points 8



RAFTER points 15




colour	power	flux	optics	CCT	control	catalogue number
white+black	7,5W	880lm	50°	3000K	ON/OFF	30270-L930-WB-00-13

voltage range 220-240V


aqform.com/**RA1013**

273x37mm | Hmin: 90mm



The data for the standard LED product is provided for LED light sources.
Other product variants are available on our website.

Surface

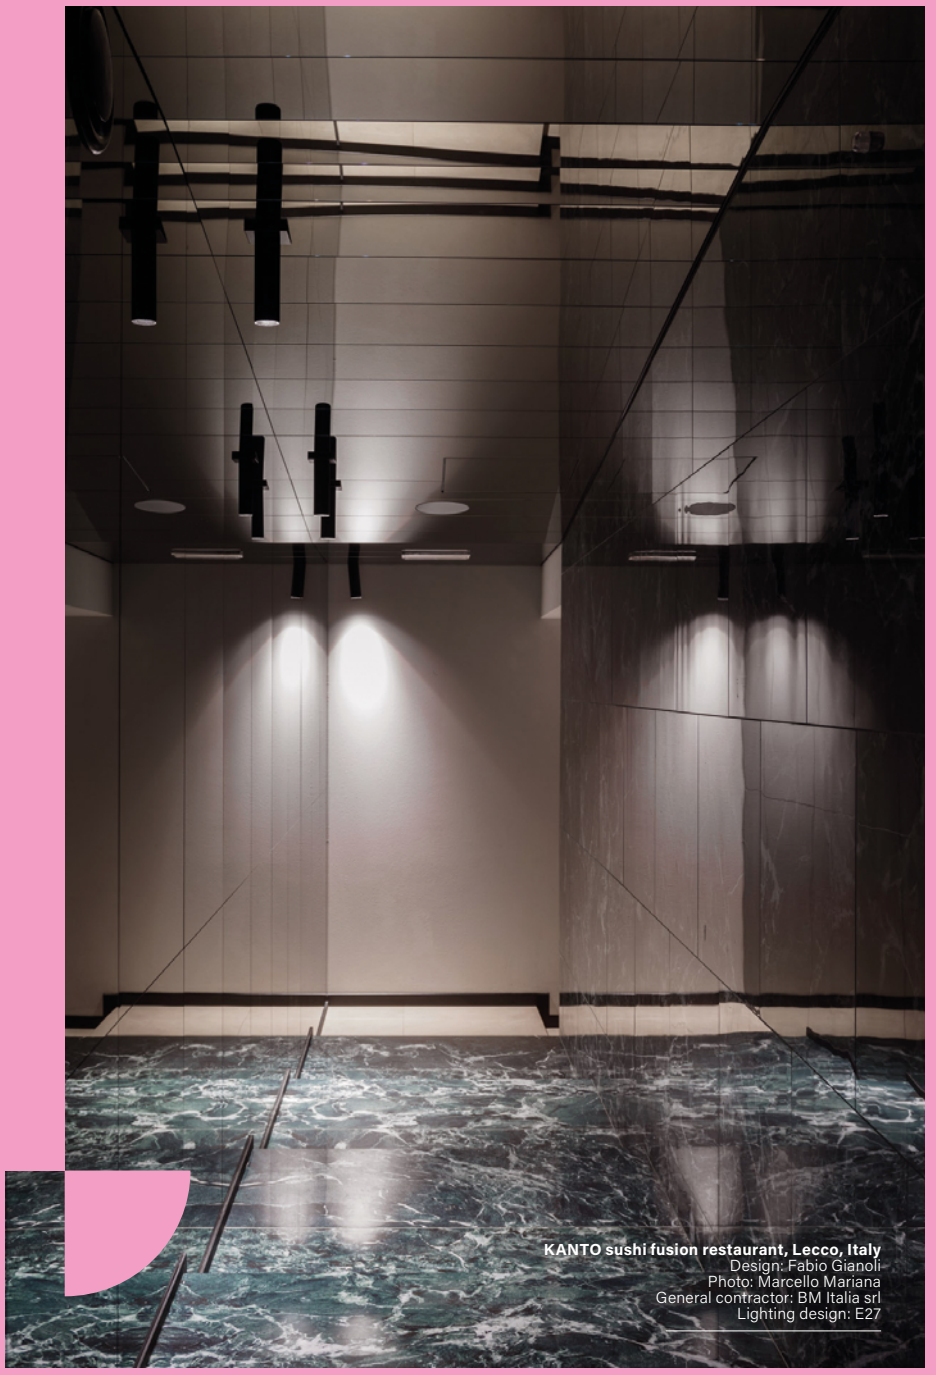


KANTO sushi fusion restaurant, Lecco, Italy
Design: Fabio Gianoli
Photo: Marcello Mariana
General contractor: BM Italia srl
Lighting design: E27



colour	power	flux	optics	CCT	control	catalogue number
white	6W	790lm	59°	3000K	Phase-Control	47037-M930-WW-PH-13

voltage range 220-240V


aqform.com/**VY1214**



colour	power	flux	optics	CCT	control	catalogue number
white	11,5W	1580lm	59°	3000K	Phase-Control	47038-M930-WW-PH-13

voltage range 220-240V

aqform.com/**VY1224**



VYRO x1 round move LED surface



VYRO x2 round move LED surface

The data for the standard LED product is provided for LED light sources.
Other product variants are available on our website.

Pet



Private house, Kaszuby
Design: bkm grup.
Marta Komorowska - Koszałka, Bartosz Koszałka
Photo: Tom Kurek



KANTO sushi fusion restaurant, Lecco, Italy
Design: Fabio Gianoli
Photo: Marcello Mariana
General contractor: BM Italia srl
Lighting design: E27



PET mini LED surface

colour	power	flux	optics	CCT	control	catalogue number
black	4,5W	510lm	41°	2700K	ON/OFF	46959-M927-WB-00-12
white	4,5W	510lm	41°	2700K	ON/OFF	46959-M927-WW-00-13
black	4,5W	540lm	41°	3000K	ON/OFF	46959-M930-WB-00-12
white	4,5W	540lm	41°	3000K	ON/OFF	46959-M930-WW-00-13



voltage range 220-240V

aqform.com/**PE1814**

PET midi LED surface

colour	power	flux	optics	CCT	control	catalogue number
black	8,5W	1090lm	50°	2700K	ON/OFF	46962-M927-WB-00-12
white	8,5W	1090lm	50°	2700K	ON/OFF	46962-M927-WW-00-13
black	8,5W	1140lm	50°	3000K	ON/OFF	46962-M930-WB-00-12
white	8,5W	1140lm	50°	3000K	ON/OFF	46962-M930-WW-00-13



voltage range 220-240V

aqform.com/**PE0814**

PET GU10 surface

colour	power	control	lampholder	catalogue number
black	50W	Phase-Control	GU10	42311-0000-U8-PH-12
white	50W	Phase-Control	GU10	42311-0000-U8-PH-13




voltage range 220-240V

aqform.com/**PE9034**

nie zawiera źródła światła


The data for the standard LED product is provided for LED light sources.
Other product variants are available on our website.

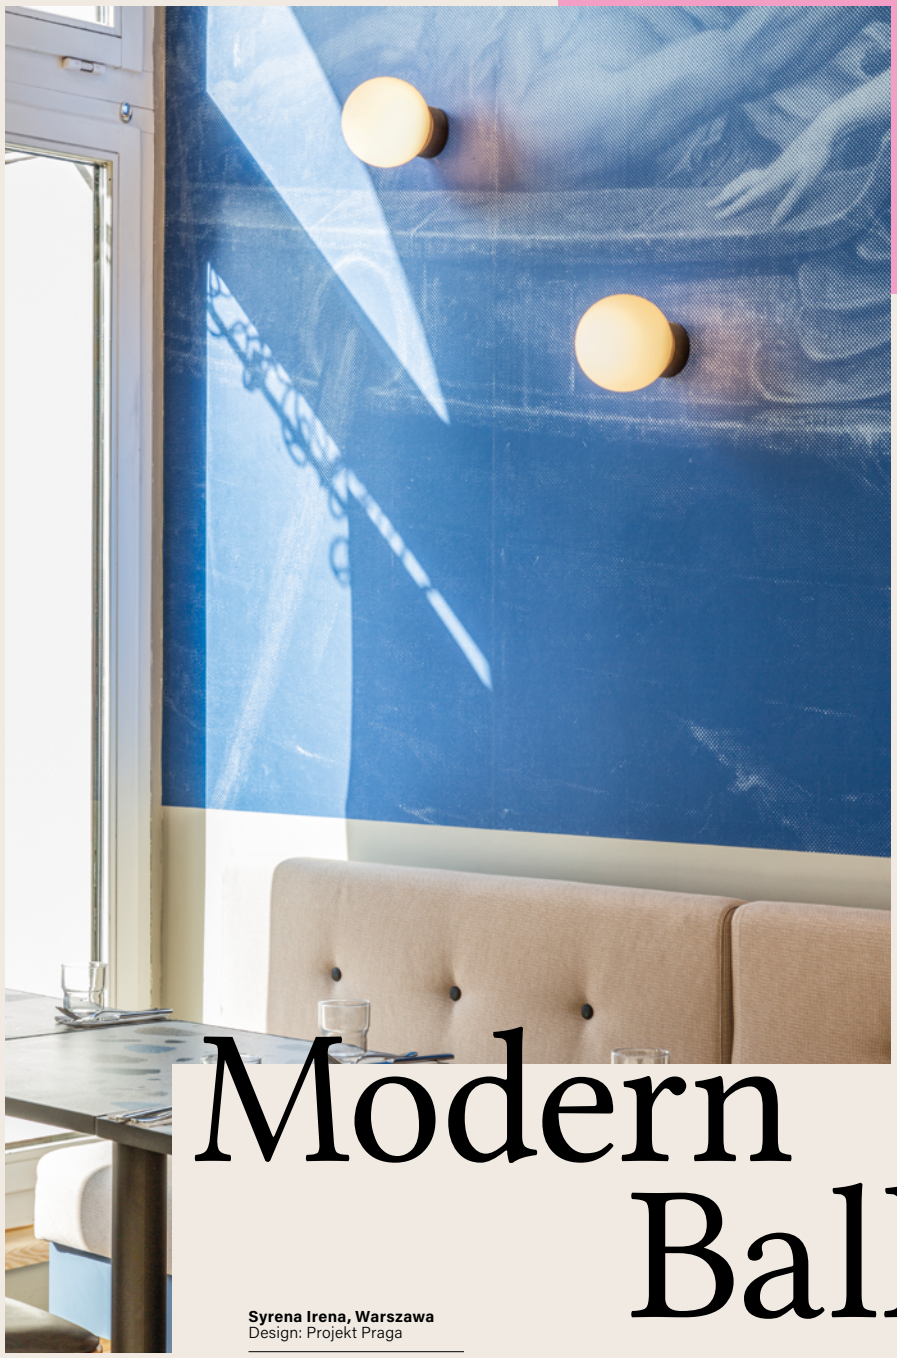

Modern Ball

Syrena Irena, Warszawa
Design: Projekt Praga

colour	power	flux	CCT	control	catalogue number
black	8,5W	1050lm	2700K	ON/OFF	47000-M927-D0-00-12
white	8,5W	1050lm	2700K	ON/OFF	47000-M927-D0-00-13
black	8,5W	1090lm	3000K	ON/OFF	47000-M930-D0-00-12
white	8,5W	1090lm	3000K	ON/OFF	47000-M930-D0-00-13



voltage range 220-240V

aqform.com/**MB5114**

CEILING



MODERN BALL simple midi LED hermetic surface

WALL

MODERN BALL simple surface mounted luminarie is versatile and can be used both as general and wall light.

The data for the standard LED product is provided for LED light sources.
Other product variants are available on our website.



Ring Dot

Hotel Glar Conference & Spa, Wisełka
Design: NOKE Architects




Ola and Wiktor's private apartment, Gdańsk
Design: Vzorovo & Atria Sztuka Światła
Photo: Tom Kurek Tom Kurek

MAXI RING dot LED surface




CEILING

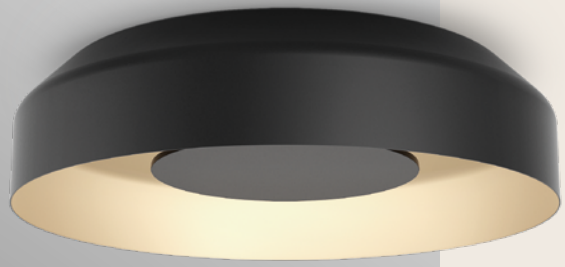

The fixtures from the RING dot collection work well in both ceiling-mounted and wall-mounted versions.

colour	power	flux	CCT	control	catalogue number
black-white	25W	3610lm	2700K	Phase-Control	47027-M927-DW-PH-12
black-gold	25W	3830lm	3000K	Phase-Control	47027-M930-DG-PH-12
black-white	25W	3830lm	3000K	Phase-Control	47027-M930-DW-PH-12




voltage range 220-240V

aqform.com/**MR1014**



WALL

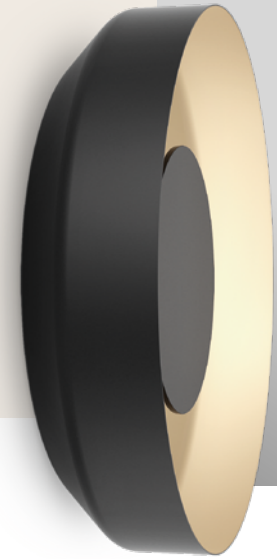


The data for the standard LED product is provided for LED light sources.
Other product variants are available on our website.



Blos

colour	power	flux	CCT	control	catalogue number
white	23W	3260lm	3000K	ON/OFF	47019-M930-D9-00-13



voltage range 220-240V

aqform.com/**BL1814**



BLOS round distance LED hermetic surface

The data for the standard LED product is provided for LED light sources.
Other product variants are available on our website.



Mixline

Pivate apartment, Opole
Design: FABRYK-ART Agata Chomiak, Maciej Ferenc
Photo: Małgorzata Tenczyńska-Korluk



Pivate house, Aleksandrów Łódzki
Design & photo: K.Interio Architektura Wnętrz

MIXLINE LED surface




length	colour	power	flux	optics	CCT	control	catalogue number
1600mm	black	16W	2060lm	54°	3000K	ON/OFF	40286-M930-W3-00-12
1880mm	black	24,5W	3220lm	54°	3000K	ON/OFF	40287-M930-W3-00-12
2160mm	black	33W	4390lm	54°	3000K	ON/OFF	40288-M930-W3-00-12




voltage range 220-240V

aqform.com/**MX0014**


MIXLINE 160 LED surface



MIXLINE 188 LED surface



MIXLINE 216 LED surface



The data for the standard LED product is provided for LED light sources.
Other product variants are available on our website.

Suspended



Mojo Lounge, Zielona Góra
Design: FANAJŁO Home Design Decor
Photo: Krzysztof Strażyński STUDIO

MAXI RING dot LED suspended




Other colours and sizes available in 20 days.
More information on www.aqform.com

colour	power	control	lampholder	catalogue number
terracotta	50W	Phase-Control	E27	59917-0000-U8-PH-83

voltage range 220-240V

aqform.com/**CO0025**

light source not included







NEW PRODUCT


Okka

colour	power	control	lampholder	catalogue number
black + wood panel	15W	Phase-Control	E27	59933-0000-U8-PH-W2

voltage range 220-240V

aqform.com/**OK0025**

light source not included





Other finishes available in 20 days.
More information at www.aqform.com.



Ring Dot




Mojo Lounge, Zielona Góra
Design: FANAJŁO Home Design Decor
Photo: Krzysztof Strażyński STUDIO

DWIE FUNKCJE



MAXI RING dot LED suspended

colour	power	flux	CCT	control	catalogue number
black+white	25W	3610lm	2700K	Phase-Control	59903-M927-DW-PH-12
black+white	25W	3830lm	3000K	Phase-Control	59903-M930-DW-PH-12
black+gold	25W	3830lm	3000K	Phase-Control	59903-M930-DG-PH-12



voltage range 220-240V

aqform.com/**MR1015**


The data for the standard LED product is provided for LED light sources.
Other product variants are available on our website.

Track&Spot



Hairdresser's salon, Warszawa
Design: Sikora Wnętrza Architektura Jan Sikora
Photo: Tom Kurek

Type of tracks

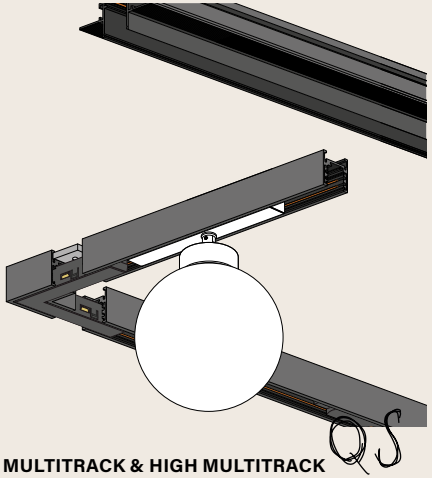

MULTITRACK & HIGH MULTITRACK


Flexibility in a simple form

The MULTITRACK system is available in surface-mounted, suspended and recessed versions, as well as in two depths.

Available accessories and connectors allow you to create complex systems, even with adirect transition from the ceiling to the wall.

There is a safe voltage of 48V inside the track, so the MULTITRACK system can also be used in places within easy reach.

The MULTITRACK system requires a separate power supply. It can be installed in a suspended ceiling or in built-in furniture. Another solution is to use the power supply in a surface-mounted box mounted on the ceiling and constituting an extension of the track. There is also a power supply plugged directly into the track (exactly the same as the luminaires), as well as a power supply mounted on a DIM track in the distribution box. There are plenty of possibilities. Each of them requires slightly different electrical installation.

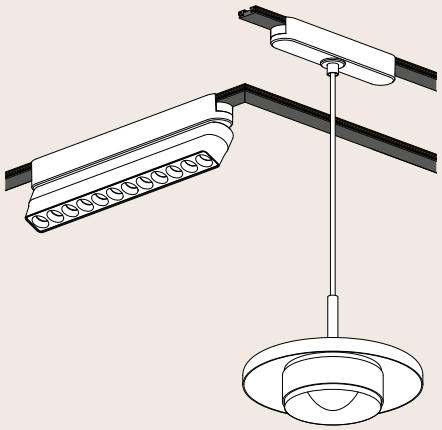

FLATTRACK

The most subtle track system on the market

Due to its extremely small dimensions, measuring only 6.7mm in height and 18mm in width, the FLATTRACK system is available exclusively in surface-mounted versions. With a safe 48V voltage, it can be confidently installed on walls.

With lengths of tracks reaching up to 3m, a set of accessories and a wide selection of lighting fixtures for the FLATTRACK system, there is flexibility to create diverse arrangements within interiors. Copper wires run along the sides of the tracks, graphite-coated, making this system not only exceptionally discreet.


FLATTRACK is available within a standard lead time of 20 days. More information can be found on our website.



MICROTRACK

Exceptionally discreet form with numerous possibilities

The track systems of the MICROTRACK are available in both recessed and surface mounted versions. Their compact dimensions allow for the creation of exceptionally subtle compositions on the walls and ceilings. Lighting fixture adapters are inserted into the middle of the track, seamlessly integrating with the discreet line of the tracks themselves. A complete set of accessories and a wide selection of fixtures provide ample creative freedom. Safe 48V voltage allows for convenient installation within reach. It requires the use of a separate power supply, available in various versions - with a surface -mounted box for installation in a suspended ceiling, as well as for installation in a distribution box.

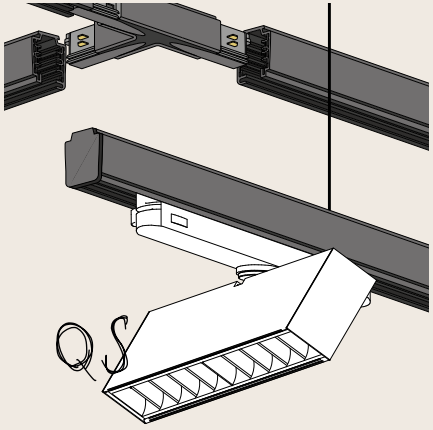

TRACK 3F & DALI

3F tracks combine flexibility, minimalistic design and affordable price


They are powered by 230V, so to connect them, all you need is a standard cable on the ceiling and a power terminal or one of the connectors with the possibility of connecting the power supply (straight connector, “L”, “T” or “X”).


They make it possible to divide lighting fixtures into up to three circuits so that they work independently. This requires a 5-wire cable between the wall switches and the track connection. They are made of aluminum profile painted black (RAL 9005) or white (RAL 9003).

The DALI version of the 3F tracks is intended for interiors where a wired digital control system based on the DALI protocol is used. This solution allows for independent addressing of the luminaires. In other words, it is possible to program light scenes, dim luminaires and combine them into groups.

Multitrack

Tracks			Suspended	Surface	Recessed
length	**colour**	**QS 2024**	**catalogue number**	**catalogue number**	**catalogue number**
1000mm	black	QS	SMSM1DAB	SMCM1DAB	SMRM1DAB
2000mm	black	QS	SMSM2DAB	SMCM2DAB	SMRM2DAB
1000mm	white	QS	SMSM1DAW	SMCM1DAW	SMRM1DAW
2000mm	white	QS	SMSM2DAW	SMCM2DAW	SMRM2DAW

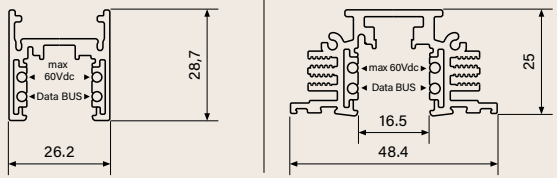

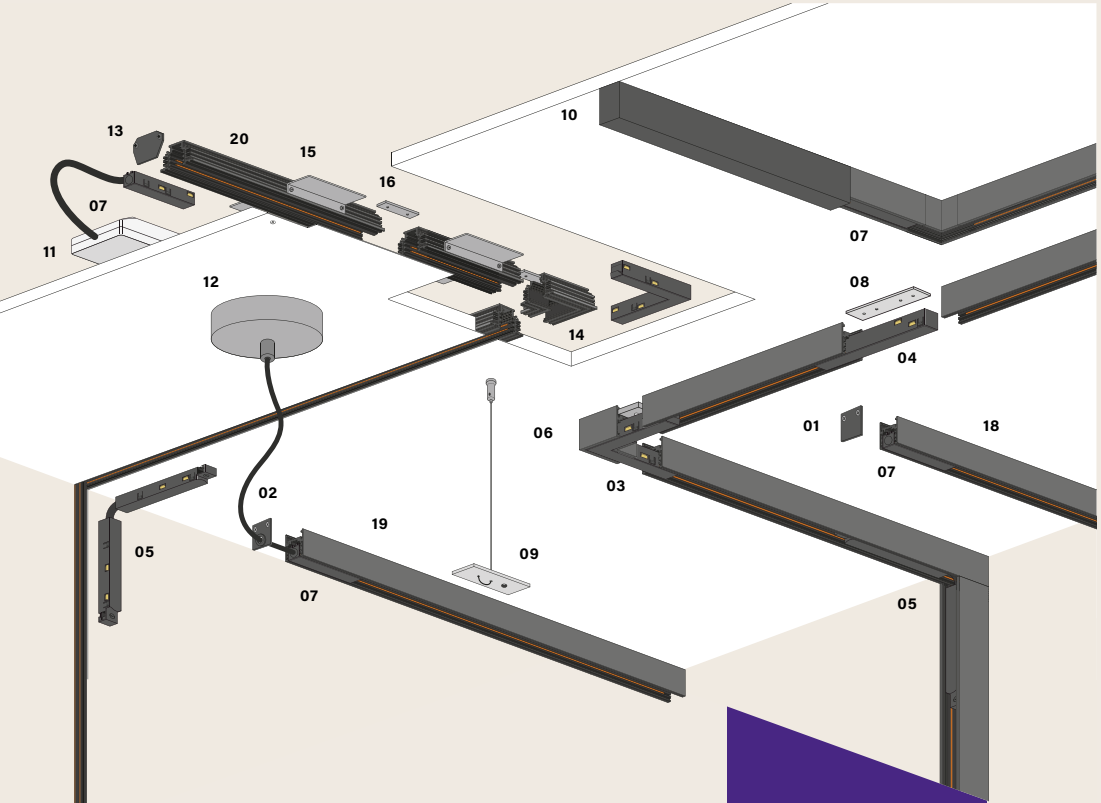



Accessories

	product	QS 2024	colour	catalogue number
01	M MULTITRACK end cap surface/suspended	QS	black	SMECU00B
		QS	white	SMECU00W
02	M MULTITRACK end cap with opening surface/suspended	QS	black	SMECH00B
		QS	white	SMECH00W
03	M MULTITRACK connector „L" electrical universal	QS	black	SMPLUDAB
		QS	white	SMPLUDAW
04	M MULTITRACK electrical straight connector universal	QS	black	SMASUDAB
		QS	white	SMASUDAW
05	M MULTITRACK electrical flexible connector universal	QS	black	SMPFUDAB
		QS	white	SMPFUDAW
06	M MULTITRACK mechanical connector „L" surface/suspended	QS	black	SMCLU00B
		QS	white	SMCLU00W
07	M MULTITRACK power feed universal	QS	black	SMPCUDAB
		QS	white	SMPCUDAW
08	M MULTITRACK straight connector	QS		SMCSU000
09	M MULTITRACK suspension set 1,4m suspended	QS		SMW01000
10	M MULTITRACK canopy with power supply EM 100W 48V surface	QS	black	SMCMMPBB
		QS	white	SMCMMPBW
11	Power supply 60W 48V	QS		SHRP0600
	Power supply 100W 48V	QS		SHRP0100
	Power supply 200W 48V	QS		SHRP0200
	Power supply DIN rail 120W 48V	QS		SHRP0120
12	MULTITRACK canopy fi100 + power cable 2x0,75mm2 1,4m	QS	black	SMCP4PBB
		QS	white	SMCP4PBW
13	M MULTITRACK end cap recessed	QS	black	SMECF00B
		QS	white	SMECF00W
14	M MULTITRACK mechanical connector „L" recessed	QS	black	SMRLF00B
		QS	white	SMRLF00W
15	M MULTITRACK mounting brackets set (2 pcs.) for recessed track	QS		SMRFU00U
16	M MULTITRACK mechanical straight connector recessed	QS		SMRSU00U

High Multitrack

Tracks			Suspended	Surface	Recessed
length	colour	QS 2024	catalogue number	catalogue number	catalogue number
1000mm	black	QS	SHSM1DAB	SHCM1DAB	SHRM1DAB
2000mm	black	QS	SHSM2DAB	SHCM2DAB	SHRM2DAB
1000mm	white	QS	SHSM1DAW	SHCM1DAW	SHRM1DAW
2000mm	white	QS	SHSM2DAW	SHCM2DAW	SHRM2DAW
3000mm	black		SHSM3DAB	SHCM3DAB	SHRM3DAB

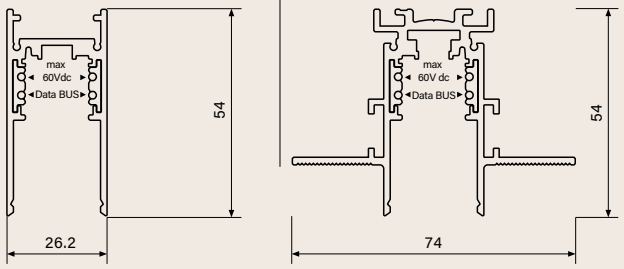

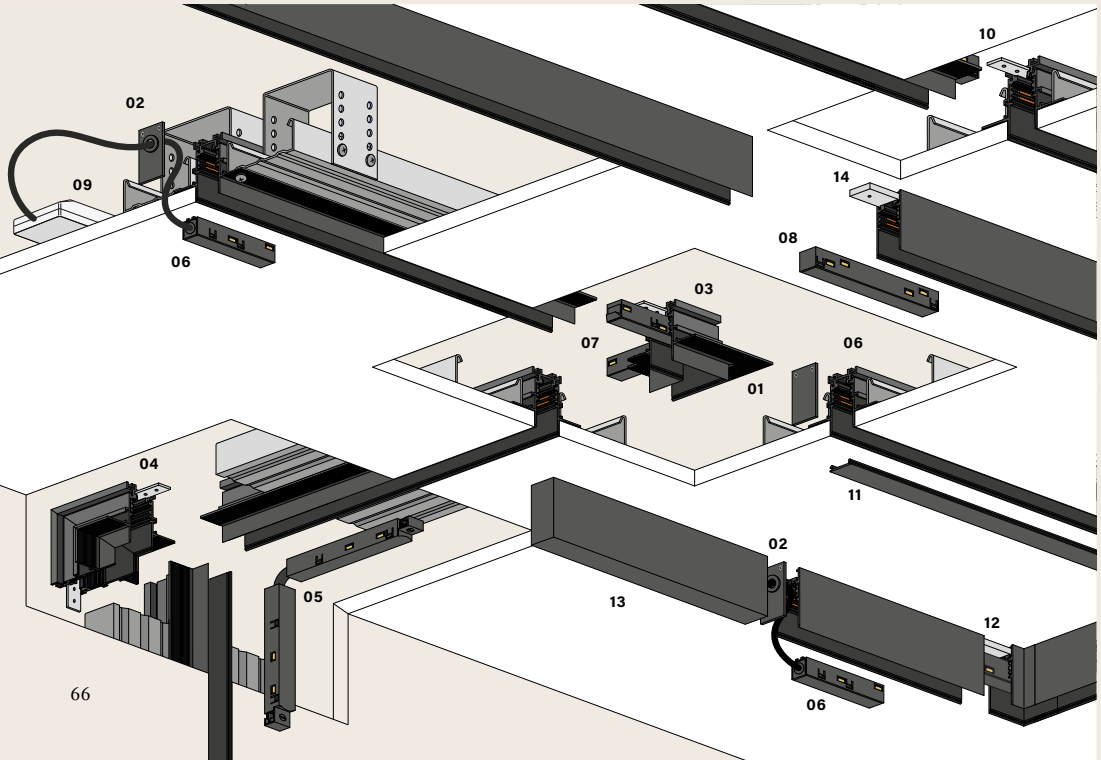

Accessories


	product	QS 2024	colour	catalogue number
01	M HIGH MULTITRACK end cap recessed	QS	black	SHECU00B
		QS	white	SHECU00W
02	M HIGH MULTITRACK end cap with opening	QS	black	SHECH00B
		QS	white	SHECH00W
03	M HIGH MULTITRACK mechanical connector „L" recessed	QS	black	SHRLF00B
		QS	white	SHRLF00W
04	M HIGH MULTITRACK mechanical connector wall-ceiling recessed	QS	black	SHRFU00B
		QS	white	SHRFU00W
05	M MULTITRACK electrical flexible connector universal	QS	black	SMPFUDAB
		QS	white	SMPFUDAW
06	M MULTITRACK electrical straight connector universal	QS	black	SMPCUDAB
		QS	white	SMPCUDAW
07	M MULTITRACK connector „L" electrical universal	QS	black	SMPLUDAB
		QS	white	SMPLUDAW
08	M MULTITRACK electrical straight connector universal black	QS	black	SMASUDAB
		QS	white	SMASUDAW
09	Power supply 60W 48V	QS		SHRP0600
	Power supply 100W 48V	QS		SHRP0100
	Power supply 200W 48V	QS		SHRP0200
	Power supply DIN rail 120W 48V	QS		SHRP0120
10	M MULTITRACK mechanical straight connector recessed	QS		SMRSU00U
11	HIGH MULTITRACK installation cover 2m black	QS	black	SHRMFF00B
12	M HIGH MULTITRACK mechanical connector „L" surface black	QS	black	SHCLU00B
		QS	white	SHCLU00W
13	M HIGH MULTITRACK power supply canopy 100W 48V surface	QS	black	SHCP2PBB
			white	SHCP2PBW
	HIGH MULTITRACK installation template	QS		SHRMFM00U
	The template is an accessory for mounting the recessed track			
14	M MULTITRACK straight connector	QS		SMCSU000

Microtrack


Microtrack allows for surface or recessed mounting. Especially in the latter version, it is an exceptionally discreet element of the interior, while providing all the possibilities of low-voltage busbar.


It is not only exceptionally safe, enough to mount it within reach, but maintains compatibility with DALI and other digital control protocols. Its uncompromising minimalist aesthetics do not impose any restrictions on the creation of light scenes or the possibility of changing lighting arrangements.

MICROTRACK surface

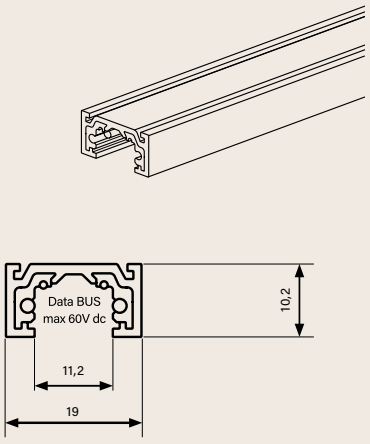

MICROTRACK recessed

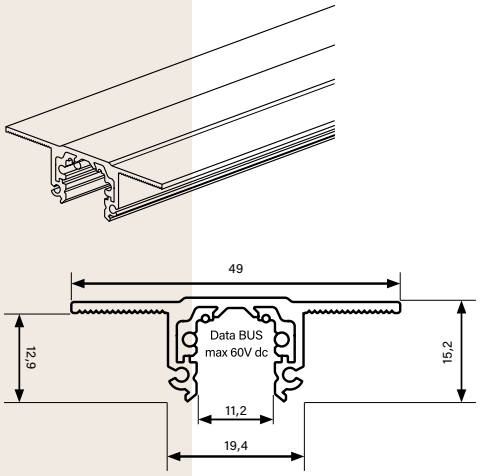

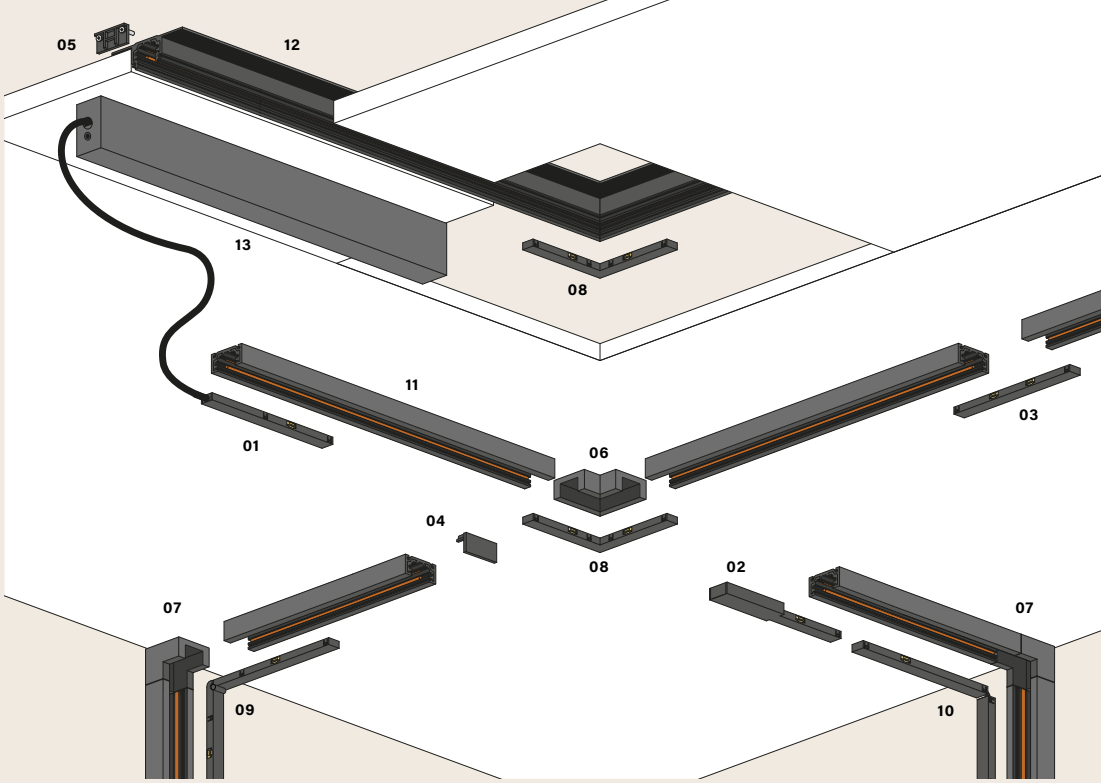


Accessories and tracks

	product	QS 2024	colour	catalogue number
01	MICROTRACK power end cup with cable 2,5m	QS	black	SOPCU00B
02	O MICROTRACK power end cup (only surface)	QS	black	SOPMU00B
03	O MICROTRACK electrical straight connector universal	QS	black	SOPSUDAB
04	O MICROTRACK end cap surface	QS	black	SOSCU00B
05	O MICROTRACK end cap (screws) surface	QS	black	SORCU00B
06	O MICROTRACK connector „L"	QS	black	SOCLU00B
07	O MICROTRACK ceiling-wall connector		black	SORLU00B
08	O MICROTRACK electrical connector „L" universal	QS	black	SOPLUDAB
09	O MICROTRACK electrical ceiling-wall connector		black	SOPWUDAB
10	O MICROTRACK electrical flexible connector universal	QS	black	SOPFUDAB
11	O MICROTRACK profile 1m surface	QS	black	SOCM1DAB
	O MICROTRACK profile 2m surface	QS	black	SOCM2DAB
12	O MICROTRACK profile 1m recessed	QS	black	SORM1DAB
	O MICROTRACK profile 2m recessed	QS	black	SORM2DAB
13	O MICROTRACK power box with opening for cable 100W 48V surface	QS	black	SOCP2PBB
	Power supply 60W 48V	QS		SHRP0600
	Power supply 100W 48V	QS		SHRP0100
	Power supply 200W 48V	QS		SHRP0200
	Power supply DIN rail 120W 48V	QS		SHRP0120

Track 3F

Tracks **suspended + surface**


length	colour	QS 2024	catalogue number
1000mm	black	QS	STCH1PHB
1000mm	white	QS	STCH1PHW
2000mm	black	QS	STCH2PHB
2000mm	white	QS	STCH2PHW
3000mm	black	QS	STCH3PHB
3000mm	white	QS	STCH3PHW




suspended


black (RAL9005)


white (RAL9003)



surface



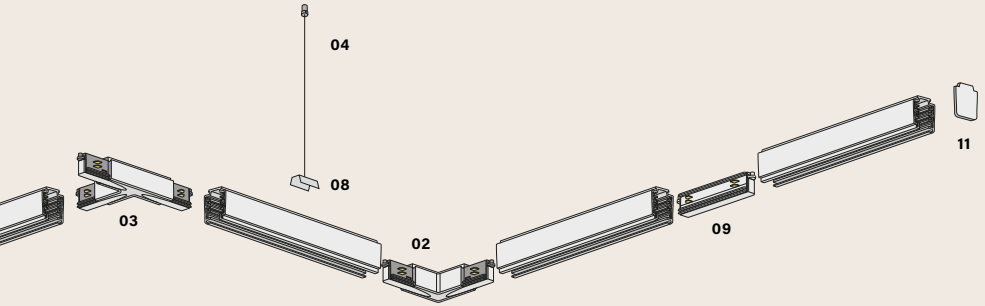

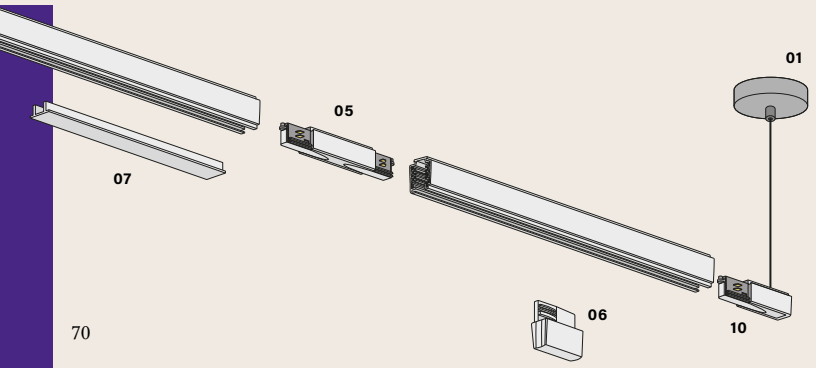

Accessories

	product	QS 2024	colour	catalogue number
01	TRACK canopy + cord	QS	black	STSHUPBB
		QS	white	STSHUPBW
02	LU TRACK 3F connector „L" universal	QS	black	STALUPHB
		QS	white	STALUPHW
03	LU TRACK 3F connector „T" (A)	QS	black	STATAPHB
		QS	white	STATAPHW
	LU TRACK 3F connector „T" (B)	QS	black	STATBPHB
		QS	white	STATBPHW
	LU TRACK 3F connector „T" (C)		black	STATCPHB
			white	STATCPHW
	LU TRACK 3F connector „T" (D)		black	STATDPHB
			white	STATDPHW
04	TRACK suspension (single set)	QS	black	STSHM00B
		QS	white	STSHM00W
05	LU TRACK 3F straight connector black	QS	black	STASUPHB
		QS	white	STASUPHW
06	LU TRACK 3F power outlet adapter	QS	black	STAPUPHB
		QS	white	STAPUPHW
07	LU TRACK PC cover strip 2m		black	STCCM00B
			white	STCCM00W
08	LU TRACK ceiling bracket	QS	black	STCHM00B
		QS	white	STCHM00W
09	LU TRACK 3F universal internal jointing unit	QS		STAIUPHU
10	LU TRACK 3F power feed (A)	QS	black	STPCLPHB
		QS	white	STPCLPHW
	LU TRACK 3F power feed (B)	QS	black	STPCRPHB
		QS	white	STPCRPHW
11	LU TRACK 3F end cap	QS	black	STECUPHB
		QS	white	STECUPHW



Pet

Hairdresser's salon, Warszawa
Design: Sikora Wnętrza Architektura Jan Sikora
Photo: Tom Kurek

PET midi LED track



Hotel-T, Waregem
Photo: I am Liz



Mojo Lounge, Zielona Góra
Design: FANAJŁO Home Design Decor
Photo: Krzysztof Strażyński STUDIO

PET mini LED multitrack



Mojo Lounge, Zielona Góra
Design: FANAJŁO Home Design Decor
Photo: Krzysztof Strażyński STUDIO

PET midi LED multitrack




PET midi LED high multitrack




PET midi LED track



PET GU10 track




colour	power	flux	optics	CCT	control	catalogue number
black	8,5W	1090lm	50°	2700K	ON/OFF	16366-M927-WB-00-12
white	8,5W	1090lm	50°	2700K	ON/OFF	16366-M927-WW-00-13
black	8,5W	1090lm	50°	2700K	DALI	16366-M927-WB-DA-12
white	8,5W	1090lm	50°	2700K	DALI	16366-M927-WW-DA-13
black	8,5W	1140lm	50°	3000K	ON/OFF	16366-M930-WB-00-12
white	8,5W	1140lm	50°	3000K	ON/OFF	16366-M930-WW-00-13
black	8,5W	1140lm	50°	3000K	DALI	16366-M930-WB-DA-12
white	8,5W	1140lm	50°	3000K	DALI	16366-M930-WW-DA-13



voltage range 220-240V

aqform.com/**PE0817**


colour	power	flux	optics	CCT	control	catalogue number
black	8,5W	1090lm	50°	2700K	ON/OFF	16433-M927-WB-00-12
black	8,5W	1090lm	50°	2700K	DALI	16433-M930-WB-DA-12
black	8,5W	1140lm	50°	3000K	ON/OFF	16433-M927-WB-00-12
black	8,5W	1140lm	50°	3000K	DALI	16433-M930-WB-DA-12



voltage range 220-240V

aqform.com/**PE0818**


colour	power	flux	optics	CCT	control	catalogue number
black	8,5W	1090lm	50°	2700K	ON/OFF	16362-M927-WB-00-12
white	8,5W	1090lm	50°	2700K	ON/OFF	16362-M927-WW-00-13
black	8,5W	1140lm	50°	3000K	ON/OFF	16362-M930-WB-00-12
white	8,5W	1140lm	50°	3000K	ON/OFF	16362-M930-WW-00-13



voltage range 220-240V

aqform.com/**PP0816**

colour	power	control	lampholder	catalogue number
black	50W	Phase-Control	GU10	12548-0000-U8-PH-12
white	50W	Phase-Control	GU10	12548-0000-U8-PH-13



voltage range 220-240V

aqform.com/**12548**

light source not included

The data for the standard LED product is provided for LED light sources.
Other product variants are available on our website.



PET GU10 spot


PET mini LED multitrack

PET mini LED high multitrack

PET mini LED spot

PET GU10 spot

colour	power	control	lampholder	catalogue number
black	50W	Phase-Control	GU10	10045-0000-U8-PH-12
white	50W	Phase-Control	GU10	10045-0000-U8-PH-13




voltage range 220-240V

aqform.com/**10045**

light source not included

PET mini LED multitrack

colour	power	flux	optics	CCT	control	catalogue number
black	4,5W	510lm	41°	2700K	ON/OFF	16367-M927-WB-00-12
white	4,5W	510lm	41°	2700K	ON/OFF	16367-M927-WW-00-13
black	4,5W	540lm	41°	3000K	ON/OFF	16367-M930-WB-00-12
white	4,5W	540lm	41°	3000K	ON/OFF	16367-M930-WW-00-13




voltage range 45-50V

aqform.com/**PE3817**

PET mini LED high multitrack

colour	power	flux	optics	CCT	control	catalogue number
white	4,5W	510lm	41°	2700K	ON/OFF	16435-M927-WW-00-13




voltage range 45-50V

aqform.com/**PE3818**

PET mini LED spot

colour	power	flux	optics	CCT	control	catalogue number
black	4,5W	510lm	41°	2700K	ON/OFF	16359-M927-WB-00-12
white	4,5W	510lm	41°	2700K	ON/OFF	16359-M927-WW-00-13
black	4,5W	540lm	41°	3000K	ON/OFF	16359-M930-WB-00-12
white	4,5W	540lm	41°	3000K	ON/OFF	16359-M930-WW-00-13



voltage range 220-240V

aqform.com/**PE1811**

The data for the standard LED product is provided for LED light sources.
Other product variants are available on our website.


Rafter






Apartment, Warszawa
Design: DOMagała Design
Photo: Tom Kurek


RAFTER mini points LED multitrack

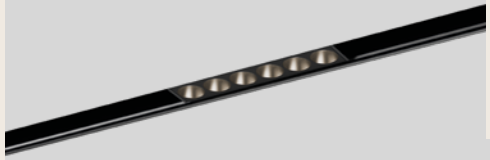

RAFTER mini LED multitrack

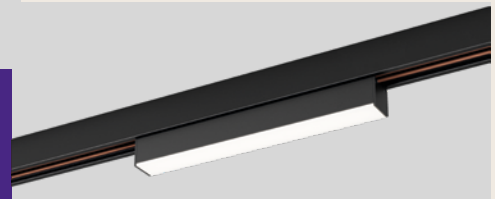

RAFTER LED multitrack

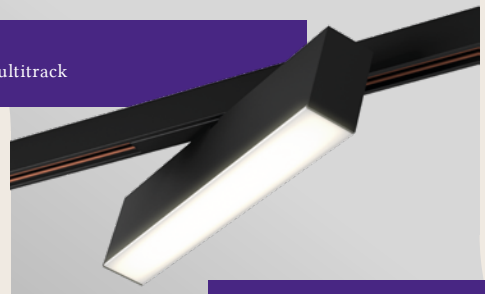


RAFTER points LED track



RAFTER LED track




length	colour	power	flux	optics	CCT	control	catalogue number
99mm	black	6,5W	640lm	45°	2700K	ON/OFF	16457-M927-WB-00-12
99mm	black	6,5W	680lm	45°	3000K	ON/OFF	16457-M930-WB-00-12
195mm	black	13W	1270lm	45°	2700K	ON/OFF	16458-M927-WB-00-12
195mm	black	13W	1270lm	45°	2700K	DALI	16458-M927-WB-DA-12
195mm	black	13W	1370lm	45°	3000K	ON/OFF	16458-M930-WB-00-12
196mm	black	13W	1370lm	45°	3000K	DALI	16458-M930-WB-DA-12




voltage range 45-50V
aqform.com/**RA1117**

colour	power	flux	CCT	control	catalogue number
black	12,5W	1350lm	2700K	ON/OFF	16461-M927-D9-00-12
black	12,5W	1410lm	3000K	ON/OFF	16461-M930-D9-00-12




voltage range 45-50V
aqform.com/**RA0117**

colour	power	flux	CCT	control	catalogue number
black	12,5W	1550lm	3000K	ON/OFF	16342-M930-D9-00-12




voltage range 45-50V
aqform.com/**RA0017**

colour	power	flux	optics	CCT	control	catalogue number
black	10W	1200lm	50°	3000K	ON/OFF	16323-L930-WB-00-12
black	20,5W	2010lm	50°	3000K	ON/OFF	16323-M930-WB-00-12



voltage range 220-240V
aqform.com/**RA1016**

colour	power	flux	CCT	control	numer katalogowy
black	12,5W	1550lm	3000K	ON/OFF	16335-M930-D9-00-12



voltage range 220-240V
aqform.com/**RA0016**

The data for the standard LED product is provided for LED light sources.
Other product variants are available on our website.



Multitack



High multitack

The HIGH multitrack provides enough space to deeply conceal an adapter or even allow for the mounting of a light fixture so that it hides completely within the track.
An example is the TRU mini LED.

Tru



Private apartment, Gdańsk Garnizon
Design: Archem Wnętrza



Private house, Kielce
Design: Pracownia Projektowania Wnętrz Agnieszka Krasowska

SET TRU mini LED multitrack



SET TRU mini points multitrack



length	colour	power	flux	CCT	control	catalogue number
570mm	black	8W	1070lm	3000K	ON/OFF	16374-M930-D9-00-12
570mm	black	8W	1070lm	3000K	DALI	16374-M930-D9-DA-12
1140mm	black	16W	2140lm	3000K	ON/OFF	16375-M930-D9-00-12
1140mm	black	16W	2140lm	3000K	DALI	16375-M930-D9-DA-12



voltage range 45-50V
aqform.com/**SR3017**

length	colour	power	flux	optics	CCT	control	catalogue number
285mm	black	5W	710lm	59°	3000K	ON/OFF	16379-M930-WB-00-12
285mm	black	5W	710lm	59°	3000K	DALI	16379-M930-WB-DA-12
565mm	black	9,5W	1430lm	59°	3000K	ON/OFF	16380-M930-WB-00-12
565mm	black	9,5W	1430lm	59°	3000K	DALI	16380-M930-WB-DA-12



voltage range 45-50V
aqform.com/**SR3117**



The data for the standard LED product is provided for LED light sources.
Other product variants are available on our website.

Wall



Hotel-T, Waregem
Photo: I am Liz

PET micro R LED wall

Pet Micro



Grand Hotel, Łódź
Design: Grażyna Grzybek APAGBK, Dariusz Maryszewski
Photo: Rafał Dąbrowski




Hotel-T, Waregem
Photo: I am Liz

PET micro R LED wall




colour	power	flux	optics	CCT	control	catalogue number
black	2,5W	210lm	32°	2700K	ON/OFF	26504-M927-F3-00-12
white	2,5W	210lm	32°	2700K	ON/OFF	26504-M927-F3-00-13
black	2,5W	220lm	32°	3000K	ON/OFF	26504-M930-F3-00-12
white	2,5W	220lm	32°	3000K	ON/OFF	26504-M930-F3-00-13



voltage range 220-240V

aqform.com/**PE2012**

colour	power	flux	optics	CCT	control	catalogue number
black	2,5W	210lm	32°	2700K	ON/OFF	26508-M927-F3-00-12
white	2,5W	210lm	32°	2700K	ON/OFF	26508-M927-F3-00-13
black	2,5W	220lm	32°	3000K	ON/OFF	26508-M930-F3-00-12
white	2,5W	220lm	32°	3000K	ON/OFF	26508-M930-F3-00-13



voltage range 220-240V

aqform.com/**PE2112**

The data for the standard LED product is provided for LED light sources.
Other product variants are available on our website.




Pocket

colour	power	flux	CCT	control	catalogue number
white	3W	380lm	3000K	ON/OFF	20145-M930-DW-00-13


voltage range 220-240V

aqform.com/**PC1012**



accessory	catalogue number
mounting box for the luminaire POCKET	81023-11

The mounting box is needed only for instalation in concerete.





POCKET mini LED wall


The data for the standard LED product is provided for LED light sources.
Other product variants are available on our website.



Private apartment, Chwarzno, Gdynia
Design: Marta Komorowska-Koszałka,
pracownia bkm group.

Other colours and sizes available in 20 days.
More information on www.aqform.com

colour	power	flux	CCT	control	catalogue number
white	8,5W	1160lm	3000K	ON/OFF	26346-L930-D9-00-13




voltage range 220-240V

aqform.com/**SR1812**

>90 CRI · 230V · IP44

SET RAW mini 58 LED hermetic wall

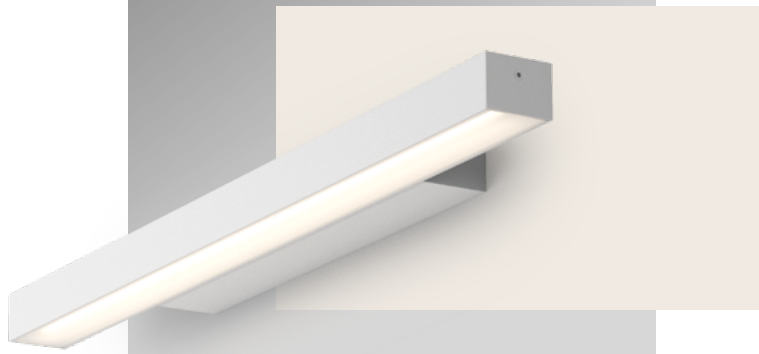

The data for the standard LED product is provided for LED light sources.
Other product variants are available on our website.


Exterior



VIP round up&down LED 230V exterior wall



colour	power	flux	optics	CCT	control	catalogue number
black	8W	660lm	27°	2700K	Phase-Control	47029-M927-F3-PH-12
white	8W	660lm	27°	2700K	Phase-Control	47029-M927-F3-PH-13
black	8W	680lm	27°	3000K	Phase-Control	47029-M930-F3-PH-12
white	8W	680lm	27°	3000K	Phase-Control	47029-M930-F3-PH-13




voltage range 220-240V

aqform.com/**PE0974**




The data for the standard LED product is provided for LED light sources.
Other product variants are available on our website.

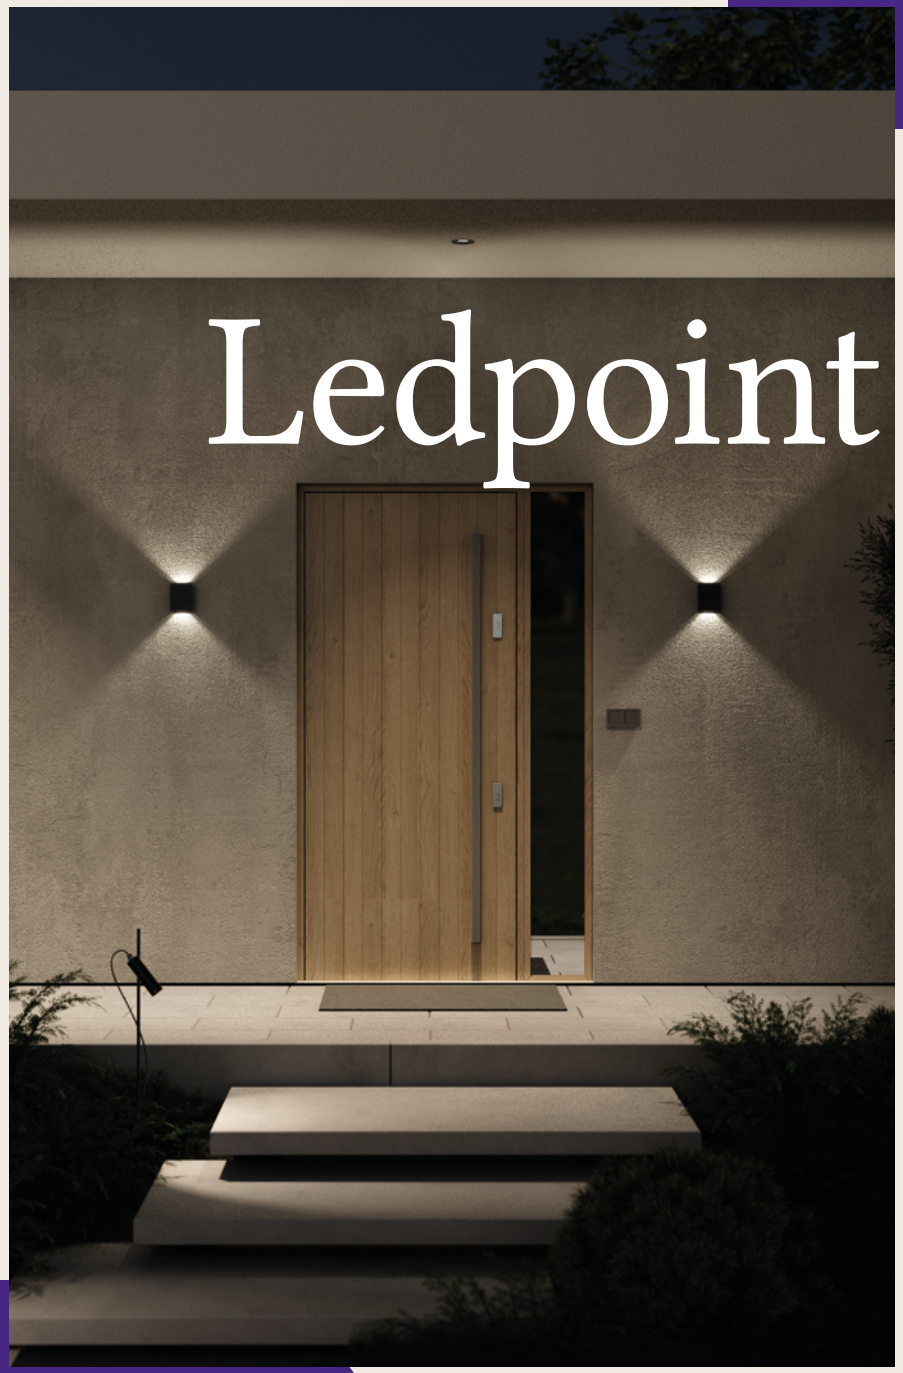

Ledpoint


ROZŚWIETLONE

LEDPOINT round exterior wall



LEDPOINT round up&down exterior wall



LEDPOINT square exterior wall



LEDPOINT square up&down exterior wall



colour	power	flux	optics	CCT	control	catalogue number
black	3W	370lm	68°	2700K	ON/OFF	26544-M927-WB-00-12
black	3W	380lm	68°	3000K	ON/OFF	26544-M930-WB-00-12

voltage range 220-240V

aqform.com/**LP1912**



colour	power	flux	optics	CCT	control	catalogue number
black	6W	740lm	68°	2700K	ON/OFF	26545-M927-WB-00-12
black	6W	770lm	68°	3000K	ON/OFF	26545-M930-WB-00-12

voltage range 220-240V


aqform.com/**LP2912**



colour	power	flux	optics	CCT	control	catalogue number
black	3W	370lm	68°	2700K	ON/OFF	26546-M927-WB-00-12
black	3W	380lm	68°	3000K	ON/OFF	26546-M930-WB-00-12

voltage range 220-240V


aqform.com/**LP3912**



colour	power	flux	optics	CCT	control	catalogue number
black	6W	740lm	68°	2700K	ON/OFF	26547-M927-WB-00-12
black	6W	770lm	68°	3000K	ON/OFF	26547-M930-WB-00-12

voltage range 220-240V

aqform.com/**LP4912**



The data for the standard LED product is provided for LED light sources.
Other product variants are available on our website.






Vip



VIP round up&down LED 230V exterior wall

colour	power	flux	optics	CCT	control	catalogue number
black	12W	980lm	64°	2700K	Phase-Control	26541-M927-WB-PH-12
black	12W	1020lm	64°	3000K	Phase-Control	26541-M930-WB-PH-12




voltage range 220-240V

aqform.com/**VP2912**

VIP square up&down LED 230V exterior wall

colour	power	flux	optics	CCT	control	catalogue number
black	12W	980lm	60°	2700K	Phase-Control	26543-M927-WB-PH-12
black	12W	1020lm	60°	3000K	Phase-Control	26543-M930-WB-PH-12



voltage range 220-240V

aqform.com/**VP4912**

The data for the standard LED product is provided for LED light sources.
Other product variants are available on our website.

Drivers

HOW TO CHOOSE THE LED DRIVER?

1. The letter assigned to the luminaire (applies to recessed and plasterboard fittings) corresponds to the letter in the table column.

2. For each letter (that is luminaire) are assigned matching LED drivers, as well as the number of luminaires that can be connected in series to a given driver. We suggest not to connect the luminaires in a parallel configuration.

3. All LED drivers included in the table are in the protection class 2.

4. Do not combine different types of luminaires with 1 LED driver.

5. Always check the dimensions of the LED drivers to fit them in the designated place (e.g. plasterboard - the LED driver must pass through the mounting hole).

	Product code	Product name	Dimensions L x W x H [mm]	Min hole assembly [mm]	Current [mA]	Voltage min [V]	Voltage max [V]	G	H
01	81225	POWER SUPPLY On/Off 8W 350mA 2-22V	68 x 35 x 21,5	42	350	2	22	(1-1)	
02	81226	POWER SUPPLY On/Off 22W 125-500mA 5-44V	146,5 x 43,5 x 22	49	350	10	44	(1-2)	
					500	5	44		(1-2)
03	81227	POWER SUPPLY On/Off 23W 125-500mA 2,5-46V	138,4 x 30 x 21	38	350	2,5	46	(1-2)	
					500	2,5	46		(1-2)
04	81223	POWER SUPPLY On/Off 30W 350-725 mA 2-44V	146,5 x 43,5 x 22	49	350	10	44	(1-2)	
					500	8	44		(1-2)
05	81228	POWER SUPPLY On/Off 36W 150-900mA 2,5-50V	163 x 30 x 21	38	350	2,5	50	(1-2)	
					500	2,5	50		(1-2)
06	81229	POWER SUPPLY On/Off 40W 300-1050mA 5-44V	146,5 x 43,5 x 22	50	350	15	44	(1-2)	
					500	9	43		(1-2)
07	81220	POWER SUPPLY Phase-Control 10W 350mA 12-28V	102 x 38 x 21	45	350	12	28	(1-1)	
08	81221	POWER SUPPLY Phase-Control 10W 500mA 9-20V	102 x 38 x 21	45	500	9	20		(1-1)
09	81239	POWER SUPPLY Phase-Control 20W 350-500mA 26-38V	138 x 44 x 30	54	350	26	38	(2-2)	
10	81233	POWER SUPPLY Phase-Control 20W 250-900mA 7-44V	148 x 38 x 26,5	49	350	7	44	(1-2)	
					500	7	40		(1-2)
11	81234	POWER SUPPLY Phase-Control 21W 500mA 25-42V	115 x 41 x 25	50	500	25	42		(2-2)
12	81235	POWER SUPPLY DALI 23W 150-700mA 2,5-46V	138,4 x 30 x 21	38	350	2,5	46	(1-2)	
					500	2,5	46		(1-2)
13	81222	POWER SUPPLY DALI 26W 250-700 mA 10-49V	146,5 x 43,5 x 22	50	350	10	48	(1-2)	
					500	10	46		(1-2)
14	81236	POWER SUPPLY DALI 35W 250-1000mA 8-42V	139 x 42 x 30	52	350	8	42	(1-2)	
					500	8	42		(1-2)
15	81237	POWER SUPPLY DALI 36W 150-900mA 2,5-50V	163 x 30 x 21	38	350	2,5	50	(1-2)	
					500	2,5	50		(1-2)

PART OF
DELTALIGHT
Group

All dimensions and technical data in catalogues are provided for a guidance purposes only. Actual data may differ slightly due to the production process. Technical information contained within Aquaform's website, data sheets or mounting instructions shall prevail over the information contained in catalogues. Aquaform Inc. reserves the right to change the presented materials and product specifications without prior notice.

Aquaform Inc. takes no responsibility for any possible misprints. All photos, icons and images are copyright protected. Images are illustrative presentations of products and colours. Due to the production process RAL colour of white track and adapter differs a few tones from a standard white finish of AQForm luminaires.

Information contained in the catalogue shall not constitute an offer, also within the meaning of art. 66 § 1 of Polish Civil Code.

c 2024 AQUAFORM Inc. sp. z o.o.
All rights reserved.

QUICK SHIPMENT

24
25

QUICK

www.aqform.com